

Photo-cell controller - Professional Line

NightMatic 5000-3

DALI-2 Application Controller - black

EAN 4007841 033729



Twilight switch +
eco-mode

2000w

max. 2000 W



IP54



2 - 1000 lux



manufacturer's
warranty
steinel-professional.de/garantie



CE



VDE

Function description

Intelligent lighting control. NightMatic 5000-3 photo-electric lighting controller for indoors and out, ideal for illuminating shop windows, advertising and specific areas through the night, diffuse light measurement for monitoring the complete ambient brightness, unique night economy mode.

Technical specifications

Type	Photo-cell controller	Functions	Normal / test mode, Manual ON / ON-OFF, Constant-lighting control ON-OFF
Dimensions (L x W x H)	42 x 95 x 95 mm	Settings via	Remote control, Potentiometers, Smart Remote
Mains power supply	220 – 240 V / 50 – 60 Hz	IP-rating	IP54
Sensor Technology	Light sensor	Material	Plastic
Application, place	Indoors	Ambient temperature	-20 – 50 °C
Installation site	wall, corner	Colour	black
Installation	Surface wiring	Colour, RAL	9005
Twilight setting	2 – 1000 lx	Manufacturer's Warranty	5 years
Control output, Dali	Broadcast 1x30 electronic ballasts	Version	DALI-2 Application Controller - black
Basic light level function	Yes	PU1, EAN	4007841033729

Accessories


EAN 4007841 648015	Corner wall mount 3000
EAN 4007841 035174	Corner wall mount 3000
EAN 4007841 559410	Service remote control RC8

NightMatic 5000-3

DALI-2 Application Controller - black

EAN 4007841 033729

Dimension Drawing

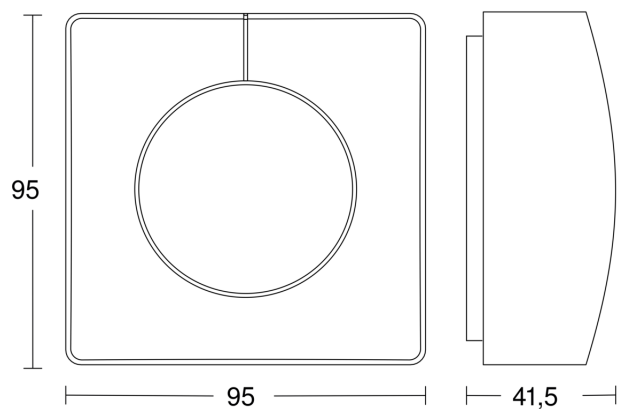

Master circuit diagram

