

Presence detector

IR Micro

LiveLink

EAN 4007841 009748

STEINEL[®]
PROFESSIONAL



Infrared sensor
max. 4 x 4 m
presence



2 - 1000 lux



30 sec - 30 min



ideal 2,5 - 4 m

TEACH

Teach mode



iQ-mode



energy saving



manufacturer's
warranty
steinel-professional.de/garantie



CE

Function description

Small. Round. Slim. Compact, inconspicuous single workstation solution. IR Micro LiveLink 360° passive infrared sensor with a presence detection zone of 4 x 4 m (presence and radial) or 6 x 6 m (tangential). Easy step-by-step configuration via LiveLink app. With patented multi-segment pyro sensor and eight user-friendly functions. Max. mounting height: 2.8 m. Colour finish: white.

Technical specifications

Type	Presence detector
Dimensions (Ø x H)	80 x 21 mm
Power supply, detail	DALI bus
Number of Dali users	2
Sensor Technology	passive infrared
Application, place	Indoors
Application, place, room	one-person office, hotel room, care room, function room / ancillary room, WC / washroom, indoors
Installation site	ceiling
Type of installation	Concealed wiring
Switching zones	168 switching zones
Electronic scalability	No
Mechanical scalability	No
Mounting height	2,00 – 5,00 m
Optimum mounting height	2,8 m
Detection angle	360 °
Angle of aperture	160 °
Sneak-by guard	Yes
Reach, radial	4 x 4 m (16 m ²)
Reach, presence	4 x 4 m (16 m ²)

Twilight setting TEACH	Yes
Twilight setting	2 – 2000 lx
Time setting	60 s – 60 Min.
Control output, Dali	Addressable/slave
LiveLink values	Light level, Motion detection
Constant-lighting control	Yes
Basic light level function	Yes
Settings via	LiveLink app
With remote control	No
Interconnection	Yes
IP rating	IP20
Material	Plastic
Ambient temperature	0 – 40 °C
Colour	white
Colour, RAL	9003
Manufacturer's Warranty	5 years
Version	LiveLink
PU1, EAN	4007841009748

<https://www.steinell.de>

Presence detector


IR Micro

LiveLink

EAN 4007841 009748

STEINEL[®]
PROFESSIONAL

Detection Zone

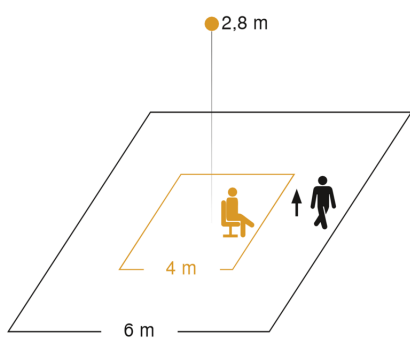

Mögliche Montagehöhe: 2,00 m – 5,00 m

Orange: Präsenz

Schwarz: tangential

Dimension Drawing

