

sensIQ S

EVO inox

EAN 4007841 034962



infrared sensor 3 x
100°



3 zones scalable
2-20m

2000w

max. 2000 W



IP54



2 - 2000 lux
daylight operation



5 sec - 15 min



ideal 2 - 5 m

TEACH

Teach mode



energy saving

5 JAHRE
HERSTELLER
GARANTIE

manufacturer's
warranty
[steinel-professional.de/garantie](https://www.steinel.de/garantie)

Function description

The evolution of perfection. The sensIQ S is just as perfect as its larger role model. For indoors and outdoors, ideal for building entrances, loading bays, for mounting heights of up to 5 m, quadruple sensor system for optimum surveillance over 3x100° coverage angle, 20 m reach (tangential), reach setting to the accuracy of a metre in 3 independent directions. Remote control and corner wall mount bracket included.


Technical specifications

Type	Motion detectors	Reach, radial	r = 4 m (42 m ²)
Type of accessory	Corner adapter	Reach, tangential	r = 20 m (1047 m ²)
Dimensions (L x W x H)	128 x 114 x 74 mm	Twilight setting TEACH	Yes
Mains power supply	100 – 240 V / 50 – 60 Hz	Twilight setting	2 – 2000 lx
Power supply, detail	500 VA max., 120 V	Time setting	5 s – 15 Min.
Sensor Technology	passive infrared	Switching output 1, resistive	2000 W
Application, place	Indoors, Outdoors	Constant-lighting control	No
Application, place, room	multi-storey / underground car park, outdoors, warehouse, front door, all round the building, courtyard & driveway, Indoors	Basic light level function	No
		Functions	Normal / test mode, Manual ON / ON-OFF
Installation site	wall, corner	Settings via	Remote control, Potentiometers, Smart Remote
Installation	Surface wiring	With remote control	Yes
Switching zones	1360 switching zones	Interconnection	Yes
Electronic scalability	No	IP-rating	IP54
Mechanical scalability	Yes	Material	Plastic
Mounting height	2,00 – 5,00 m	Ambient temperature	-20 – 50 °C
Optimum mounting height	2 m	Colour	Silver
Detection angle	300 °	IDs, certificates	VDE
Angle of aperture	90 °	Manufacturer's Warranty	5 years
Sneak-by guard	Yes	Version	inox
Capability of masking out individual segments	Yes	PU1, EAN	4007841034962
Reach, detail	Reach adjustable from 2 - 20 m in 3 directions (100° in each)		

Accessories

EAN 4007841 007638	Remote control RC9
EAN 4007841 608804	Corner wall mount sensIQ S
EAN 4007841 608835	Corner wall mount sensIQ S
EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 608828	Corner wall mount sensIQ S

Detection Zone

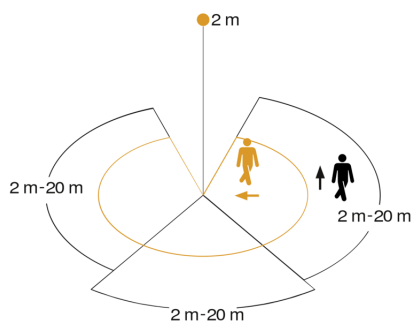


Mögliche Montagehöhe: 2,00 m – 5,00 m

Orange: radial


Schwarz: tangential

3 skallerbare Zonen


Dimension Drawing

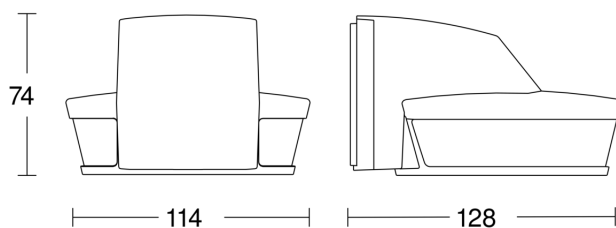


Light without neutral conductor

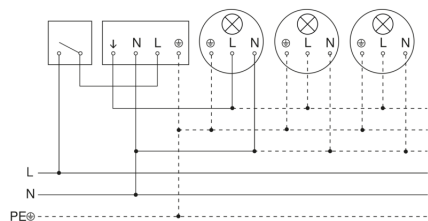

Light with neutral conductor

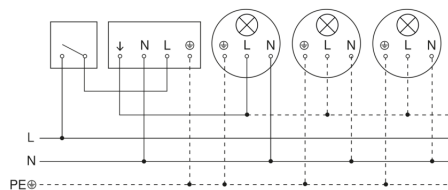

Connection using two-circuit switch for manual and automatic operation

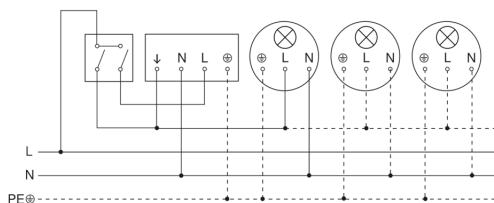

Connection via a two-way switch for manual override and automatic operation

