

HF 3360

DALI-2 Input Device - concealed, sq.
 EAN 4007841 057336
 Article number 057336



high frequency sensor
360°



max. Ø 8 m



IP20



2 - 1000 lux



ideal 2 - 2,8 m



energy saving

5 years

manufacturer's warranty
 steinel-professional.de/
 garantie



CE

Function description

Perfection through and through. High-frequency motion detector HF 3360, ideal for basement corridors, stairwells, multi-storey car parks, installation height 2.8 m, 360° angle of coverage, reach 1 – 8 m (radial), detection regardless of temperature, HF-sensor technology also detects movement through glass, wood and stud walls. Available either in round or square surface-mounted and concealed version. DALI-2 Input Device enables sensors to communicate collected sensor data to higher-level lighting management systems (e.g. LiveLink).

Technical specifications

| | | | |
|----------------------------|--|---|---|
| Dimensions (L x W x H) | 64 x 94 x 94 mm | Mounting height max. | 4,00 m |
| With motion detector | Yes | Optimum mounting height | 2,8 m |
| Manufacturer's Warranty | 5 years | HF-system | 5,8 GHz |
| Settings via | Bus | Detection | also through glass, wood and stud walls |
| With remote control | No | Detection angle | 360 ° |
| Version | DALI-2 Input Device - concealed, sq. | Angle of aperture | 180 ° |
| PU1, EAN | 4007841057336 | Sneak-by guard | Yes |
| Type | Motion detectors | Capability of masking out individual segments | No |
| Application, place | Indoors | Electronic scalability | Yes |
| Application, room | function room / ancillary room, stairwell, WC / washroom, multi-storey / underground car park, Indoors | Mechanical scalability | No |
| Colour | white | Reach, radial | Ø 8 m (50 m²) |
| Colour, RAL | 9003 | Reach, tangential | Ø 8 m (50 m²) |
| Includes corner wall mount | No | Transmitter power | < 1 mW |
| Installation site | wall, ceiling, corner | Twilight setting | 2 – 1000 lx |
| | | Basic light level function | No |

HF 3360

DALI-2 Input Device - concealed, sq.
EAN 4007841 057336
Article number 057336



Technical specifications

| | | | |
|----------------------|---|--|--------------|
| Installation | Concealed wiring, Wall, Ceiling, corner | Main light adjustable | No |
| IP-rating | IP20 | Twilight setting TEACH | No |
| Ambient temperature | -20 – 50 °C | Constant-lighting control | No |
| Material | Plastic | Interconnection | Yes |
| Mains power supply | 12 – 22,5 V | Type of interconnection | Master/slave |
| Power consumption | 0,5 W | Interconnection via | DALI bus |
| Power supply, detail | DALI bus | Max. Current consumption according to IEC 62386-101 | 24 mA |
| Number of Dali users | 5 | Typical current consumption at 16V input voltage | 8 mA |
| Control output, Dali | Addressable/slave | Max. Current consumption at 10V input voltage in regular operation | 12 mA |
| Technology, sensors | High frequency, Light sensor | | |
| Mounting height | 2,00 – 4,00 m | | |


Accessories

| | |
|--------------------|-----------------------------|
| EAN 4007841 009151 | Remote control Smart Remote |
| EAN 4007841 035174 | Corner wall mount 3000 |
| EAN 4007841 056681 | Black cover for HF 3360 |

HF 3360


DALI-2 Input Device - concealed, sq.
EAN 4007841 057336
Article number 057336

Detection Zone

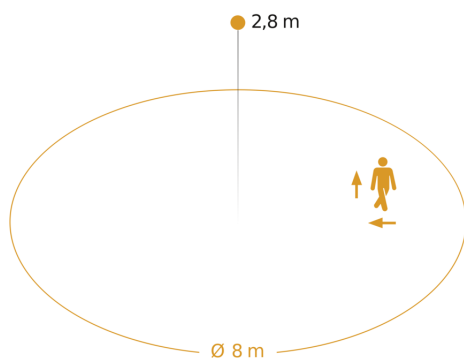

Possible mounting height: 2,00 m – 4,00 m
Orange: radial and tangential

Dimension Drawing

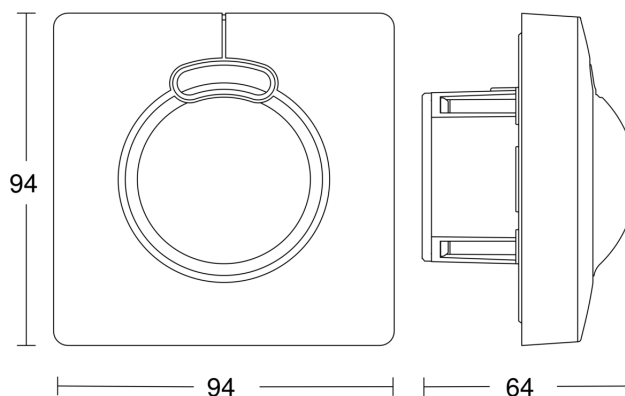

Circuit diagram

