

# sensIQ S

V3 Anthracite

EAN 4007841 059583

Article number 059583

infrared sensor 3 x  
100°3 zones scalable  
2-20m

KNX



IP54



2 - 1000 lux



1 min - 15 min



ideal 2 - 5 m

Teach

Teach mode



energy saving

5 years

manufacturer's  
warranty steinel-  
professional.de/  
garantie

## Function description

The evolution of perfection. The sensIQ S is just as perfect as its larger role model. For indoors and outdoors, ideal for building entrances, loading bays, for mounting heights of up to 5 m, quadruple sensor system for optimum surveillance over 3x100° coverage angle, 20 m reach (tangential), reach setting to the accuracy of a metre in 3 independent directions. Remote control and corner wall mount bracket included.

## Technical specifications

Dimensions (L x W x H)	128 x 114 x 74 mm
Manufacturer's Warranty	5 years
Settings via	ETS software, Remote control, Bus, Smart Remote
With remote control	Yes
Version	Anthracite
PU1, EAN	4007841059583
Type	Motion detectors
Application, place	Indoors, Outdoors
Application, room	multi-storey / underground car park, outdoors, warehouse, front door, all round the building, courtyard & driveway, Indoors
Colour	Anthracite
Colour, RAL	7016
Includes corner wall mount	Yes
Installation site	wall, corner
Installation	Surface wiring, Wall, corner

Detection angle	300 °
Angle of aperture	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	Yes
Reach, radial	r = 4 m (42 m <sup>2</sup> )
Reach, tangential	r = 20 m (1047 m <sup>2</sup> )
Twilight setting	2 – 1000 lx
Time setting	60 s – 15 Min.
Basic light level function	Yes
Main light adjustable	0 - 100 %
Twilight setting TEACH	Yes
Constant-lighting control	Yes
KNX functions	Light output 2x, Presence output, Light level, Constant-lighting control, Basic light level function,

# sensIQ S

V3 Anthracite  
EAN 4007841 059583  
Article number 059583




## Technical specifications

Ambient temperature	-20 – 50 °C
With bus coupling	Yes
Mounting height	2 – 5,00 m
Mounting height max.	5,00 m
Optimum mounting height	2 m

	Photo-cell controller, Close range, Individual pyro evaluation, Logic gate
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Interconnection via	KNX bus
Rated current	10 mA

## Detection Zone

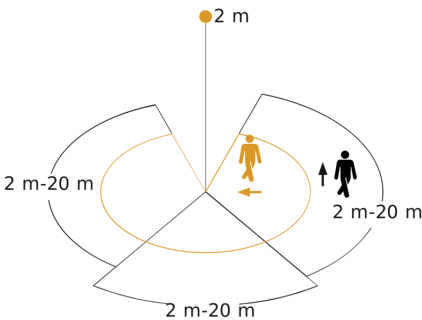

Possible mounting height: 2,00 m – 5,00 m  
Orange: radial  
Black: tangential  
3 scalable zones

## Dimension Drawing

