

IS 2360-3 ECO 24m

black
EAN 4007841 081706
Article number 081706



Infrarot-Sensor 360°



Max. ø 24 m

2000 W

2000 W Max. (LED-fähig)



IP54



2 - 1000 Lux



5 Sek - 15 Min



Energie sparen

5 years

Herstellergarantie
steinel-professional.de/
garantie



CE

Function description

The multi-talent for indoors and outdoors. Infrared wall sensor IS 2360-3 ECO, 3 pyro sensors for a 360° angle of coverage, reach can be set up to 12 m, selectable time and twilight threshold, detection zone can be customised with shrouds.

Technical specifications

Dimensions (Ø x H)	121 x 57 mm
With motion detector	Yes
Manufacturer's Warranty	5 years
Settings via	Potentiometers
With remote control	No
Version	black
PU1, EAN	4007841081706
Type	Motion detectors
Application, place	Outdoors, Indoors
Application, room	corridor / aisle, changing room, function room / ancillary room, kitchenette, stairwell, WC / washroom, multi-storey / underground car park, outdoors, warehouse, Indoors
Colour	black
Colour, RAL	9005
Includes corner wall mount	No
Installation site	ceiling

Technology, sensors	passive infrared, Light sensor
Mounting height	2,50 – 6,00 m
Mounting height max.	6,00 m
Optimum mounting height	2,8 m
Detection angle	360 °
Angle of aperture	90 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	Ø 6 m (28 m ²)
Reach, tangential	Ø 24 m (452 m ²)
Switching zones	972 switching zones
Abdeckmaterial Lieferumfang	shrouds
Twilight setting	2 – 1000 lx
Time setting	5 s – 15 Min.
Basic light level function	No

IS 2360-3 ECO 24m

black
EAN 4007841 081706
Article number 081706



Technical specifications

Installation	Surface wiring, Ceiling
IP-rating	IP54
Protection class	II
Ambient temperature	-20 – 50 °C
Material	Plastic
Mains power supply	220 – 240 V / 50 – 60 Hz
Switching output 1, resistive	2000 W
Switching output 1, number of LEDs / fluorescent lamps	8 pcs.
Switching output 1, floating	No
Switching output 1, low-voltage halogen lamps	1000 VA
Power consumption	0,56 W

Main light adjustable	No
Twilight setting TEACH	No
Constant-lighting control	No
Interconnection	Yes
Type of interconnection	Master/master
Interconnection via	Cable
Interconnection, number	max 5 sensors


IS 2360-3 ECO 24m

black

EAN 4007841 081706

Article number 081706

Detection Zone

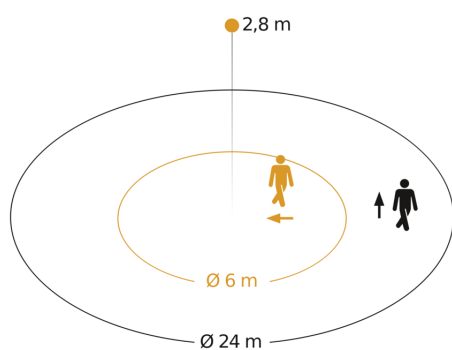


Possible mounting height: 2,50 m – 6,00 m

Orange: radial

Black: tangential

Dimension Drawing

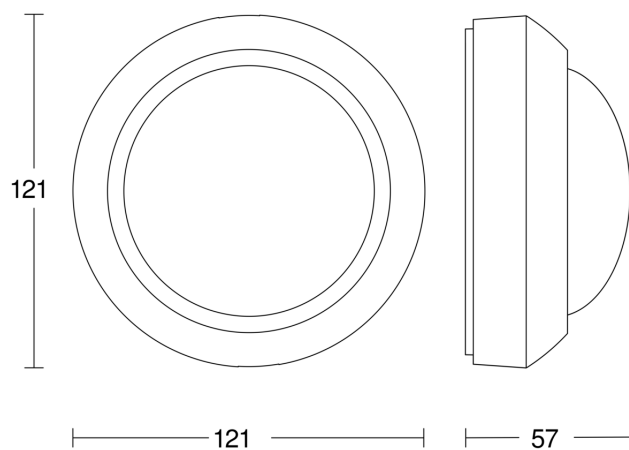

Circuit diagram

