

# IR Quattro HD 24m

COM1 - in-ceiling installation white  
 EAN 4007841 079369  
 Article number 079369



infrared sensor  
360°



max. 8 x 8 m  
presence

HD

4800 zones

2000 W

2000 W max. (LED-  
ready)



ideal 2,5 - 10 m



indoor sensor

iQ

iQ-mode



energy saving

5 years

manufacturer's  
warranty steinel-  
professional.de/  
garantie



CE

## Function description

Detection no finer! Infrared presence detector Presence Control PRO IR Quattro HD COM1 for indoors, ideal for medium to large-size offices, conference and meeting rooms, classrooms and lecture theatres, sports halls and warehouses, installation height up to 10 m, for switching light 'ON' and 'OFF', 4800 switching zones for the ultimate in detection quality, presence detection over a true 64 m<sup>2</sup>, square detection zone, mechanically scalable.

## Technical specifications

Dimensions (L x W x H)	108 x 120 x 120 mm
Manufacturer's Warranty	5 years
Settings via	Remote control, DIP switches, Potentiometers, Smart Remote
With remote control	No
Version	COM1 - in-ceiling installation white
PU1, EAN	4007841079369
Type	Presence detector
Application, place	Indoors
Application, room	classroom, lecture hall, open-plan office, high-bay warehouse, production facilities, conference room / meeting room, duty room, recreation room, changing room, sports hall, reception / lobby, multi-storey / underground car park
Colour	white
Colour, RAL	9010
Includes corner wall mount	No

Optimum mounting height	2,8 m
Detection angle	360 °
Angle of aperture	160 °
Sneak-by guard	Yes
Capability of masking out individual segments	No
Electronic scalability	No
Mechanical scalability	Yes
Reach, radial	8 x 8 m (64 m <sup>2</sup> )
Reach, tangential	20 x 20 m (400 m <sup>2</sup> )
Reach, presence	8 x 8 m (64 m <sup>2</sup> )
Switching zones	4800 switching zones
Functions	Normal / test mode, Semi-/fully automatic, Pushbutton / switch mode, Manual ON / ON-OFF, Constant-lighting control ON-OFF
Time setting	30 s – 30 Min.
Basic light level function	No

# IR Quattro HD 24m

COM1 - in-ceiling installation white  
EAN 4007841 079369  
Article number 079369



## Technical specifications

Installation site	ceiling
Installation	In-ceiling installation, Ceiling
IP-rating	IP20
Ambient temperature	-25 – 55 °C
Material	Plastic
Mains power supply	230 V / 50 – 60 Hz
Sensor Technology	Passive infrared
Mounting height	2,50 – 10,00 m
Mounting height max.	10,00 m

Main light adjustable	No
Twilight setting TEACH	Yes
Constant-lighting control	No
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Interconnection via	Cable

## Accessories

EAN 4007841 003036	Control PRO guard cage
EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 559410	Service remote control RC8


# IR Quattro HD 24m

COM1 - in-ceiling installation white

EAN 4007841 079369

Article number 079369

## Detection Zone

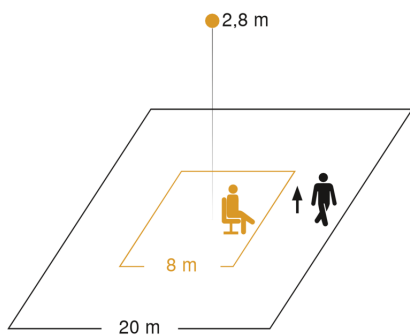


Mögliche Montagehöhe: 2,50 m – 10,00 m


Orange: Präsenz

Schwarz: tangential


## Dimension Drawing 1

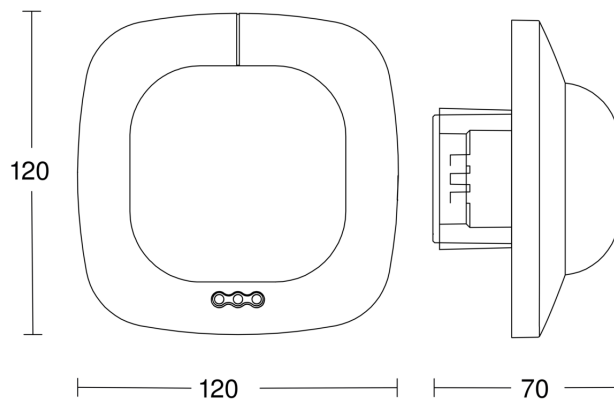

## Dimension Drawing 2

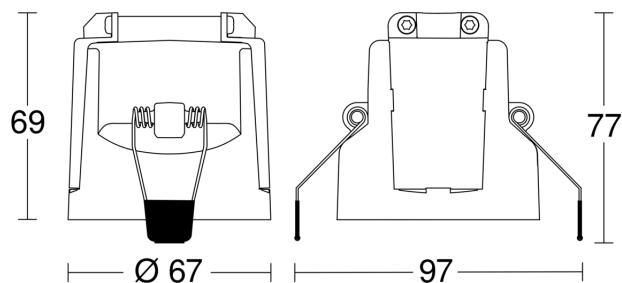

## Master circuit diagram

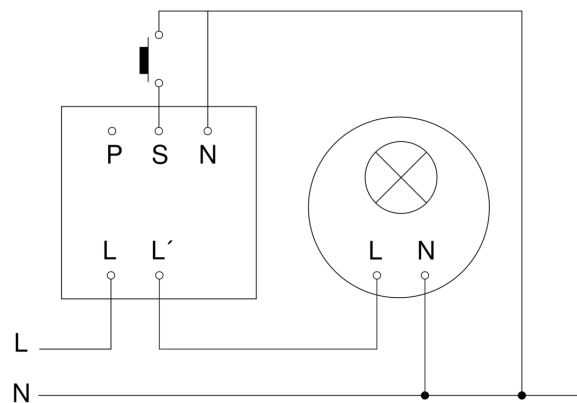


# IR Quattro HD 24m

COM1 - in-ceiling installation white

EAN 4007841 079369

Article number 079369

## Master/master interconnection circuit diagram

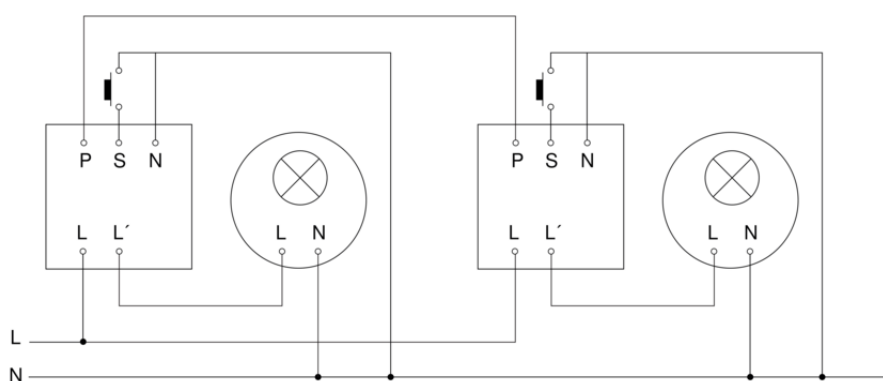

## Master/slave interconnection circuit diagram

