

Presence detector - Professional Line

IR Quattro MICRO 6m

COM1 - black

EAN 4007841 068639

Article number 068639



infrared sensor 360°



max. 4 x 4 m presence

1000 W

1000 W max. (LED-ready)



IP65



2 - 1000 lux



5 sec - 60 min

5 years

manufacturer's warranty steinel-professional.de/garantie



CE



VDE

Function description

Small sensor. Great performance. The IR Quattro MICRO meets the wish of many architects and planners for a sensor that's as inconspicuous as possible. It impresses with its compact size after installation, low overall height and a micro precision lens (15 x 15 mm). At the same time, the small 360° infrared presence puts on a great performance, covering 36 m². IP65 certification also makes it suitable for rooms exposed to moisture.

Technical specifications

Dimensions (Ø x H)	43 x 75 mm
With motion detector	Yes
Manufacturer's Warranty	5 years
Settings via	Remote control, Smart Remote
With remote control	No
Version	COM1 - black
PU1, EAN	4007841068639
Type	Presence detector
Application, place	Indoors
Application, room	one-person office, hotel room, care room, function room / ancillary room, WC / washroom, Indoors
Colour	black
Colour, RAL	9005
Includes corner wall mount	No
Installation site	ceiling
Installation	In-ceiling installation, Ceiling

LED lamps > 2 W < 8 W	300 W
LED lamps > 8 W	600 W
Capacitive load in µF	176 µF
Power consumption	0,5 W
Technology, sensors	Photo-cell controller, passive infrared
Mounting height	2,00 – 5,00 m
Mounting height max.	5,00 m
Optimum mounting height	2,8 m
Detection angle	360 °
Angle of aperture	90 °
Sneak-by guard	Yes
Capability of masking out individual segments	No
Electronic scalability	No
Mechanical scalability	No
Reach, radial	4 x 4 m (16 m²)

<https://www.steinel.de>

Subject to technical modifications

06.2023 Page 1 from 4

IR Quattro MICRO 6m

COM1 - black
EAN 4007841 068639
Article number 068639



Technical specifications

IP-rating	IP65
Ambient temperature	-25 – 55 °C
Material	Plastic
Mains power supply	220 – 240 V / 50 – 60 Hz
Switching output 1, resistive	1000 W
Switching output 1, number of LEDs / fluorescent lamps	8 pcs.
Switching output 1, floating	No
Fluorescent lamps, electronic ballast	500 W
Fluorescent lamps, uncorrected	400 VA
Fluorescent lamps, series-corrected	400 VA
Fluorescent lamps, parallel-corrected	400 VA
Switching output 1, low-voltage halogen lamps	1000 VA
LED lamps < 2 W	100 W

Reach, tangential	6 x 6 m (36 m²)
Reach, presence	4 x 4 m (16 m²)
Switching zones	168 switching zones
Twilight setting	2 – 1000 lx
Time setting	5 s – 60 Min.
Basic light level function	No
Main light adjustable	No
Twilight setting TEACH	Yes
Constant-lighting control	No
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Interconnection via	Cable

Accessories

EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 592806	User remote control RC5
EAN 4007841 559410	Service remote control RC8


IR Quattro MICRO 6m

COM1 - black


EAN 4007841 068639

Article number 068639

Detection Zone

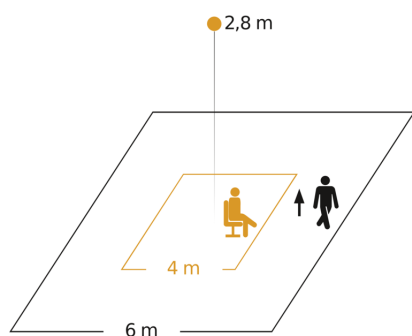

Dimension Drawing

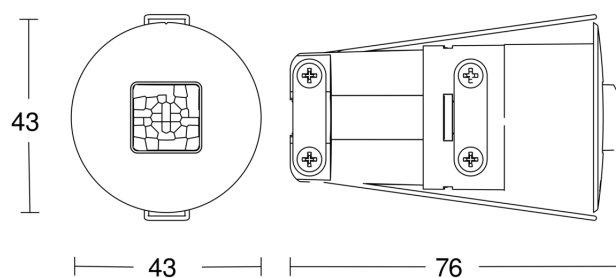


Possible mounting height: 2,00 m - 5,00 m

Orange: presence

Black: tangential

Master circuit diagram

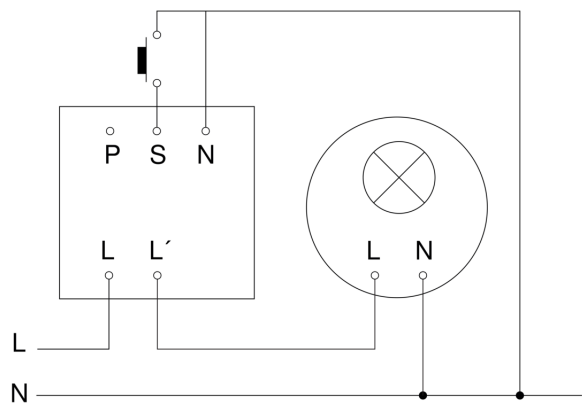


IR Quattro MICRO 6m

COM1 - black

EAN 4007841 068639

Article number 068639

Master/master interconnection circuit diagram

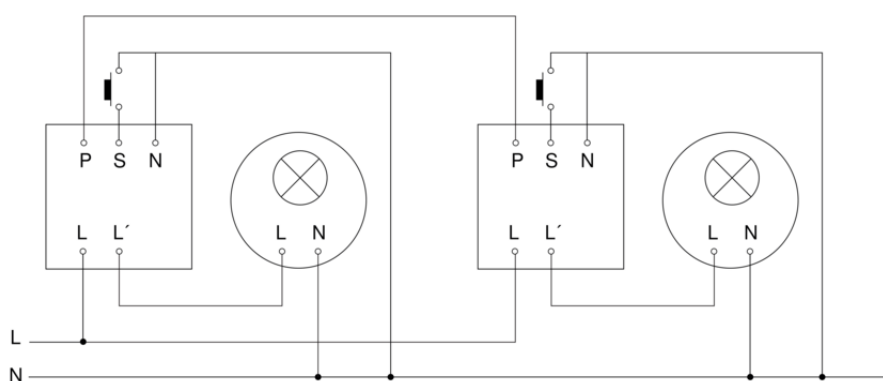

Master/slave interconnection circuit diagram

