

Wireless Switch Zigbee


Technical data

Voltage	3VDC
Power supply	3V (CR2430 battery) Expected battery life is 2 years in normal use
Transmission frequency	2.4GHz
Transmission range (free field)	30 m
Dimming	0.1%-100%
Exterior dimensions	L: 56 mm, W: 56 mm, H: 12 mm
IP-class	IP20
Material	Plastic
Environment	Indoors
Warranty	2 years
Approvals	CE



Product information

- RGB+CCT+DIM Wireless Switch Zigbee based on Zigbee 3.0
- Supports 1 group for binding max. 30 lighting devices
- Supports Touchlink to pair to a lighting device directly
- Long battery life mesh technology
- Transmission range up to 30 m
- Enables to bind and control Box Dimmer / Relay, RGBW and RGB+CCT Zigbee lighting devices
- Wireless Switch Zigbee is attached to the base by magnetism. It can therefore easily and quickly be dismantled and used as a portable remote control
- This device contains a button lithium battery that shall be stored and disposed properly
- **DO NOT** expose the device to moisture

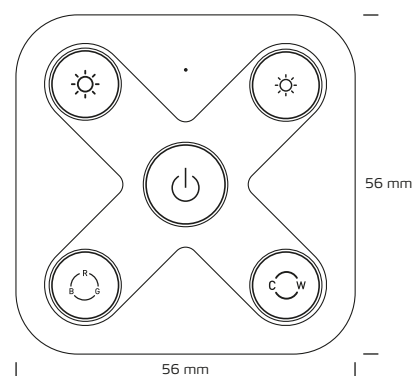

*The drawing is not drawn to scale

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour
98426061	5704629000933	White