

DALI PRO Sensor Coupler

DALI PRO Sensor Coupler | Sensors



Product family benefits

- Power supply from DALI


Areas of application

- Connection of light and presence sensors in DALI systems
- Ceiling or independent installation via ECO CI KIT possible

Product datasheet

Technical data

Dimensions & weight

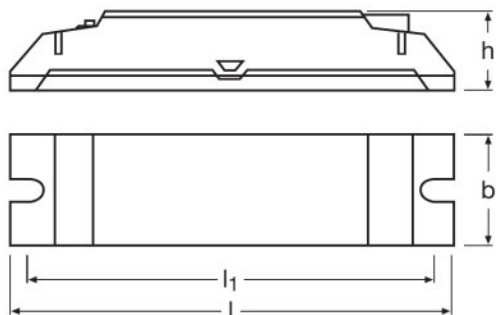

Length	118.0 mm
Width	30.0 mm
Height	21.0 mm
Product weight	35.00 g

Temperatures & operating conditions

Ambient temperature range	0...+50 °C
---------------------------	------------

Capabilities

Dimmable	No
Dimming interface	DALI
Number of control outputs	1
Type of installation	Luminaire integration/Ceiling integration

Certificates & standards

Type of protection	IP20
--------------------	------

Logistical data

Commodity code	853710989900
----------------	--------------

Equipment / Accessories

- Suitable for all light and presence sensors from the MULTI 3 range
- Can be used with DALI Professional or DALIeco light control system

Product datasheet

Download Data

File	
	User instruction DALI Sensor Coupler LSPD
	Declarations of conformity EC-DoC LMS Sensor Coupler and Sensor 9C1-3402820-EN-02 2019
	Declarations of conformity 334811_Declaration of conformity – DALI PRO CONT-4 – DALI PRO PB Coupler – DALI PRO Sen

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321379269	DALI PRO Sensor Coupler	Shipping carton box 25	200 mm x 140 mm x 147 mm	4.12 dm ³	1268.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.