

## Presence detectors - talis II P 360-8-2

Item 18.06.0017.1



### PRODUCT DESCRIPTION

This presence detector utilizes passive infrared technology (PIR) and is designed for flush mounting, but if desired can be converted for surface mounting with the talis II SM box 10 accessory. This way, it can be integrated discreetly, regardless of their surroundings' design. Setup is performed after installation using the rotary knobs on the side of the presence detector, which are then concealed behind a cover. That dual-channel variant P 360-8-2 lets you connect a second consumer via its second channel, for example an air-conditioning unit or heater. This presence detector offers a high energy efficiency through regular light balancing and offline function when there is sufficient daylight.

### APPLICATIONS

- ▶ Air Conditioning
- ▶ Building Entrances and Corridors
- ▶ Classrooms
- ▶ Copy Room
- ▶ Garage
- ▶ Heating
- ▶ Hotel Rooms
- ▶ HVAC Control Circuits
- ▶ Indoor/Outdoor Lighting
- ▶ Light Control and Ventilation
- ▶ Offices
- ▶ Outdoor Applications
- ▶ Residential
- ▶ Stairwells
- ▶ Storage Rooms
- ▶ Toilets
- ▶ Work and Meeting Spaces

### TECHNICAL DATA

General	
Model Number	18.06.0017.1
Description	talis II P 360-8-2
Statistic Goods #	000853650800000
Min Delivery Period	99
Substitution Flag	Not Applicable
Catalog Flag	False
Packaging Unit	48
Green Dot Mark	False
Pref Trade Agreement	False
EAN Code	4010940045982
Scope of application	Inside/Outside

Control Specifications	
Sensor Type	Passive Infra-Red (PIR)
Light level	approx. 10 Lux - infinite Lux; Lux Memory

Mechanical Specifications	
Mounting Options	Ceiling; Surface Mounting (with accessories only); False Ceiling

Dimensions	
------------	--

Product Height (mm)	80
Product Width (mm)	80
Product Depth (mm)	85

#### Material Specifications

Color	White (similar to RAL 9016)
Product Weight (kg)	0.156

#### Communication Method

Wired	2-Wire
-------	--------

#### Electrical Specifications

Supply Voltage	AC 230 V $\pm$ 10% 50-60 Hz
Load incandescent bulb	max. 2000 W
Load halogen lamp	1000 W (AC); 1000 VA / 900 W (LV Electronic); 1000 VA / 600 W (LV Conventional)
Load compact fluorescent lamp	max. 100 $\mu$ F (non-compensated)
Load LED lamp	max. 400 W
Load energy-saving bulbs	400 W; 600 VA; incl. CFL and PL lamp
Power consumption (Standby)	<1 VA
Parallel switching	Max 6 Sensors

#### Benefits

Channels	2
----------	---

#### Display and Format

Angle of detection	360°
Range small movements	Ø 3 m
Range walking towards	Ø 4 m
Range walking across	Ø 8 m
Installation height	2,5 m
Time setting (1CH)	approx. 5 sec. - 30 min
Time setting (2CH)	approx. 10 sec. - 60 min.

#### Operating Specifications

Operating mode	Impulse function; Test Mode; Learning Function
----------------	--

#### Environmental Specifications


Temperature (operation)	0°C..45°C
-------------------------	-----------

#### Standards and Certifications


Approval mark	CE
Protection class	II, According to Corresponding Mounting
Protection type	IP40
Standards and Guidelines	EN 55015; EN 60669-1; EN 61000-3-3; EN 61547; 2006/95/CE (LVD); EN 60660-2-1; 2004/108/CE (EMV); EN 61000-3-2

ANNEX


CIRCUIT DIAGRAMS

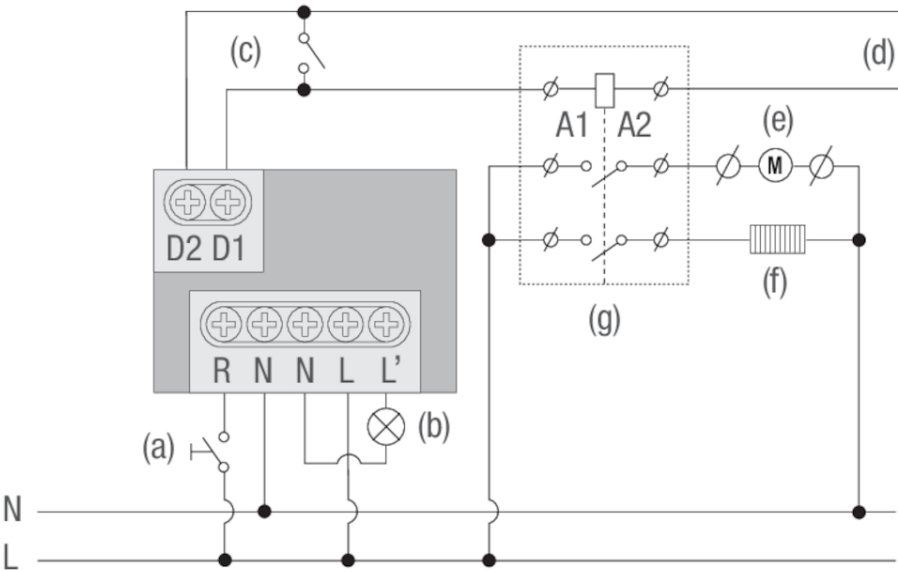

## RANGE DIAGRAMS

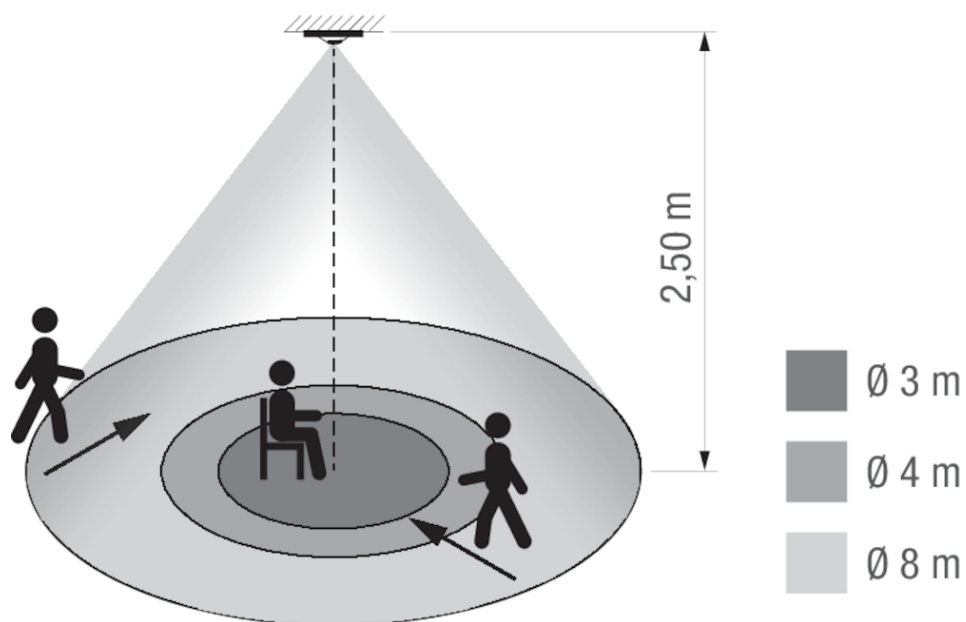

**DIMENSIONAL DRAWINGS**

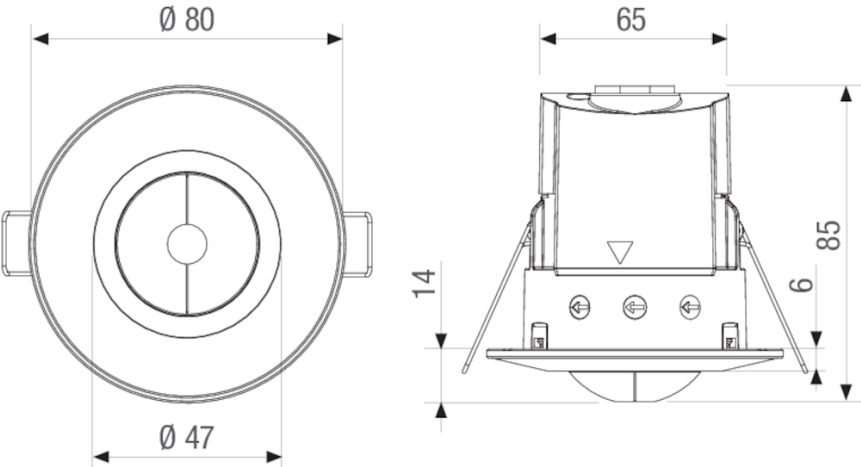

---

## ACCESSORIES



07.10.0003.1  
talis II SM BOX 10