

GUIDE - HOW TO MAKE SIMULTANEOUS COMMAND OF MORE GROUPS OF LATCHING RELAYS


ACCESSORIES FOR CENTRAL COMMAND AND GROUP COMMAND			
Code:		GWD6671 ⁽¹⁾	GWD6672
Type of accessory:		It must be mounted on relay	
Rated operating voltage (Ue):		(V)	250 AC
Rated insulation voltage (Ui):		(V)	440 AC
No. of modules:			0.5
Mechanical endurance (no. of operations):		1 x 10 ⁶	-
Rated tightening torque:		(Nm)	0.8
Terminal screw type			M3
Screwdriver suggested:			PZ1
Cable section:	rigid (mm ²)		1...4
	flexible (mm ²)		1...4
Weight		(g)	30

⁽¹⁾ Not available for relay with DC coil

The following codes are used to make a centralized command of one or more groups of relays

Code	Type	Number	Description
GW D6 671	Accessory that must be mounted on latching relay	1 for each latching relay of the group	Carry out the ON/OFF command of two or more relays from one point, independently from the status of each relay.
GW D6 672	Stand-alone accessory	1 for each group of relay	Carry out the simultaneously command of two or more groups of centralized relays independently from the status of each relay.

GW D6 671 - CENTRALIZED COMMAND OF 1 GROUP OF RELAY

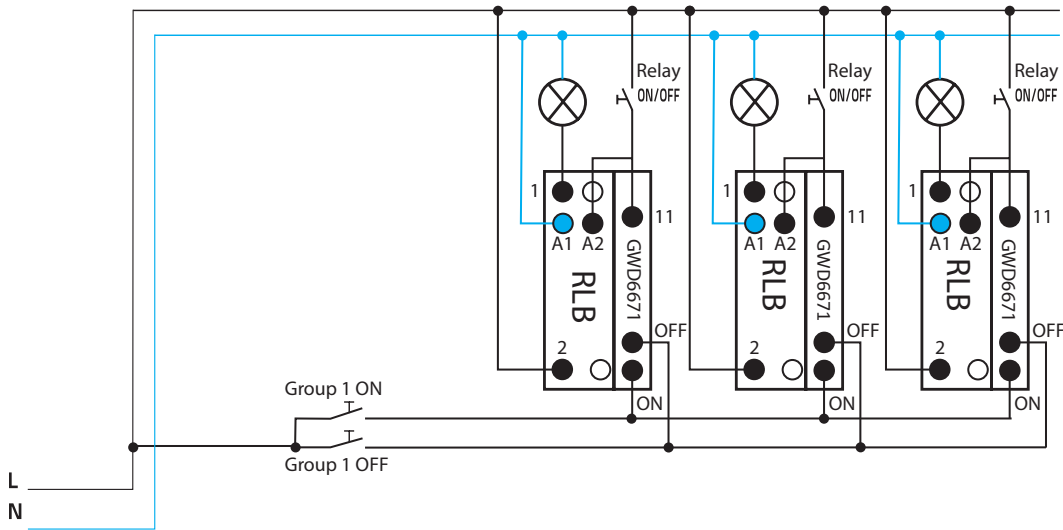

- Legend:
- **Push-button relay:** local command of relay
 - **Push-button of group:** centralized command of all group's relays, independently from the status of each relay

GW D6 672 - CENTRALIZED COMMAND OF MORE GROUPS OF RELAYS

