
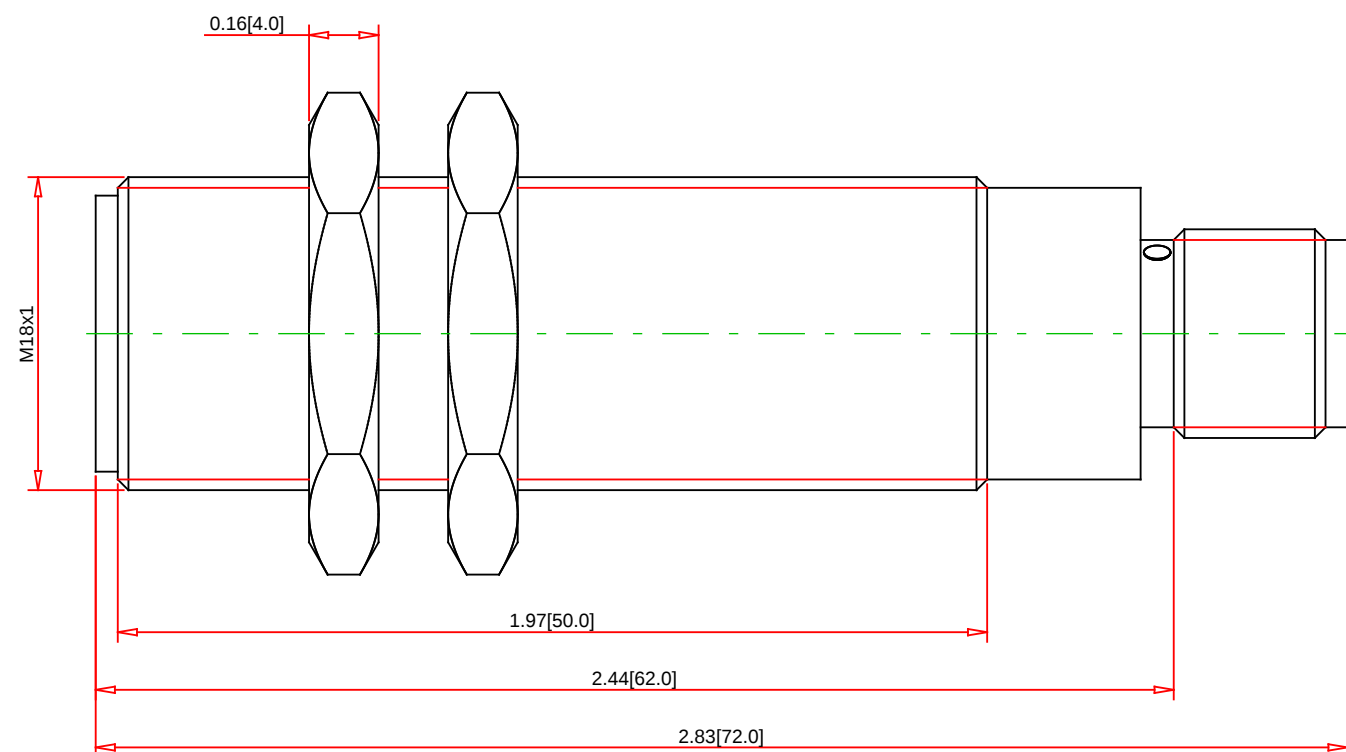


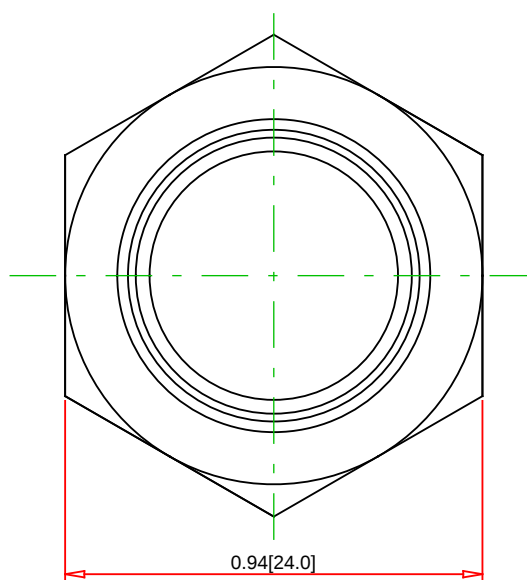

Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

XU8M18MA230K



Telemecanique
Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Diffuse with Background Suppression:

Diffuse:

Polarized Retroreflective:

Thru Beam:

Retroreflective:

Circuit Type:

Output Mode:

Power:

Voltage Range:

Max Load:

Max Switching Frequency :

Temp Range:

NEMA Type:

IP Rating:

Standards:

Light Operate

AC/DC

24-240

200 mA

25 Hz

-25° to 55° C (-13° to 131° F)

4X (indoor use only)

67

UL, CE Rohs

Specification:

Sensor Type:

Proximity Diffuse / Background Suppression

Description:

Photoelectric, Proximity Diffuse / Background Suppression, 18 mm Barrel, 24-240

Body Style:

Barrel

Diameter:

mm

Housing Material:

Metal - NPB

Face Material:

PMMA

Adjustment:

Yes

Cable Size:

Connector Type: 3-pin U20

Special Features: