



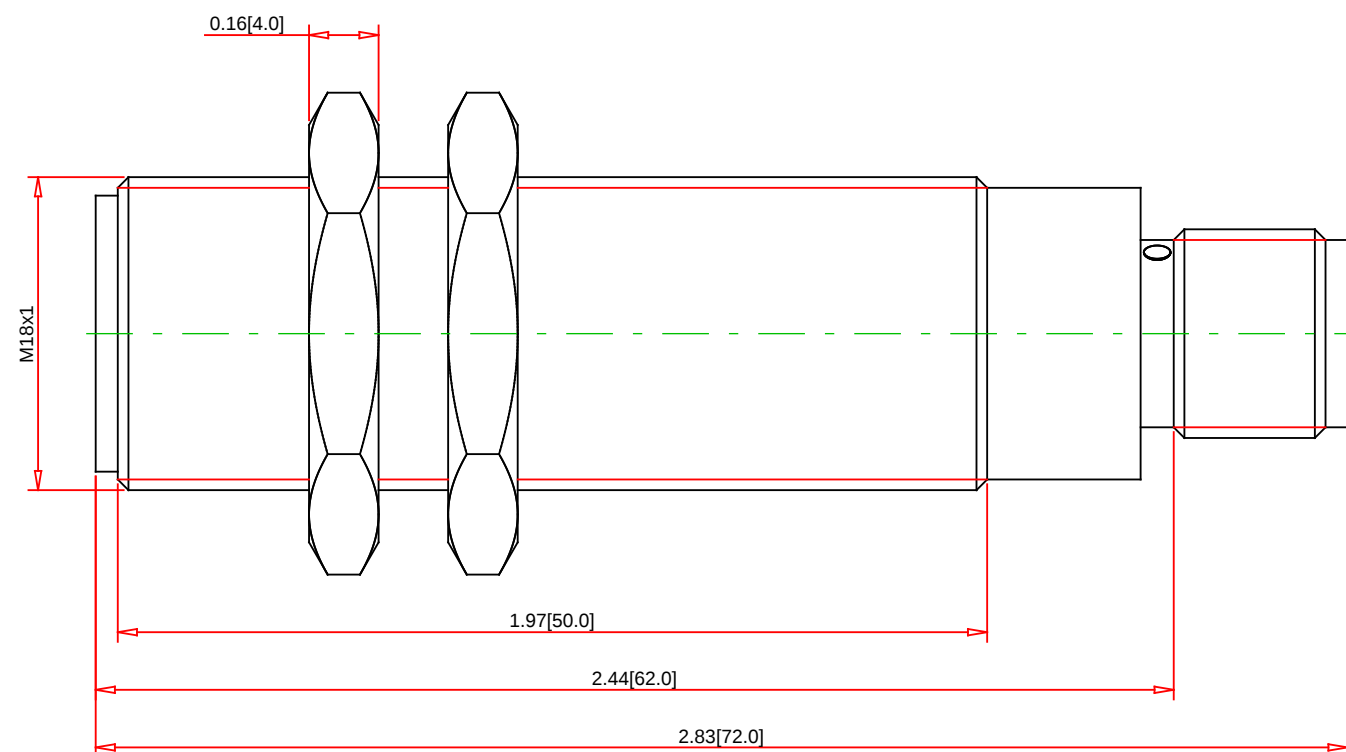

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
XU9M18MA230K

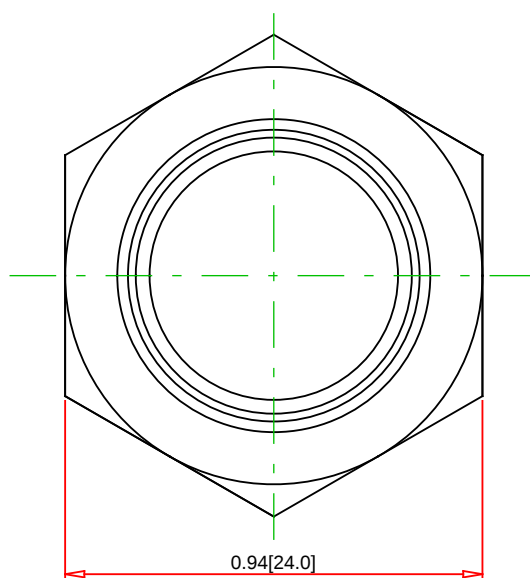

Telemecanique
Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Diffuse with Background Suppression:
Diffuse:
Polarized Retroreflective:
Thru Beam:
Retroreflective:
Circuit Type:
Output Mode:
Power:
Voltage Range:
Max Load:
Max Switching Frequency :
Temp Range:
NEMA Type:
IP Rating:
Standards:

Dark Operate
AC/DC
24-240
200 mA
25 Hz
-25° to 55° C (-13° to 131° F)
4X (indoor use only)
67
UL, CE Rohs

Specification:

Sensor Type:
Description:
Body Style:
Diameter:
Housing Material:
Face Material:
Adjustment:
Cable Size:
Connector Type:
Special Features:

Transparent Material Detection - Polarized Retroreflective
Photoelectric, Transparent Material Detection - Polarized Retroreflective, 18 mm Barrel, 24-240
Barrel
mm
Metal - NPB
PMMA
Yes
3-pin U20