



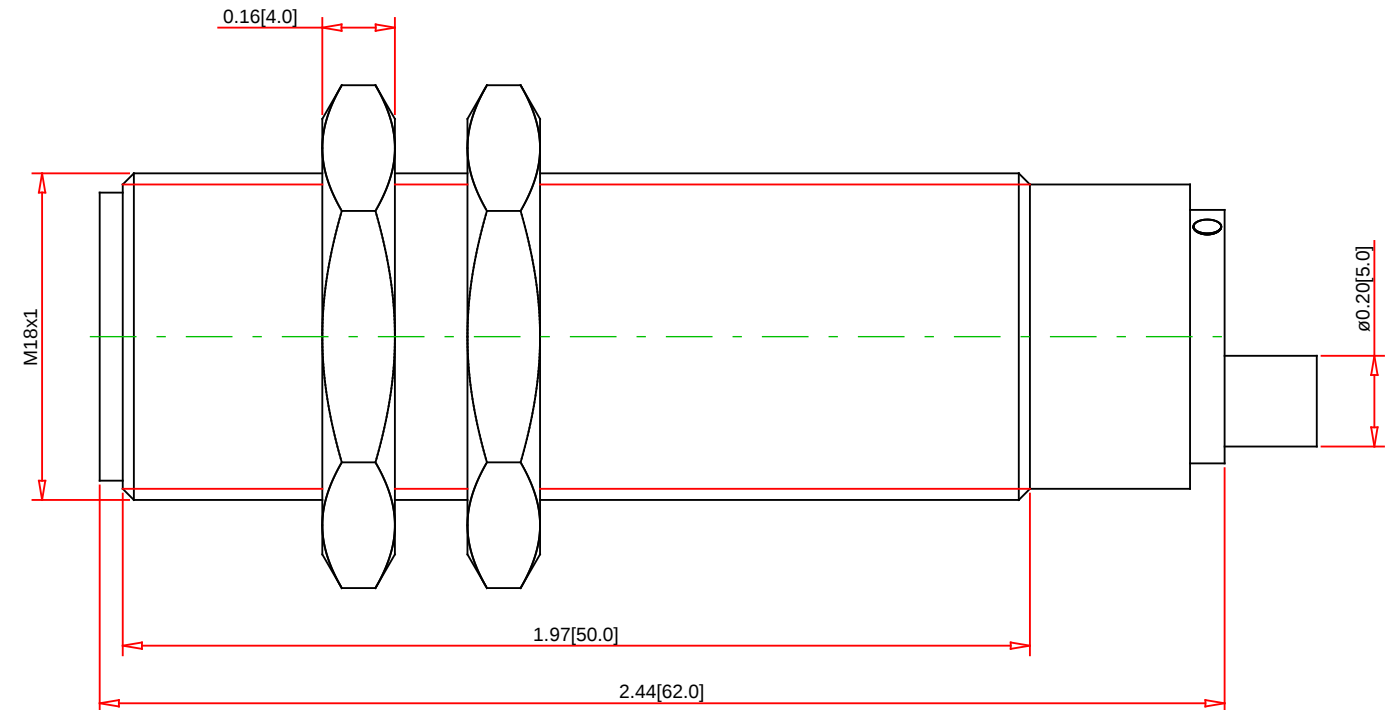

Note:  
- Drawings Not To Scale  
- Drawings Subject to Change Without Notice  
- Dimensions are inches next to [Millimeters]

Part No.:

XU9M18MB230

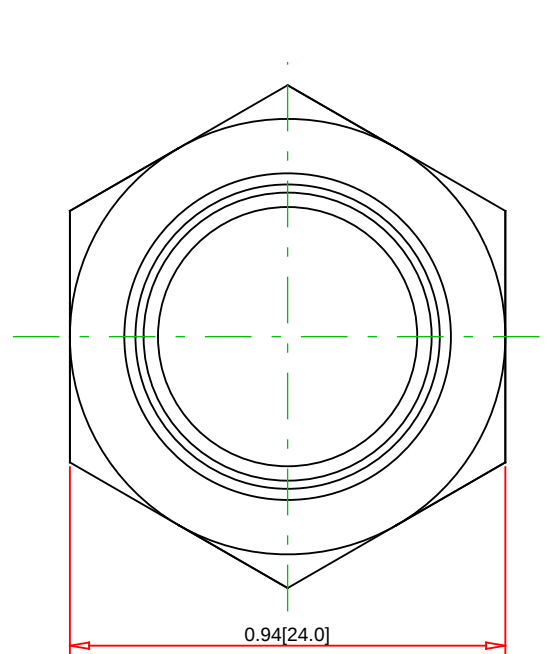

Telemecanique  
Sensors

Telemecanique Sensors  
1875 Founders Drive  
Dayton, OH 45420-4017  
Customer Care Center : 1-800-435-2121  
Web : [www.tesensors.com](http://www.tesensors.com)

Technical Information:

Diffuse with Background Suppression:

Diffuse:

Polarized Retroreflective:

Thru Beam:

Retroreflective:

Circuit Type:

Output Mode:

Power:

Voltage Range:

Max Load:

Max Switching Frequency :

Temp Range:

NEMA Type:

IP Rating:

Standards:

Light Operate

AC/DC

24-240

200 mA

25 Hz

-25° to 55° C (-13° to 131° F)

4X (indoor use only)

67

UL, CE Rohs

Specification:

Sensor Type:

Description:

Body Style:

Diameter:

Housing Material:

Face Material:

Adjustment:

Cable Size:

Connector Type:

Special Features:

Transparent Material Detection - Polarized Retroreflective

Photoelectric, Transparent Material Detection - Polarized Retroreflective, 18 mm Barrel, 24-240

Barrel

mm

Metal - NPB

PMMA

Yes

2.0 m (6.6 ft)