


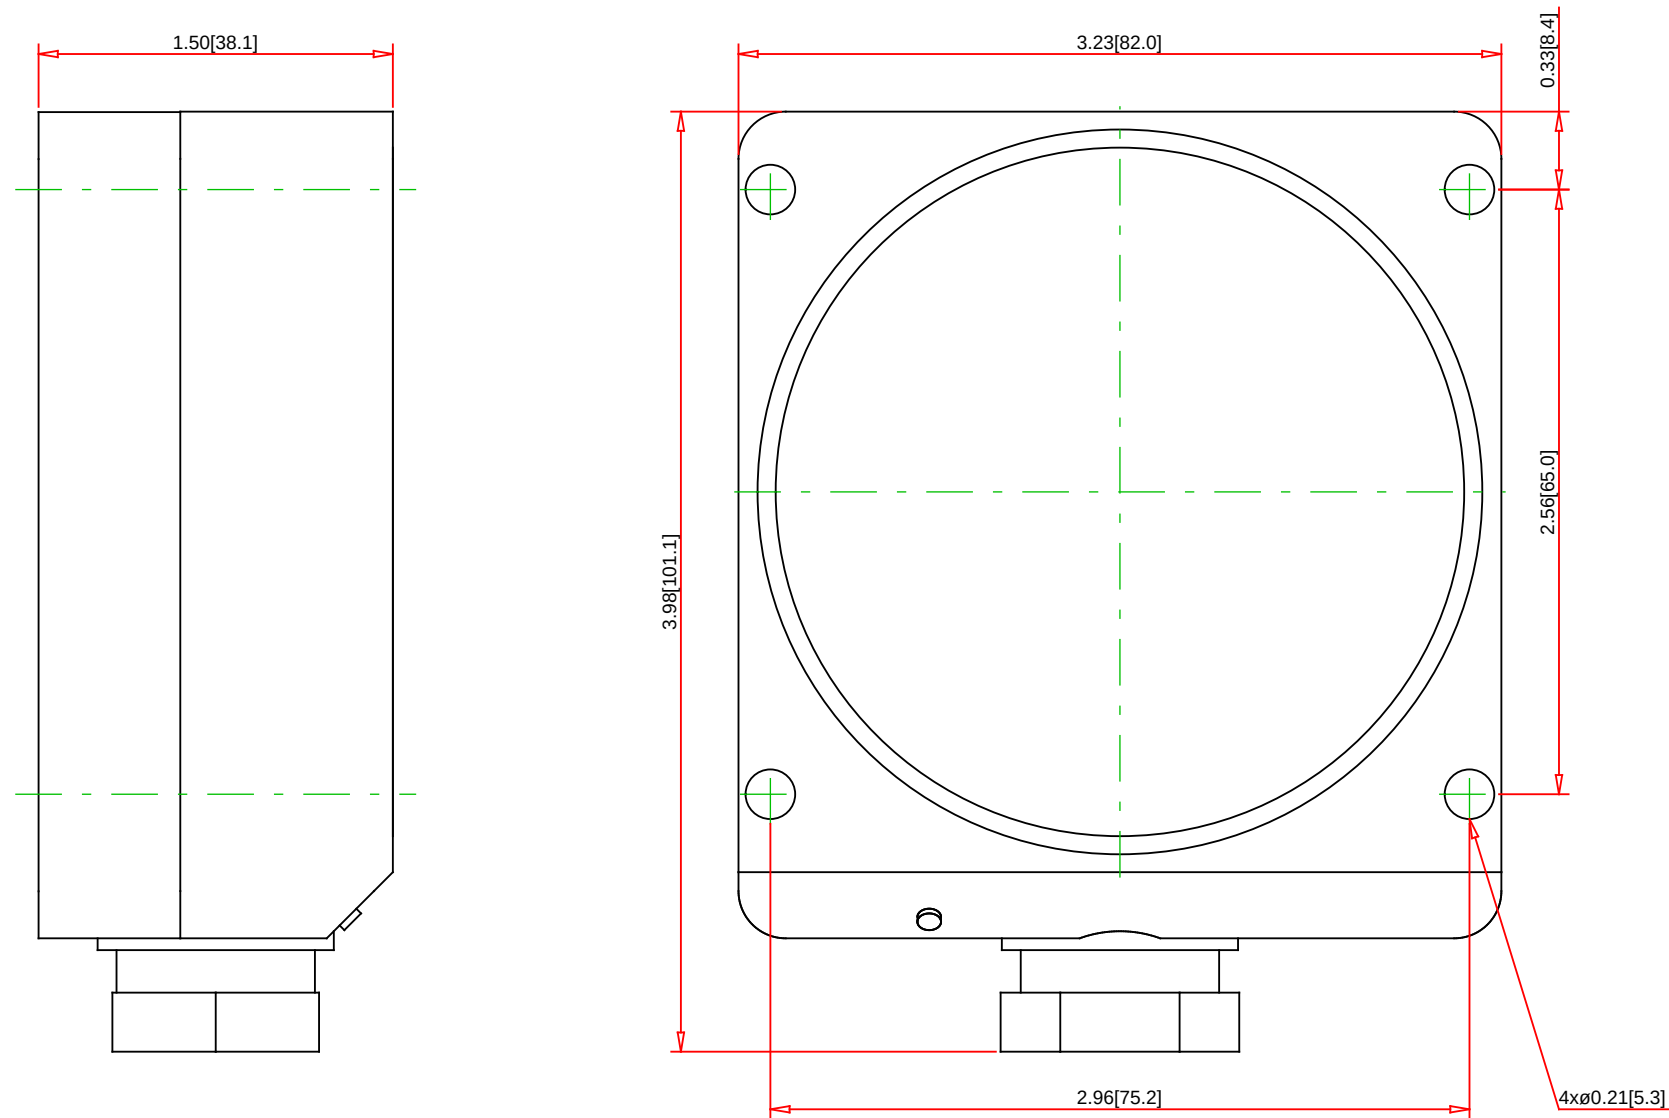

Note: - Drawings Not To Scale - Drawings Subject to Change Without Notice - Dimensions are inches next to [Millimeters]		Part No.: XSDH607339		Telemecanique Sensors Telemecanique Sensors 1875 Founders Drive Dayton, OH 45420-4017 Customer Care Center : 1-800-435-2121 Web : www.tesensors.com	
Technical Information: Detecting Distance: Circuit Type: Output Mode: Volts Type: Voltage Range: Max Load: Shielding: Max Switching Frequency: Temp Range: NEMA Type: IP Rating: Standards: 30.0 - 60.0 mm (1.17 - 2.34 in) 4 wire NO/NC DC 12-48 VDC 200 mA Non shielded 50 Hz -25° to 70° C (-13° to 158° F) 4X (indoor use only) IP67 UL, CE Rohs				Specification: Sensor Type: Description: Body Style: Diameter: Housing Material: Cable Size: Connector Type: Special Features: Inductive Proximity Sensor, Inductive, Flat Profile, 12-48 VDC, Non shielded Flat Profile Thermoplastic Polyester 2.0 m (6.6 ft)	