
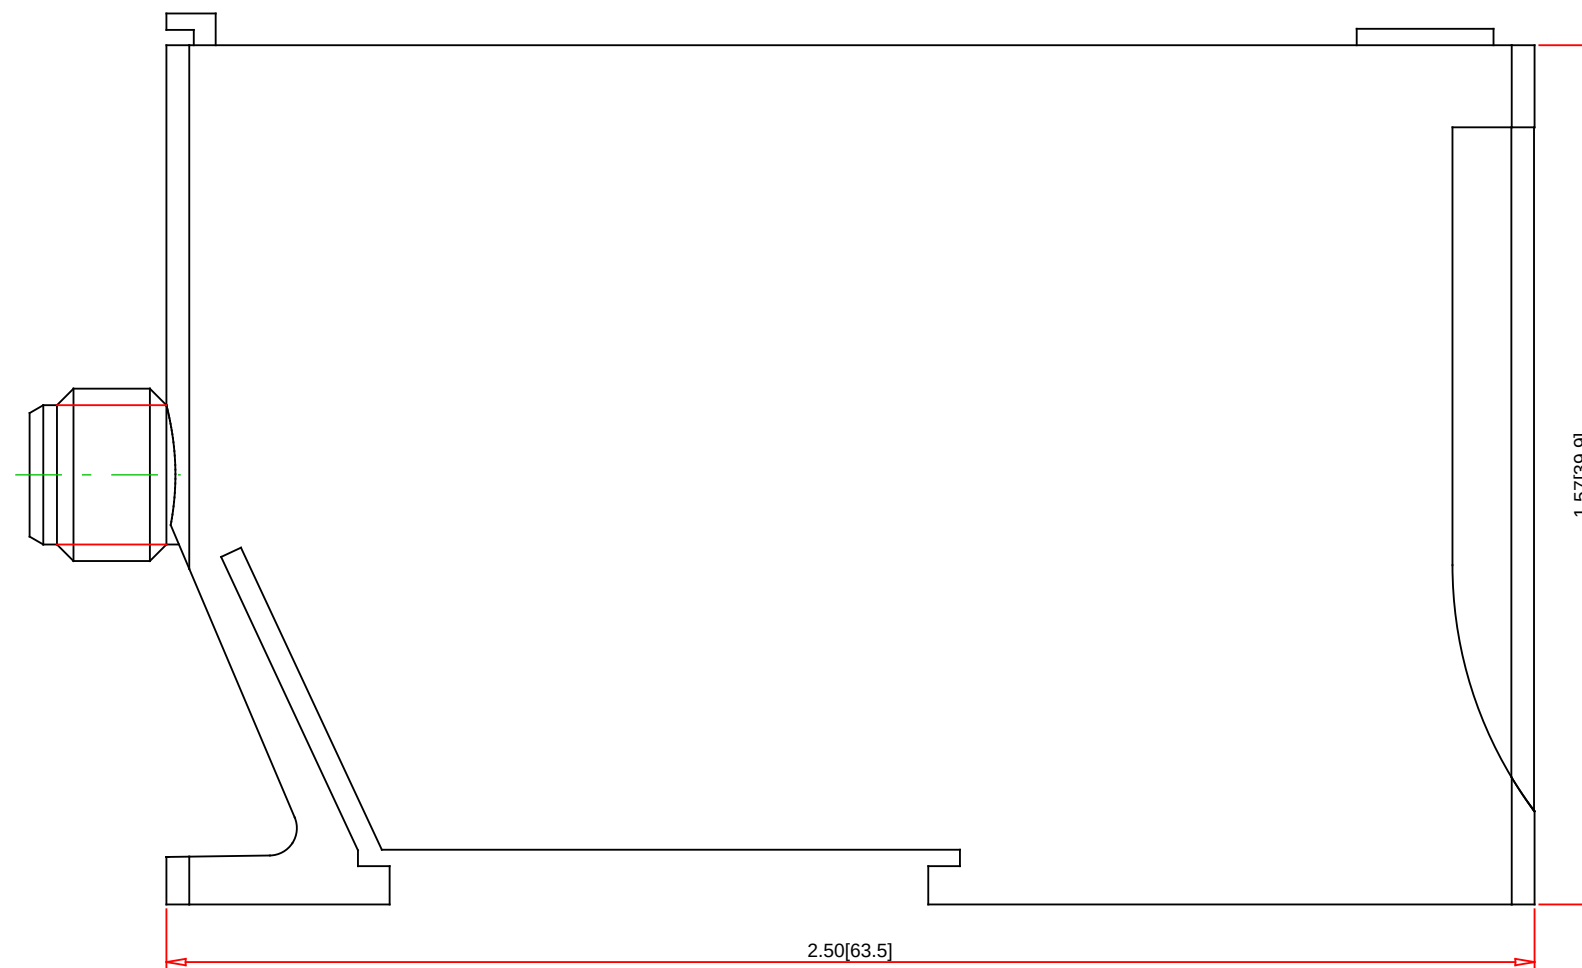


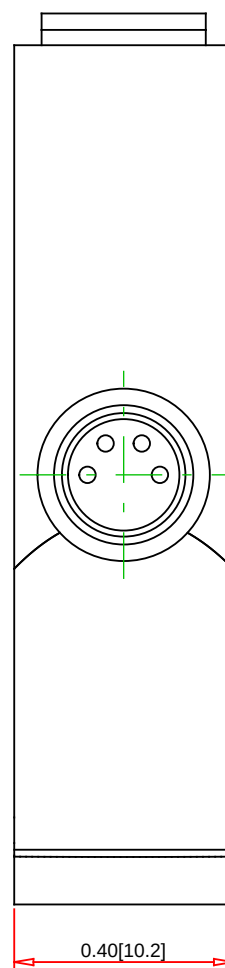

Note: - Drawings Not To Scale - Drawings Subject to Change Without Notice - Dimensions are inches next to [Millimeters]	Part No.: XUDA2PSMM8	Telemecanique Sensors Telemecanique Sensors 1875 Founders Drive Dayton, OH 45420-4017 Customer Care Center : 1-800-435-2121 Web : www.tesensors.com
Technical Information: Diffuse with Background Suppression: Diffuse: Polarized Retroreflective: Thru Beam: Retroreflective: Circuit Type: Output Mode: Power: Voltage Range: Max Load: Max Switching Frequency : Temp Range: NEMA Type: IP Rating: Standards: PNP Light/Dark Operate DC 12-24 VDC 100 mA 1000 or 5000 Hz -10° to 55° C (13° to 131° F) 4X (indoor use only) 65 UL, CE Rohs		Specification: Sensor Type: Description: Body Style: Diameter: Housing Material: Face Material: Adjustment: Cable Size: Connector Type: Special Features: Fiber Amplifier Photoelectric, Fiber Amplifier, DIN-rail, 12-24 VDC DIN-rail Plastic - PBT PMMA Pushbutton fine teach 4-pin M8 Hinged cover