
Level Sensors Conductive Types VH1, VH2, A94-10



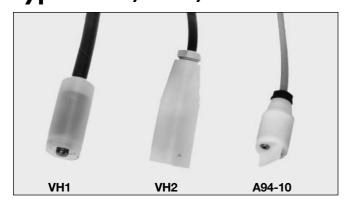

- VH1 and VH2: Hanging electrodes with Neoprene cable
- A94-10: Hanging probe for (swimming) pool level control

Product Description

The sensors VH1 and VH2 are hanging electrodes with Neoprene cables. The sensor A94-10 is a hanging probe for

(swimming) pool level control. For use with amplifier (please refer to separate data sheets).

Ordering Key

Туре

,

VH 1

Type Selection

| Electrode isolation | Ordering no. 1 electrode | Ordering no. 2 electrodes |
|---------------------|-----------------------------|------------------------------|
| No Yes | VH 1 VH 2 | A 94-10 |

Specifications

| Electrodes | | |
|-----------------------|---|--|
| Isolation | | |
| VH2 | Nylon 6 | |
| Material | Stainless steel | |
| Housing | | |
| Material | | |
| VH1, VH2 | Nylon 6 | |
| A94-10 | Polyester | |
| Dimensions | | |
| VH1 | Ø 18 x 36,5 mm | |
| VH2 | Ø 32 x 75,5 mm | |
| A94-10 | Ø 22 x 75,0 mm | |
| Connection | | |
| VH1, VH2 | Cable (Neoprene), | |
| | 5 m, 1 x 2.5 mm ² | |
| A94-10 | Cable (PVC), 5 m, 2 x 0.5 mm ² | |
| Environment | | |
| Degree of protection | IP 67 | |
| Operating temperature | | |
| VH1, VH2 | 0° to +90°C (+32° to +194°F) | |
| A94-10 | 0° to +60°C (+32° to +140° F) | |
| Storage temperature | -25° to +100°C (-13° to +212°F) | |
| | | |
| | | |
| | | |
| | | |
| | | |

Dimensions

