

ICB, M30 short or long body versions



Proximity inductive sensors, extended range, nickel-plated brass housing



Description

A family of inductive proximity switches in industrial standard nickel-plated brass housings. They are able to handle applications where high sensing range is requested. Output is open collector NPN or PNP transistors.

Benefits

- Sensing distance: 15 to 22 mm
- Flush or non-flush types
- Short or long body versions
- Rated operational voltage (U_b): 10 - 36 VDC
- Output: DC 200 mA, NPN or PNP
- Normally open or Normally closed
- LED indication for output ON, short-circuit and overload
- Protection: reverse polarity, short circuit, transients
- Cable or M12 plug versions
- According to IEC 60947-5-2
- Laser engraved on front cap, permanently legible
- CSA certified for Hazardous Locations

References

Order code



ICB30



Enter the code entering the corresponding option instead of ☐

Code	Option	Description
ICB	-	Proximity inductive sensors, nickel-plated brass housing
30	-	Housing size
☐	S	Housing length: short
☐	L	Housing length: long
☐	30	Thread length: 30mm
☐	50	Thread length: 50mm
☐	F	Detection principle: flush mounting
☐	N	Detection principle: non-flush mounting
☐	15	Sensing distance: 15mm
☐	22	Sensing distance: 22mm
☐	N	Output type: NPN
☐	P	Output type: PNP
☐	O	Output configuration: normally open
☐	C	Output configuration: normally closed
☐		Connection: cable
☐	M1	Connection: plug

Selection guide

Con- nec- tion	Body style	Rated operating distance S _n	Ordering no. NPN, Normally open	Ordering no. PNP, Normally open	Ordering no. NPN, Normally closed	Ordering no. PNP, Normally closed
Cable	Short	15 mm ¹⁾	ICB30S30F15NO	ICB30S30F15PO	ICB30S30F15NC	ICB30S30F15PC
Cable	Short	22 mm ²⁾	ICB30S30N22NO	ICB30S30N22PO	ICB30S30N22NC	ICB30S30N22PC
Plug	Short	15 mm ¹⁾	ICB30S30F15NOM1	ICB30S30F15POM1	ICB30S30F15NCM1	ICB30S30F15PCM1
Plug	Short	22 mm ²⁾	ICB30S30N22NOM1	ICB30S30N22POM1	ICB30S30N22NCM1	ICB30S30N22PCM1
Cable	Long	15 mm ¹⁾	ICB30L50F15NO	ICB30L50F15PO	ICB30L50F15NC	ICB30L50F15PC
Cable	Long	22 mm ²⁾	ICB30L50N22NO	ICB30L50N22PO	ICB30L50N22NC	ICB30L50N22PC
Plug	Long	15 mm ¹⁾	ICB30L50F15NOM1	ICB30L50F15POM1	ICB30L50F15NCM1	ICB30L50F15PCM1
Plug	Long	22 mm ²⁾	ICB30L50N22NOM1	ICB30L50N22POM1	ICB30L50N22NCM1	ICB30L50N22PCM1

¹⁾ For flush mounting in metal

²⁾ For non-flush mounting in metal

Sensing

Detection

Assured operating sensing distance (S _a)	$0 \leq S_a \leq 0.81 \times S_n$
Effective operating distance (S _r)	$0.9 \times S_n \leq S_r \leq 1.1 \times S_n$
Usable operating distance (S _u)	$0.85 \times S_r \leq S_u \leq 1.1 \times S_r$
Differential travel (H) (Hysteresis)	1 to 20% of sensing dist.

Correction factors

The specific operating distance S_n refers to defined measuring conditions. The following data have to be considered as general guidelines.

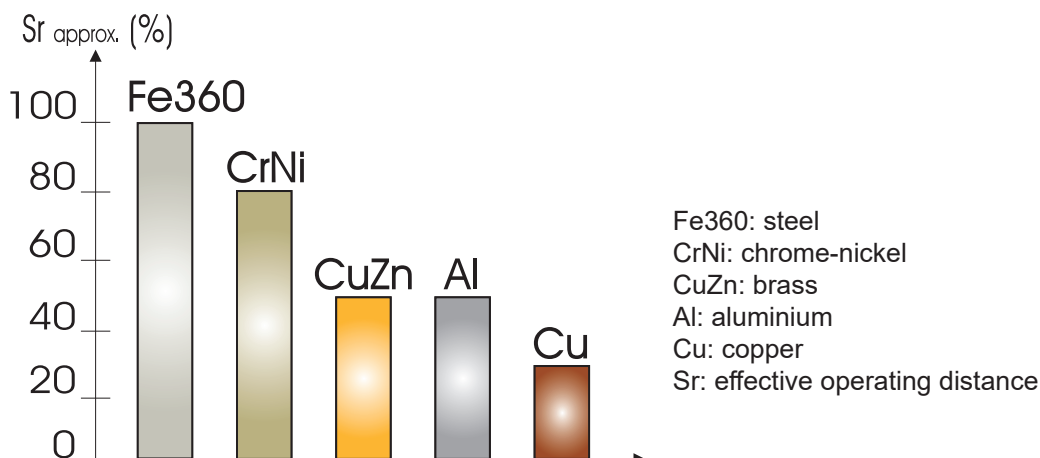


Fig. 1 The rated operating distance is reduced by the use of metals and alloys other than Fe360. The most important reduction factors for inductive proximity sensors are shown in the figure.

Accuracy

Repeat accuracy (R)	≤ 5%
---------------------	------

Features

Power Supply

Rated operational voltage (U_b)	10 to 36 VDC (ripple incl.)
Ripple (U_{rip})	≤ 10%
No load supply current (I_o)	≤ 15 mA
Power ON delay (t_v)	≤ 300 ms

Outputs

Output current (I_o)	≤ 200 mA @ 50°C (≤ 150 mA @ 50-70°C)
OFF-state current (I_o)	≤ 50 µA
Voltage drop (U_d)	Max. 2.5 VDC @ 200 mA
Protection	Reverse polarity, short-circuit, transients
Voltage transient	1 kV/0.5 J

Response times

Max. operating frequency (f)	≤ 1000 Hz
------------------------------	-----------

Indication

Indication for output ON NO version NC version	Activated LED, yellow Target present Target not present
Indication for short circuit/ overload	LED blinking (f = 2 Hz)

Environmental

Ambient temperature Operating	Cable: -25° to +70°C (-13° to +158°F) Plug: -40° to +70°C (-40° to +158°F)
Storage	-40° to +80°C (-40° to +176°F)
Shock and vibration	IEC 60947-5-2/7.4
Degree of protection	IP67

Compatibility and conformity

EMC protection - According to IEC 60947-5-2	
Electrostatic discharge (ESD)	IEC 61000-4-2 8 kV air discharge, 4 kV contact discharge
Radiated radio frequency	IEC 61000-4-3 12 V/m
Burst immunity	IEC 61000-4-4 4 kV
Conducted radio frequency	IEC 61000-4-6 10 V
Power frequency magnetic fields	IEC 61000-4-8 30 A/m
MTTF _d	850 years @ 50°C (122°F)
Approvals	  
	CCC is not required for products rated ≤ 36 V

Mechanical data

Weight (cable/nuts included)	
ICB30 S	Max. 185 g
ICB30 L	Max. 195 g
Mounting	Flush or non flush mountable
Material	Body: nickel-plated brass Front: grey thermoplastic polyester
Tightening torque	25 Nm

Electrical connection

Cable	Ø 5.2 x 2 m, 3 x 0.34 mm ² , grey PVC, oil proof
Plug	M12 x 1

Connection Diagrams

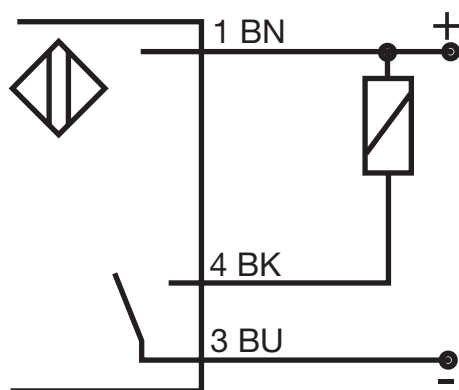


Fig. 2 NPN - Normally open

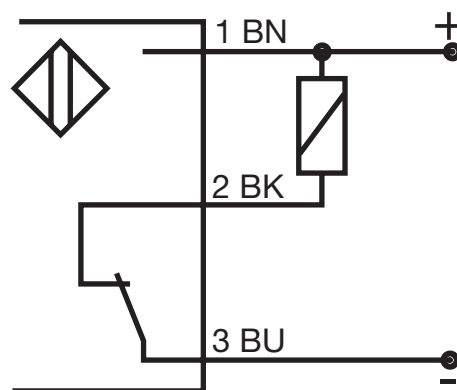


Fig. 3 NPN - Normally closed

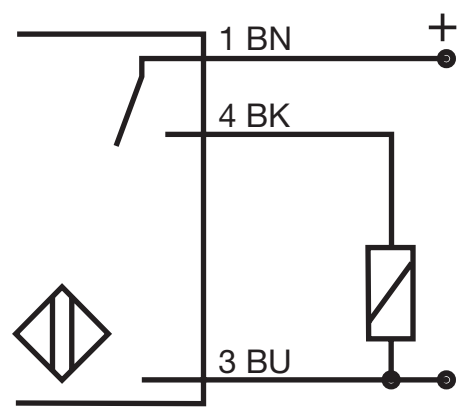


Fig. 4 PNP - Normally open

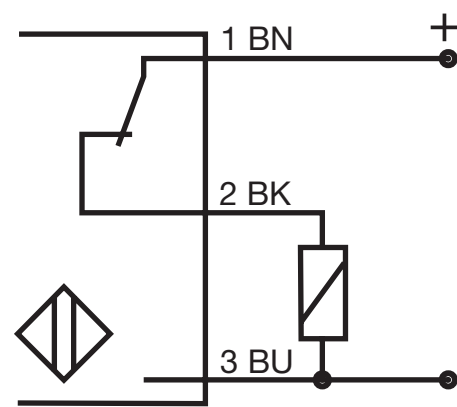


Fig. 5 PNP - Normally closed

Colour code		
BN: brown	BK: black	BU: blue

Dimensions [mm]

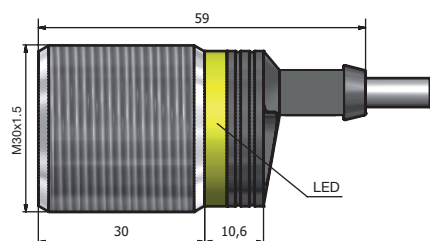


Fig. 6 Short body, flush version, cable

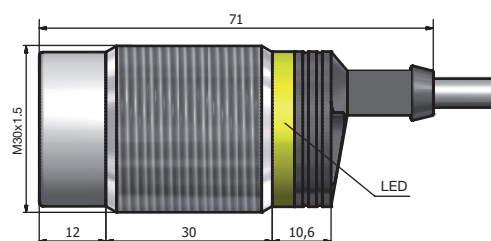


Fig. 7 Short body, non-flush version, cable

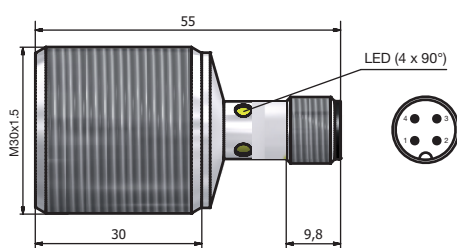


Fig. 8 Short body, flush version, plug

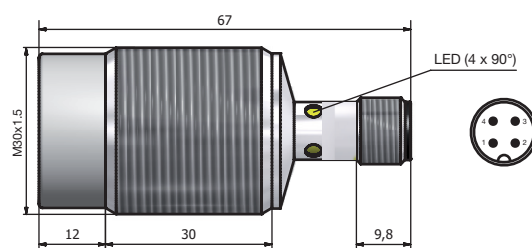


Fig. 9 Short body, non-flush version, plug

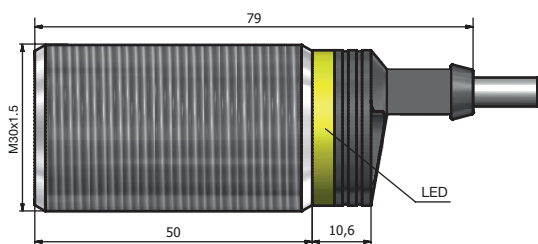


Fig. 10 Long body, flush version, cable

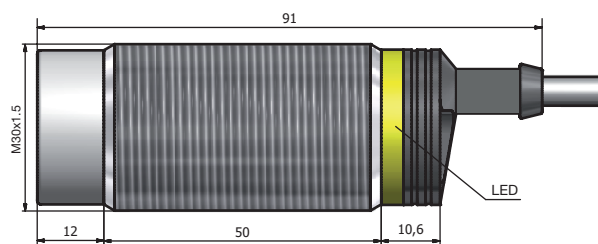


Fig. 11 Long body, non-flush version, cable

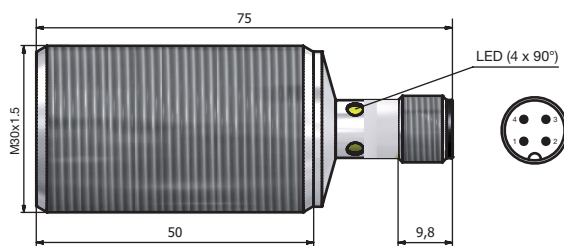


Fig. 12 Long body, flush version, plug

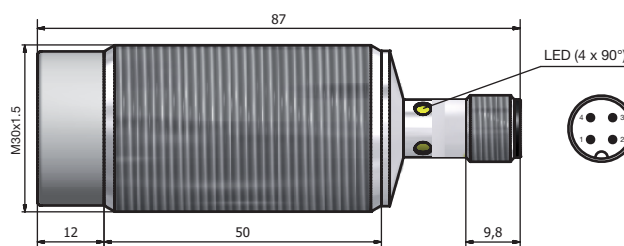


Fig. 13 Long body, non-flush version, plug

Installation

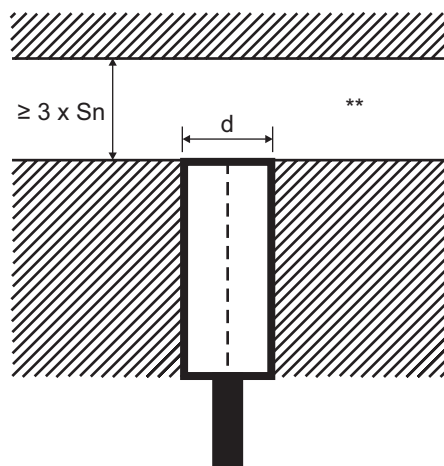


Fig. 14 Flush sensor, when installed in damping material

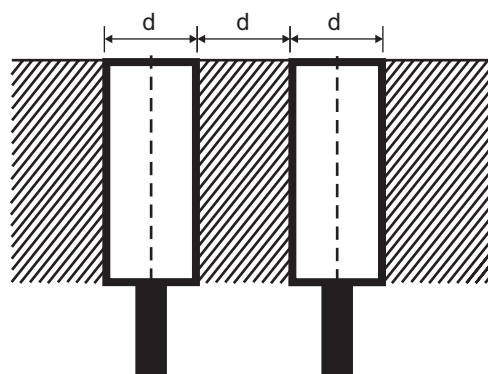


Fig. 15 Flush sensors, when installed together in damping material

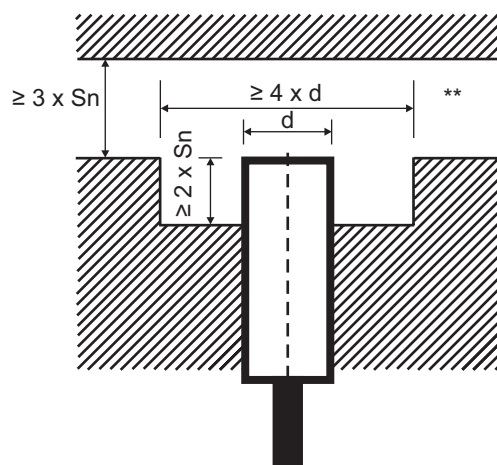


Fig. 16 Non-flush sensor, when installed in damping material

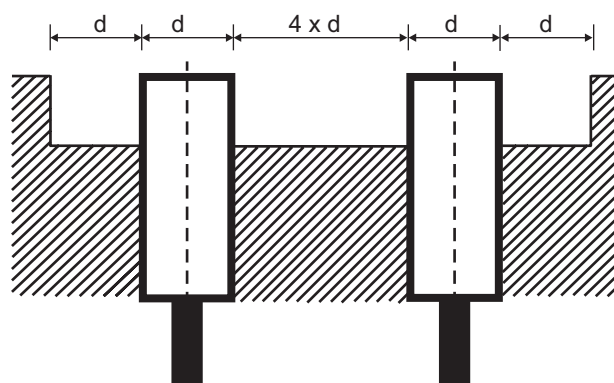


Fig. 17 Non-flush sensors, when installed together in damping material

** Free zone or non-damping material

S_n : nominal sensing distance

d: sensor diameter: 30 mm

Sensors installed opposite each other

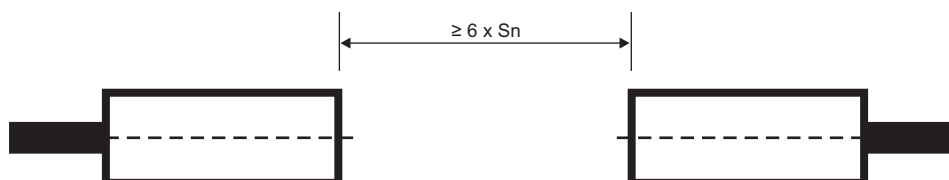


Fig. 18 For sensors installed opposite each other, a minimum space of $6 \times S_n$ (the nominal sensing distance) must be observed

Delivery contents and compatible components

Delivery contents


- Inductive proximity switch
- 2 nuts
- Packaging: plastic bag

CARLO GAVAZZI compatible components

Accessories for plug versions

	PVC	PUR
3-wire angled connector, 2 m cable	CONB13NF-A2	CONB13NF-A2P
3-wire angled connector, 5 m cable	CONB13NF-A5	CONB13NF-A5P
3-wire angled connector, 10 m cable	CONB13NF-A10	CONB13NF-A10P
3-wire angled connector, 15 m cable	CONB13NF-A15	CONB13NF-A15P
3-wire straight connector, 2 m cable	CONB13NF-S2	CONB13NF-S2P
3-wire straight connector, 5 m cable	CONB13NF-S5	CONB13NF-S5P
3-wire straight connector, 10 m cable	CONB13NF-S10	CONB13NF-S10P
3-wire straight connector, 15 m cable	CONB13NF-S15	CONB13NF-S15P

For any additional information or different options, please refer to the "General Accessories - Connector Cables -Type CONB1..." datasheets.



COPYRIGHT ©2019

Content subject to change. Download the PDF: www.productselection.net