

Flow sensor for liquid media type 210

Flow range
0.5 ... 150 l/min

Nominal diameters
DN 6 / 8 / 10 / 15 / 20 / 25

Temperature measurement
-40 ... +125 °C



In comparison to the OEM flow sensor (type 200), the type 210 is available with an increased range of power supply and output signals all with and without temperature measurement. With no moving parts the flow sensor is not sensitive to debris, has marginal pressure loss and high accuracy.

- Flow measuring with voltage, current or frequency output
- Temperature non-sensitive measuring principle
- Excellent media resistance (measuring element not in contact with the media)
- CE conformity
- Wide application temperature range
- Marginal loss of pressure
- Measuring element not sensitive to debris
- Direct temperature measurement in the medium
- Drinking water approval KTW, W270, WRAS

Technical overview

Flow measurement

Measuring principle	Vortex	Piezoelectric sensor element
Measuring range		0.5 ... 150 l/min
Nominal diameters		DN 6 / 8 / 10 / 15 / 20 / 25
Accuracy at < 50% fs (water)		< 1% fs
Accuracy at > 50% fs (water)		< 2% measuring value
Response time	Immediately	Signal delay
	Therefore suitable for spigot use.	Response time
	Frequency output	< 100 ms
	Analogue output	< 5 ms
		Signal delay
		< 2 s
		Response time
		< 500 ms

Temperature measurement (> 8 DN - DN 6 on request)

Measuring principle	Resistance	PT1000
Measuring range		-40 ... +125 °C
PT1000	Accuracy	class B DIN EN 60751
		@ T = 0 °C
		@ T ≠ 0 °C
		± 0.3 K
		± 0.3 K ± 0.005 * T
	Measuring range	-25 ... +125 °C
	Accuracy	± 0.5 K ± 0.005 * T
0 ... 10 V	Calculation temperature	T (°C) = $\frac{+150 \text{ °C}}{10 \text{ V}} * U_{\text{OUT-T}} - 25 \text{ °C}$
Temperature influences	Self-heating at temperature sensor	1 K/mW
	Conduction resistance to connector	0.8 Ohm

Operating conditions

Medium	Suitable for heating circuit water with the usual additives	Other medium on request
	Drinking water	
Temperature	Media	< +125 °C
	Ambient	-15 ... +85 °C
	Storage	-30 ... +85 °C
	(for lifetime)	12 bar at +40 °C
	(for lifetime)	6 bar at +100 °C
Max. pressure and medium temperature	(for 600 hours)	4 bar at +125 °C
	(for 2 hours)	4 bar at +140 °C
	(max. test pressure)	18 bar at +40 °C
Cavitation	The following equation is valid to prevent cavitation:	$P_{\text{abs outlet}} / P_{\text{difference}} > 5.5$

Materials in contact with medium (FDA-konform)

Sensor paddle	ETFE
Case with damming body	PA6T/6I (40% GF)
Sealing material	EPDM (perox.)

Electrical overview

Power supply	U_{IN}	Frequency output	4.75 ... 33 VDC	Voltage output	11.5 ... 33 VDC	Current output	8 ... 33 VDC
Output	Frequency square pulse signal $U_{\text{OUT-Q frequency}}$		< 0.5 ... > $U_{\text{IN}} - 0.5 \text{ V}$		–		–
Flow (Q)	Analogue signal	$U_{\text{OUT-Q}}$ oder I_{OUT}	–		0 ... 10 V		4 ... 20 mA
Output	Resistant signal	$R_{\text{OUT-PT1000}}$		PT1000 class B DIN EN 60751			
temperature (T)	Voltage signal	$U_{\text{OUT-T}}$		0 ... 10 V			–
Electrical connection and protection class			M12x1 (IP 65)	M12x1 (IP 65)			M12x1 (IP 65)
Load against GND or IN			< 1 mA / < 100 nF	< 6 mA / < 100 nF ¹⁾			< ($U_{\text{IN}} - 8 \text{ V}$) / 20 mA
Current consumption load free (I_{IN})			< 2mA	< 5 mA			–

Weight

DN 6 / 8	~ 47 g
DN 10	~ 57 g
DN 15	~ 68 g
DN 20	~ 92 g
DN 25	~ 100 g

Test / Admissions

Drinking water approval	KTW / W270 / WRAS
Electromagnetic compatibility	CE conformity acc. to EN 61326-2-3

Packaging (multiple packaging)	Connection copper tube	Outside thread K	Outside thread G
DN 6	–	Blister 30x	Blister 30x
DN 8 / 10	Blister 30x	Blister 30x	Blister 30x
DN 15	Blister 30x	Blister 30x	Blister 20x
DN 20	Blister 20x	Blister 20x	Blister 15x
DN25	–	Blister 15x	Blister 15x

¹⁾ against GND only


²⁾ incl. 3xDi inlet and outlet side

³⁾ Pv in Pa; Q in l/min

Nominal diameters dependent variables

Nominal diameters	Connection	Measuring range	Quantity per puls	Flow range	Characteristic line frequency output	Frequency range	Characteristic line voltage output	Characteristic line current output	Pressure drop ^{1), 2)}
DN 6	Outside thread small	0.5 ... 10 l/min	0.386 ml	0.074 ... 1.474 m/s	0.0238 * f - 0.14	28 ... 427 Hz	Q = 1.0 * U _{OUT,Q}	Q = 0.625 * (I - 4 mA)	240 * Q ²
	Outside thread heavy								
DN 8	Outside thread small	0.9 ... 15 l/min	0.638 ml	0.133 ... 2.210 m/s	0.0398 * f - 0.3	30 ... 384 Hz	Q = 1.5 * U _{OUT,Q}	Q = 0.938 * (I - 4 mA)	85.00 * Q ²
	Outside thread heavy		0.631 ml		0.0394 * f - 0.3	30 ... 388 Hz			
	Connection copper tube		0.614 ml		0.0383 * f - 0.3	31 ... 399 Hz			
DN 10	Outside thread small	1.8 ... 32 l/min	1.399 ml	0.265 ... 4.716 m/s	0.0850 * f - 0.2	24 ... 379 Hz	Q = 3.2 * U _{OUT,Q}	Q = 2.000 * (I - 4 mA)	22.50 * Q ²
	Outside thread heavy		1.370 ml		0.0832 * f - 0.2	24 ... 387 Hz			
	Connection copper tube		1.384 ml		0.0841 * f - 0.2	24 ... 383 Hz			
DN 10	Outside thread small	2.0 ... 40 l/min	1.403 ml	0.295 ... 5.895 m/s	0.0850 * f - 0.2	26 ... 473 Hz	Q = 4.0 * U _{OUT,Q}	Q = 2.500 * (I - 4 mA)	22.50 * Q ²
	Outside thread heavy		1.373 ml		0.0832 * f - 0.2	26 ... 483 Hz			
	Connection copper tube		1.388 ml		0.0841 * f - 0.2	26 ... 478 Hz			
DN 15	Outside thread small	3.5 ... 50 l/min	3.047 ml	0.290 ... 4.145 m/s	0.1843 * f - 0.2	20 ... 272 Hz	Q = 5.0 * U _{OUT,Q}	Q = 3.125 * (I - 4 mA)	6.70 * Q ²
	Outside thread heavy		3.016 ml		0.1824 * f - 0.2	20 ... 275 Hz			
	Connection copper tube		3.077 ml		0.1861 * f - 0.2	20 ... 270 Hz			
DN 20	Outside thread small	5.0 ... 85 l/min	6.213 ml	0.265 ... 4.509 m/s	0.3754 * f - 0.3	14 ... 227 Hz	Q = 8.5 * U _{OUT,Q}	Q = 5.313 * (I - 4 mA)	2.50 * Q ²
	Outside thread heavy		6.125 ml		0.3701 * f - 0.3	14 ... 230 Hz			
	Connection copper tube		6.208 ml		0.3751 * f - 0.3	14 ... 227 Hz			
DN 25	Outside thread small	9.0 ... 150 l/min	12.412 ml	0.283 ... 4.709 m/s	0.7467 * f - 0.2	12 ... 201 Hz	Q = 15 * U _{OUT,Q}	Q = 9.375 * (I - 4 mA)	0.92 * Q ²
	Outside thread heavy		12.251 ml		0.7370 * f - 0.2	12 ... 204 Hz			

Minimum life span on high flow rate and high temperature

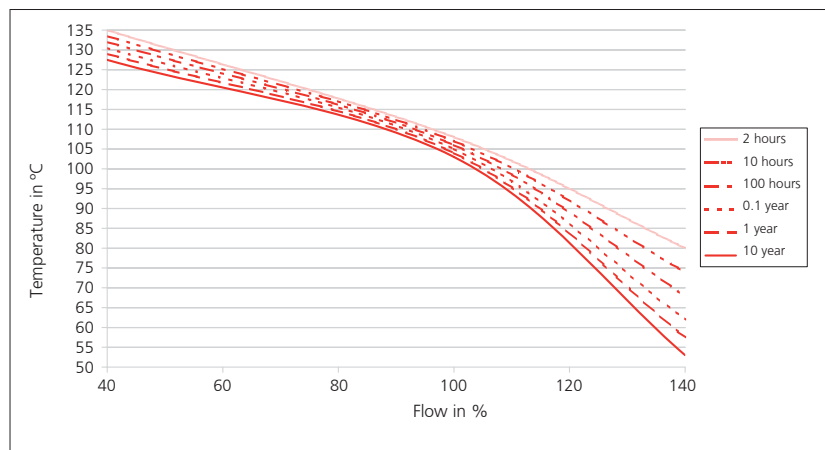

¹⁾ incl. 3xDi inlet and outlet side

²⁾ Pv in Pa; Q in l/min

Order code selection table				210.	X	X	X	X	X	X	X
Version	Flow			9							
	Flow and temperature (PT1000)			8							
	Flow and temperature (0 ... 10 V)			6							
Nominal diameters and flow range	DN 6	0.5 ... 10 l/min.	(with temperature on request)	9	0	6					K,G
	DN 8	0.9 ... 15 l/min.			0	8					
	DN 10	1.8 ... 32 l/min.			1	0					
	DN 10	2.0 ... 40 l/min.			1	1					
	DN 15	3.5 ... 50 l/min.			1	5					
	DN 20	5.0 ... 85 l/min.			2	0					
	DN 25	9.0 ... 150 l/min.			2	5					K,G
Output / power supply	Frequency output (Square pulse signal) 4.75 ... 33 VDC			8,9			2				
	Analogue signal 0 ... 10 V 11.5 ... 33 VDC						3				
	Analogue signal 4 ... 20 mA 8 ... 33 VDC			8,9			4				
Electrical connection	Connector M12x1 2- or 3-pole (condensation protection)			9				4			
	Connector M12x1 4- or 5-pole (condensation protection)			8,6				5			
Sealing material	EPDM Ethylene propylene rubber (peroxidically cross-linked)									1	
Tube connection	Plastic PA6T / 6I connection copper tube (max. DN 20)										N
	Plastic PA6T / 6I outside thread K (see dimension diagram)										K
	Plastic PA6T / 6I outside thread G (see dimension diagram)										G


Accessories ¹⁾

				Order number
Connection kit ²⁾ DN 8, 10 with copper tube				113775
Connection kit ²⁾ DN 8, 10 with adapter Rp ¾ Stainless steel 1.4305/AISI 303				113776
Connection kit ²⁾ DN 15 with copper tube				113777
Connection kit ²⁾ DN 15 with adapter Rp ½ Stainless steel 1.4305/AISI 303				113778
Connection kit ²⁾ DN 20 with copper tube				113779
Connection kit ²⁾ DN 20 with adapter Rp ¾ Stainless steel 1.4305/AISI 303				113780
Straight-wire box for connector M12x1 with cable		3-pole 200 cm		114605
Corner-wire box for connector M12x1 with cable		3-pole 200 cm		114604
Straight-wire box for connector M12x1 with cable		5-pole 200 cm (with temperature)		114564
Corner-wire box for connector M12x1 with cable		5-pole 200 cm (with temperature)		114563
Straight-wire box for connector M12x1 screwing terminal		5-pole		115024
Clip for DN 8,10				112116
Clip for DN 15				110941
Clip for DN 20				112122
O-Ring for DN 8, DN 10	EPDM	ø 13.95 x 2.62	Copper tube and adapter	112124
O-Ring for DN 15	EPDM	ø 17.86 x 2.62	Copper tube and adapter	112265
O-Ring for DN 20	EPDM	ø 21.89 x 2.62	Copper tube and adapter	112723
O-Ring for DN 25	EPDM	ø 31 x 3	(as a replacement, already assembled)	112792
Connection copper tube for DN 8, 10		L=150 mm		112121
Connection copper tube for DN 15		L=150 mm		112211
Connection copper tube for DN 20		L=150 mm		112306
Adapter for DN 8 und DN 10	Rp ¾		Stainless steel 1.4305/AISI 303	112655
Adapter for DN 15	Rp ½		Stainless steel 1.4305/AISI 303	112660
Adapter for DN 20	Rp ¾		Stainless steel 1.4305/AISI 303	112661


¹⁾ Accessories supplied loose

²⁾ Connection set includes: 2x Clip, 2x Copper tubes or Adapter and 2x O-Ring


Dimension diagram DN 6, 8, 10, 15, 20, 25

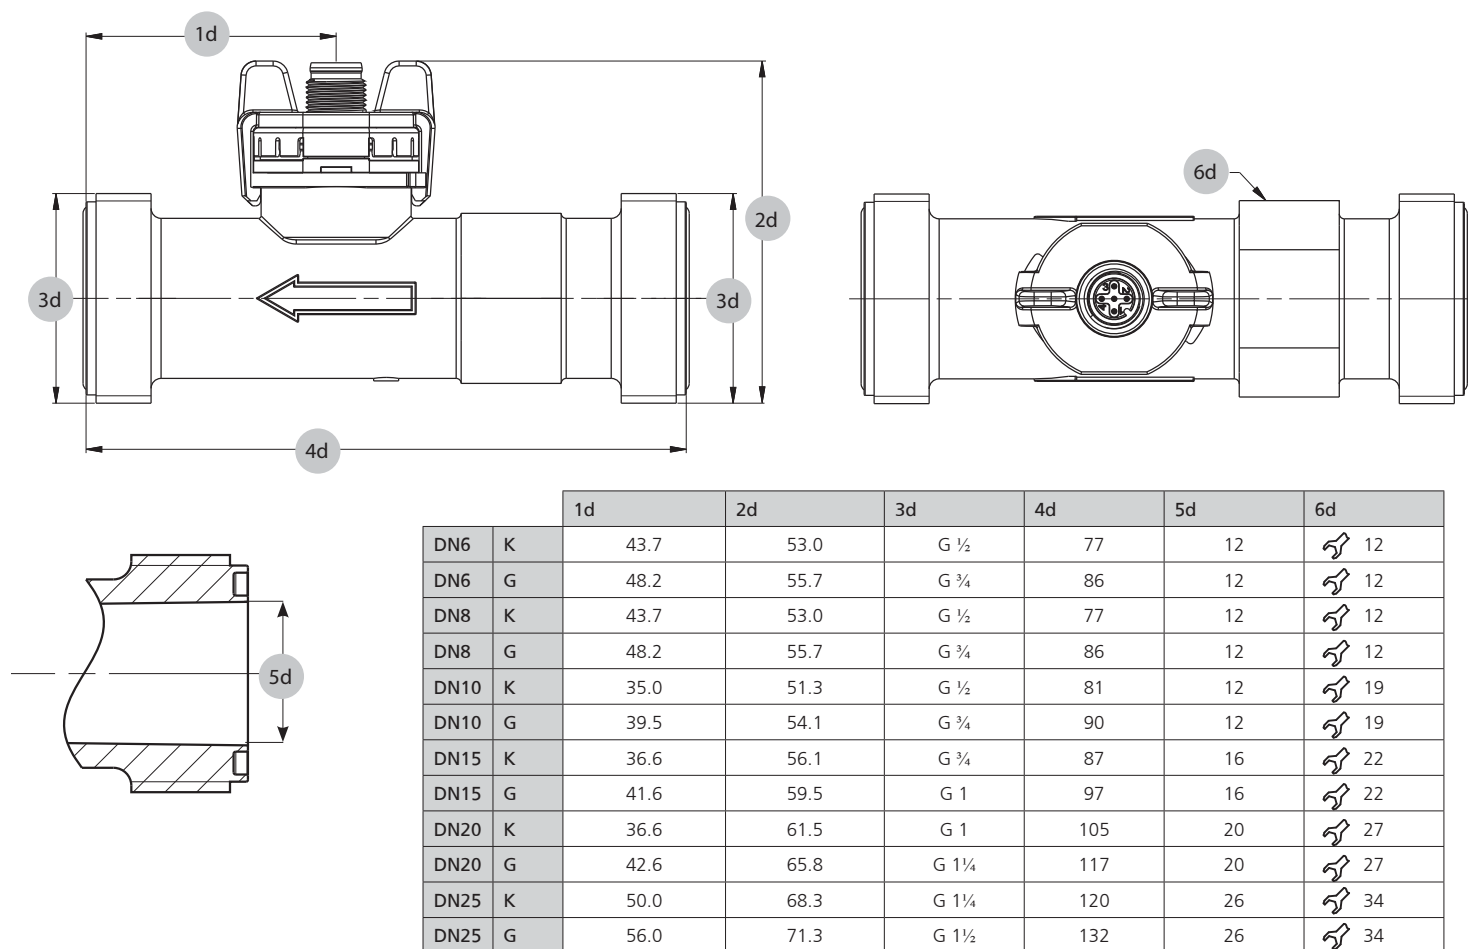

Dimension diagram DN 8, 10, 15, 20

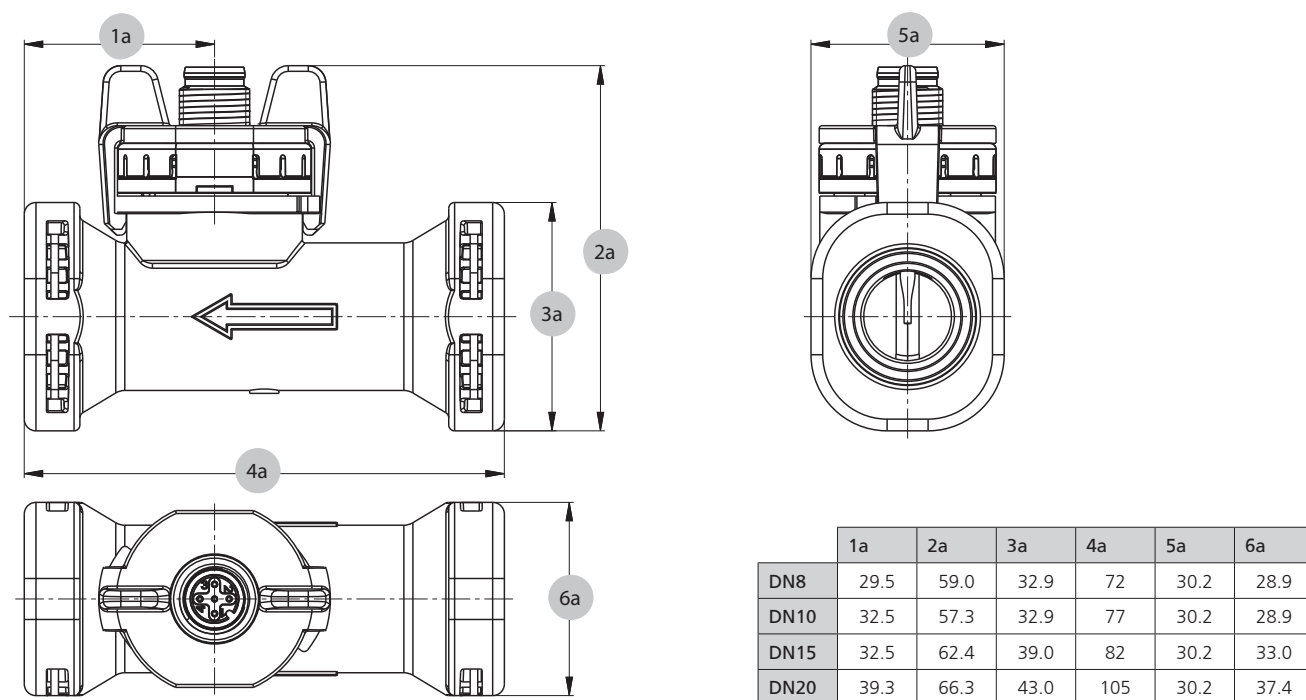


Admissible locking torque

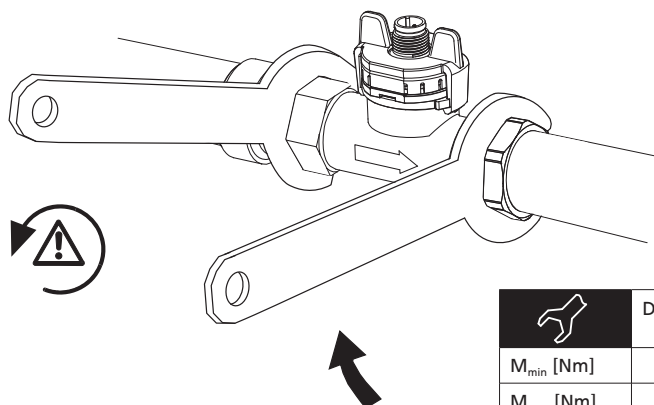


	DN6/8/10 G ½	DN6/8/10 G ¾	DN15 G ¾	DN15 G1	DN20 G1	DN20 G1 ¼	DN25 G1 ¼	DN25 G1 ½
M_{min} [Nm]	1	1	1	2	2	2.5	2.5	2.5
M_{max} [Nm]	12	12	12	12	12	15	15	15

Accessories DN 8, 10, 15, 20

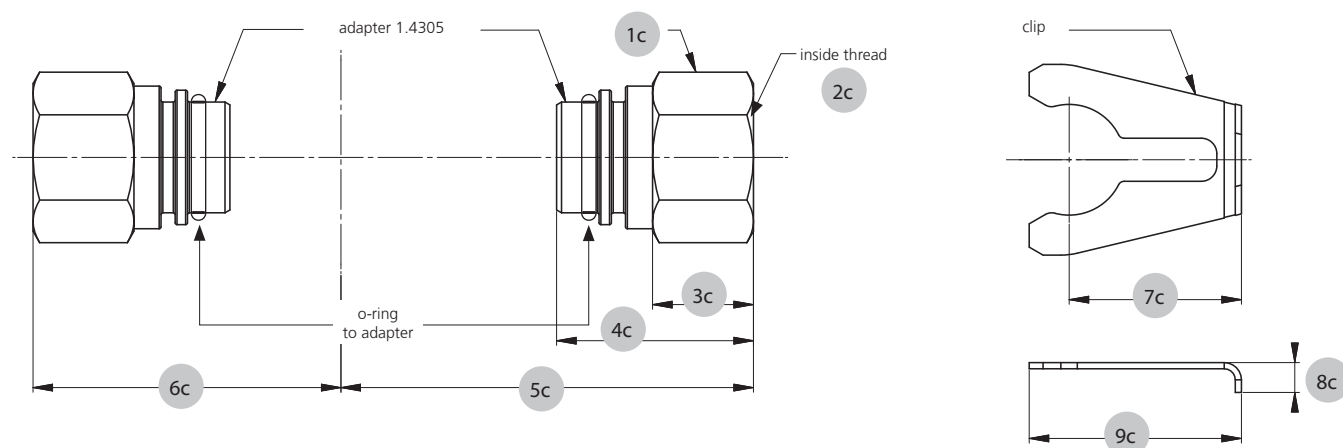

	1c	2c	3c	4c	5c	6c	7c	8c	9c
DN8	22	Rp ⅜ DIN 2999 length min. 9	14.0	29	57.65	44.65	24.5	6.00	30.8
DN10	22	Rp ⅜ DIN 2999 length min. 9	14.0	29	59.65	47.55	24.5	6.00	30.8
DN15	24	Rp ½ DIN 2999 length min. 11.5	16.4	32	67.05	50.05	28.0	4.85	34.5
DN20	30	Rp ¾ DIN 2999 length min. 13	18.5	38	82.25	58.85	28.0	8.00	34.5

Geometry of customers connection tube DN 8, 10, 15, 20

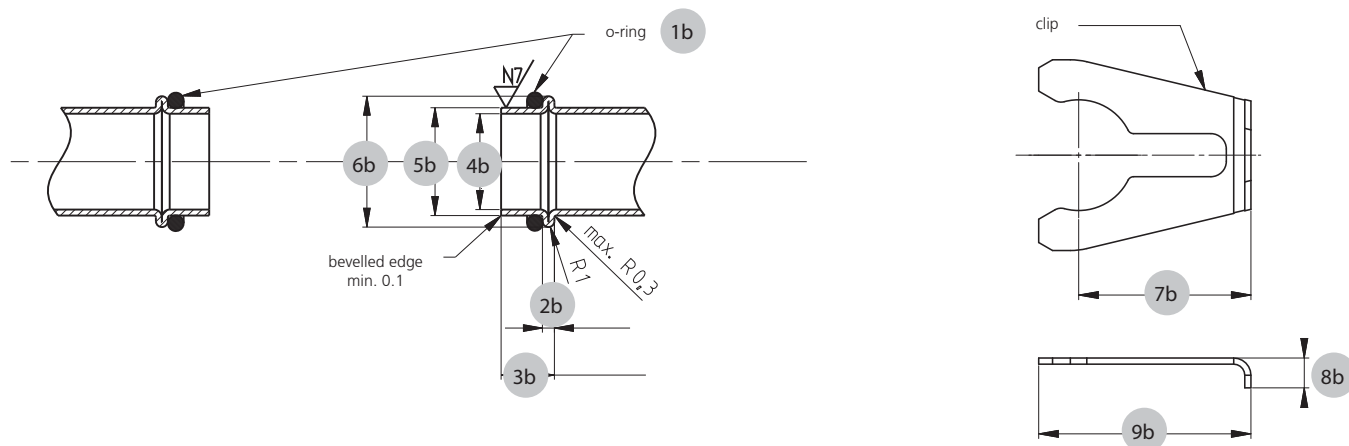


	1b	2b	3b	4b	5b	6b	7b	8b	9b
DN8	ø 13.95x262	2 ± 0.2	8.9 ± 0.2	ø 13 ± 0.2	ø 15.00 ± 0.08	ø 18.88 ± 0.1	24.5	6.00	30.8
DN10	ø 13.95x262	2 ± 0.2	8.9 ± 0.2	ø 13 ± 0.2	ø 15.00 ± 0.08	ø 18.88 ± 0.1	24.5	6.00	30.8
DN15	ø 17.86x2.62	2 ± 0.2	8.9 ± 0.3	ø 16 ± 0.2	ø 18.00 ^{+0.08} _{-0.06}	ø 21.85 ± 0.1	28.0	4.85	34.5
DN20	ø 21.89x2.62	2 ± 0.2	12.9 ± 0.3	ø 20 ± 0.2	ø 22.00 ^{+0.08} _{-0.06}	ø 25.85 ± 0.1	28.0	8.00	34.5

Tube mounting instructions

Consider the following to ensure the correct function of the sensor.


- Only diameter changes from large to small are allowed.
- Avoid repeated elbows in the same level at entryside

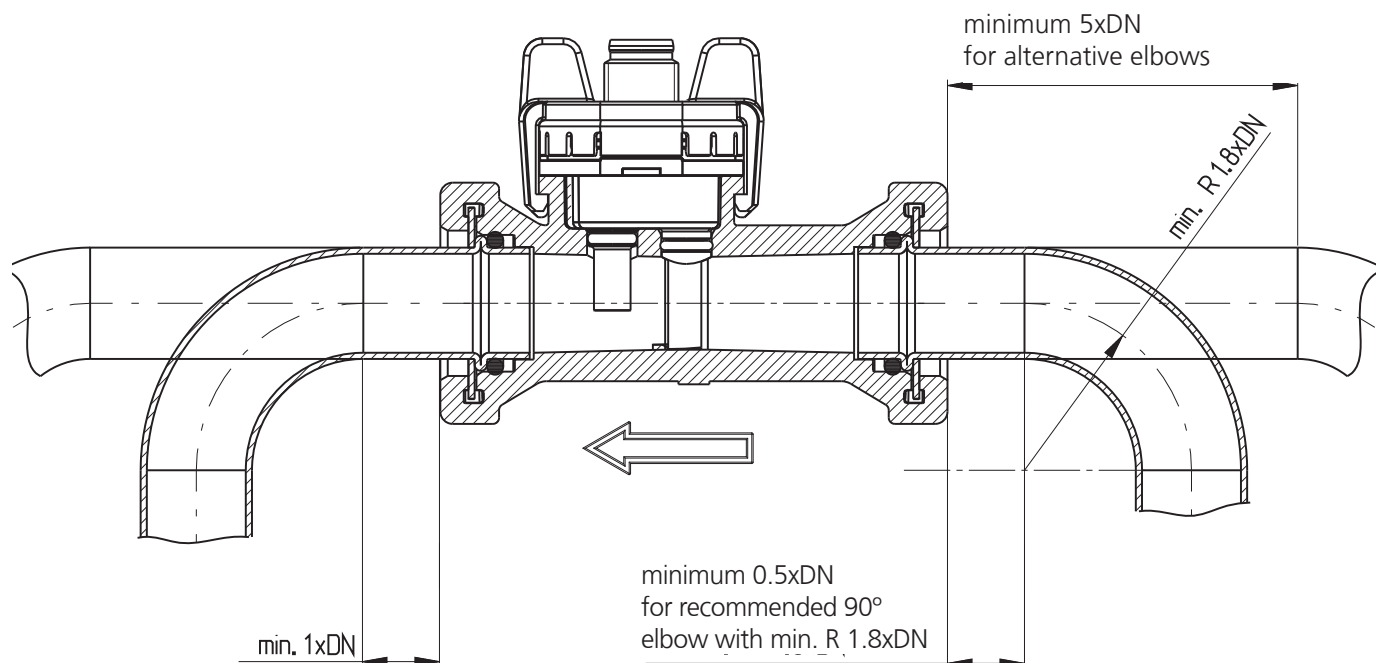


Electrical connection

Connector M12x1 without temperature measurement


1



Frequency output



current output




voltage output


Pin		Colour
1		brown
3	1	blue
4		black
1		brown
2		white
3	2	blue
4		black
5		gray

Connector M12x1 with temperature measurement


2

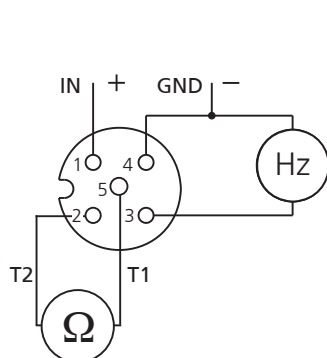


frequency output
with PT1000

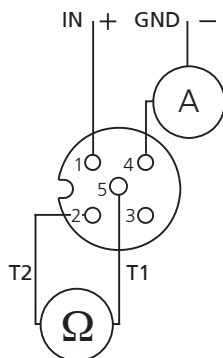

current output
with PT1000





voltage output
with PT1000




voltage output with
temperature output 0 ...10 V

With the following definitions we are able to correct the influence of media with higher viscosity than water (= media viscosity > 1.8 cSt) in order to reach a measuring accuracy of 3% fs in the range of 1.8 - 4 cSt and of 4% in the range of 4 - 14 cSt (= viscosity in cSt).


Definition of viscosity of glycol-water-compound

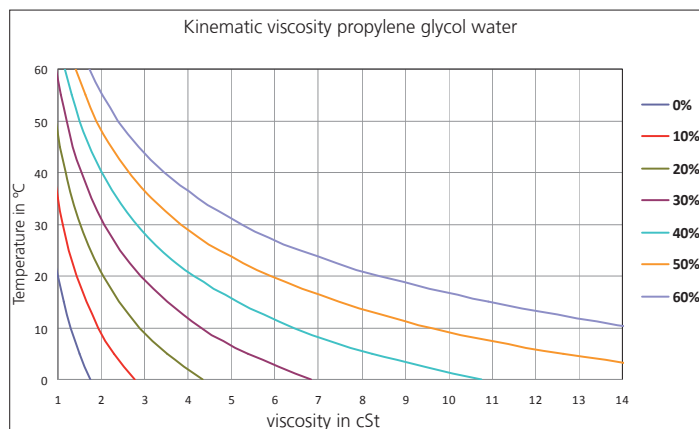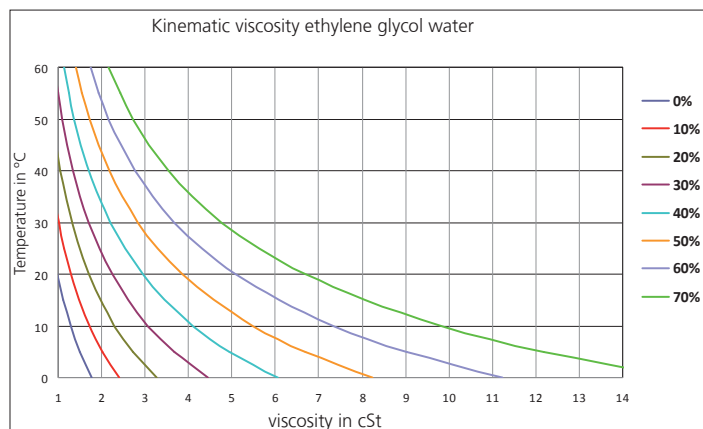

Definition of respond threshold Q_{min}

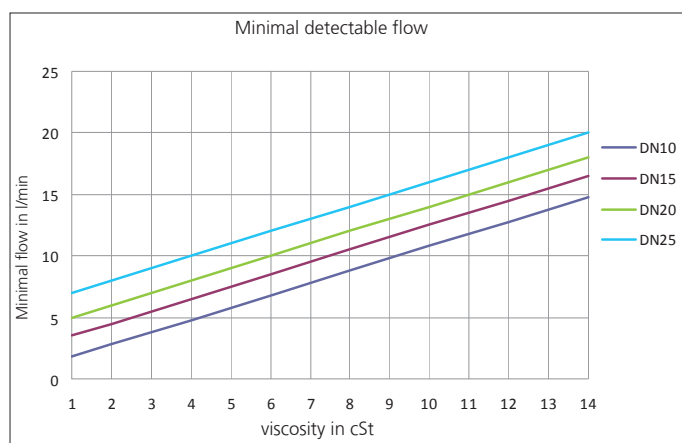

Definition of characteristic line formula $Q = k * f - Q_0$

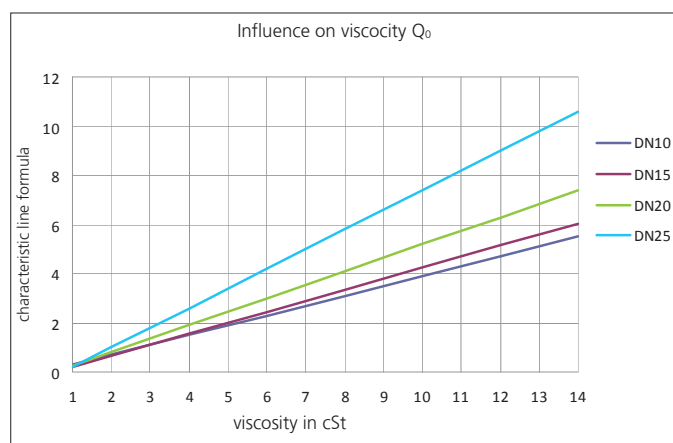

Formula respond threshold Q_{min} in l/min

DN 10: $Q_{min} = v + 0.8$
 DN 15: $Q_{min} = v + 2.5$
 DN 20: $Q_{min} = v + 4.0$
 DN 25: $Q_{min} = v + 6.0$

Formula characteristic line for $Q \geq Q_{min}$ in l/min

Frequency output:

DN10: $Q = 0.0832 * f - 0.40v + 0.20$
 DN15: $Q = 0.1843 * f - 0.45v + 0.25$
 DN20: $Q = 0.3754 * f - 0.55v + 0.25$
 DN25: $Q = 0.7467 * f - 0.80v + 0.60$

Voltage output 0 ... 10 V

DN10: $Q = 3.2 * U_{Out} - 0.40v + 0.40$
 DN15: $Q = 5.0 * U_{Out} - 0.45v + 0.45$
 DN20: $Q = 8.5 * U_{Out} - 0.55v + 0.55$
 DN25: $Q = 15.0 * U_{Out} - 0.80v + 0.80$

Current output 4 ... 20 mA (I in mA)

DN10: $Q = 2.000 * (I - 4 \text{ mA}) - 0.40v + 0.40$
 DN15: $Q = 3.125 * (I - 4 \text{ mA}) - 0.45v + 0.45$
 DN20: $Q = 5.313 * (I - 4 \text{ mA}) - 0.55v + 0.55$
 DN25: $Q = 9.375 * (I - 4 \text{ mA}) - 0.80v + 0.80$

Huba Control AG
Headquarters

Industriestrasse 17
5436 Würenlos
Telefon +41 (0) 56 436 82 00
Telefax +41 (0) 56 436 82 82
info.ch@hubacontrol.com

Huba Control AG
Niederlassung Deutschland

Schlattgrabenstrasse 24
72141 Walddorfhäslach
Telefon +49 (0) 7127 23 93 00
Telefax +49 (0) 7127 23 93 20
info.de@hubacontrol.com

Huba Control SA
Succursale France

Rue Lavoisier
Technopôle Forbach-Sud
57602 Forbach Cedex
Téléphone +33 (0) 387 847 300
Télécopieur +33 (0) 387 847 301
info.fr@hubacontrol.com

Huba Control AG
Vestiging Nederland

Hamseweg 20A
3828 AD Hoogland
Telefoon +31 (0) 33 433 03 66
Telefax +31 (0) 33 433 03 77
info.nl@hubacontrol.com

Huba Control AG
Branch Office United Kingdom

Unit 13 Berkshire House
County Park Business Centre
Shrivenham Road
Swindon - Wiltshire SN1 2NR
Phone +44 (0) 1993 776667
Fax +44 (0) 1993 776671
info.uk@hubacontrol.com