

Hallway

DALI-2 Input Device - surface
EAN 4007841 064549
Article number 064549



max. 25 x 3 m



IP20



brightness



temperature



air humidity



2 - 4 m



Input Device

5 years

manufacturer's
warranty steinel-
professional.de/
garantie



CE

Function description

The cleverer hallway sensor knows more. Perfect radial detection up to 25 m – ideal for long corridors and hallways. Reach can be adjusted in both directions. Contemporary Control PRO II design. Featuring Bluetooth technology. Interfaces for COM1, COM2, DALI-2 APC, DALI-2 IPD, KNX, IP and BT IPD (Slave).

Technical specifications

Dimensions (L x W x H)	62 x 123 x 123 mm
With motion detector	Yes
Manufacturer's Warranty	5 years
Settings via	Bluetooth, Bus
With remote control	No
Version	DALI-2 Input Device - surface
PU1, EAN	4007841064549
Type	Presence detector
Application, place	Indoors
Application, room	Indoors, corridor / aisle
Colour	white
Colour, RAL	9003
Includes corner wall mount	No
Installation site	ceiling
Installation	Surface wiring, Ceiling
IP-rating	IP20
Ambient temperature	-20 – 50 °C

Mounting height	2,00 – 4,00 m
Mounting height max.	4,00 m
Optimum mounting height	2,8 m
HF-system	5,8 GHz
Detection	also through glass, wood and stud walls
Detection angle	Aisle, 360 °
Angle of aperture	140 °
Sneak-by guard	Yes
Capability of masking out individual segments	No
Electronic scalability	Yes
Mechanical scalability	No
Reach, radial	25 x 3 m (75 m ²)
Reach, tangential	25 x 3 m (75 m ²)
Transmitter power	< 1 mW
Basic light level function	No

Hallway

DALI-2 Input Device - surface
EAN 4007841 064549
Article number 064549



Technical specifications


Material	Plastic
Mains power supply	12 – 23 V
Power supply, detail	DALI bus
Sensor Technology	High frequency

Main light adjustable	No
Twilight setting TEACH	No
Constant-lighting control	Yes
Interconnection	Yes
Type of interconnection	Master/slave
Interconnection via	Bluetooth, DALI bus

Hallway


DALI-2 Input Device - surface
EAN 4007841 064549
Article number 064549

Detection Zone



Mögliche Montagehöhe: 2,00 m – 4,00 m
Orange: radial und tangential

Dimension Drawing

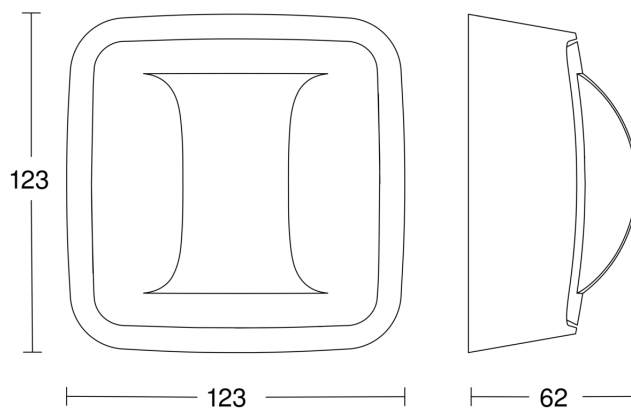

Circuit diagram

