

# IS 3360

V3 KNX - in-ceiling installation, rd. white  
 EAN 4007841 079666  
 Article number 079666



infrared sensor  
360°



max. 20 m



KNX



IP54



2 - 1000 lux



1 - 255 min



ideal 2,5 - 4 m




Teach

Teach mode



energy saving



5 years

manufacturer's  
warranty steinel-  
professional.de/  
garantie

## Function description

Higher, further, faster. Infrared motion detector IS 3360 for indoors and out, ideal for watching over high spaces and large areas, such as multi-storey and underground car parks, installation height up to 4 m, 360° angle of coverage, reach 20 m max. (tangential). Available either in round or square surface-mounted, concealed or In-ceiling installation.

## Technical specifications

Dimensions (Ø x H)	124 x 121 mm
With motion detector	Yes
Manufacturer's Warranty	5 years
Settings via	ETS software, Remote control, Bus, Smart Remote
Version	KNX - in-ceiling installation, rd. white
PU1, EAN	4007841079666
Type	Motion and Presence Detector
Application, place	Indoors
Application, room	production facilities, recreation room, changing room, function room / ancillary room, sports hall, reception / lobby, stairwell, WC / washroom, multi-storey / underground car park, warehouse, Indoors
Colour	white
Colour, RAL	9003
Includes corner wall mount	No

Optimum mounting height	2,8 m
Detection angle	360 °
Angle of aperture	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	Ø 8 m (50 m²)
Reach, tangential	Ø 40 m (1257 m²)
Reach, presence	Ø 3 m (7 m²)
Switching zones	1416 switching zones
Twilight setting	2 – 1000 lx
Basic light level function	Yes
Main light adjustable	0 - 100 %
Twilight setting TEACH	Yes
Constant-lighting control	Yes

# IS 3360

V3 KNX - in-ceiling installation, rd. white  
 EAN 4007841 079666  
 Article number 079666



## Technical specifications

Installation site	ceiling	KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 2x, Presence output, Day / night function, Logic gate
Installation	In-ceiling installation, Ceiling		
IP-rating	IP20		
Ambient temperature	-20 – 50 °C		
Material	Plastic	Interconnection	Yes
Power supply, detail	KNX bus	Type of interconnection	Master/slave
With bus coupling	Yes	Interconnection via	KNX bus
Sensor Technology	Passive infrared	Rated current	12,5 mA
Mounting height	2,50 – 4,00 m		
Mounting height max.	4,00 m		

## Accessories

EAN 4007841 593018	Service remote control RC6 KNX
EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 592912	User remote control RC7 KNX
EAN 4007841 056742	Black cover for IR-sensors


# IS 3360

V3 KNX - in-ceiling installation, rd. white

EAN 4007841 079666

Article number 079666

## Detection Zone

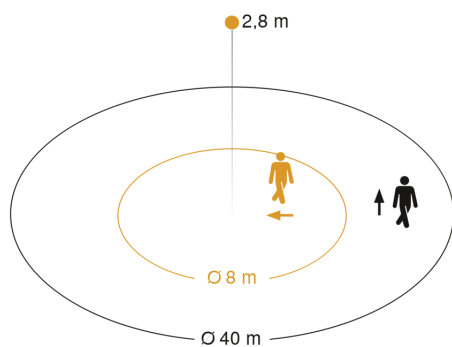


Mögliche Montagehöhe: 2,50 m – 4,00 m


Orange: radial

Schwarz: tangential


## Dimension Drawing 1

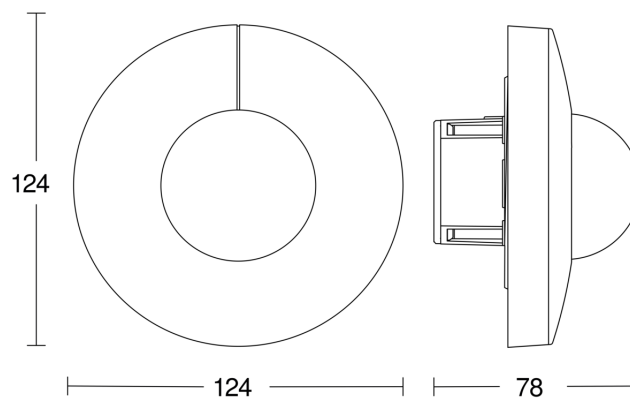

## Dimension Drawing 2

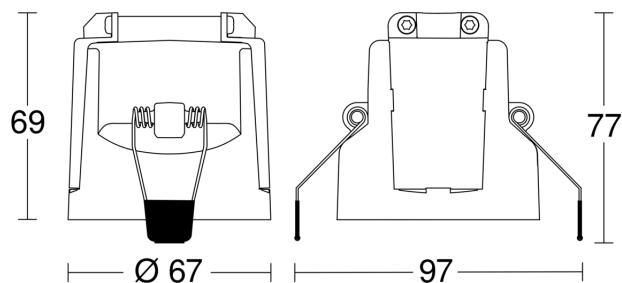

## Master circuit diagram

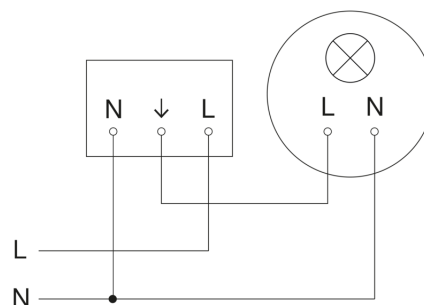

# IS 3360

V3 KNX - in-ceiling installation, rd. white

EAN 4007841 079666

Article number 079666

## Master/slave interconnection circuit diagram

