


### sceneCOM L, XL

sceneCOM L, XL (multi-channel)

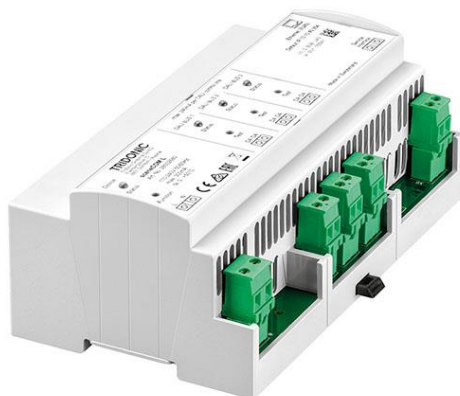

#### Product description

- \_ Independent lighting control for up to 192 DALI control gears on 3 DALI lines
- \_ Simple setup via WEB interface
- \_ Cross DALI line control
- \_ DALI emergency lighting control gear test scheduling and monitoring (with sceneCOM XL EM and sceneCOM XL EM Bac, up to 50 emergency gears)
- \_ Complying with IEC 62034
- \_ 5-year guarantee

#### Housing properties

- \_ Casing: polycarbonate, white
- \_ Type of protection IP20
- \_ For installation in switching cabinets

#### Interfaces

- \_ 3 DALI lines
- \_ BACnet interface (sceneCOM XL EM Bac)
- \_ Terminal blocks: screw terminals

#### Functions

- \_ Addressing wizard
- \_ Presence linking
- \_ Local and downloadable backup
- \_ Freely programmable daily scheduling with calendar function
- \_ Self-contained emergency luminaires
- \_ Freely programmable shows
- \_ RGB and Tunable White
- \_ Scenes and zones

#### Website


<http://www.tridonic.com/28002683>



**sceneCOM L, XL**

sceneCOM L, XL (multi-channel)

The complete data sheet for this product is available in the Downloads section.

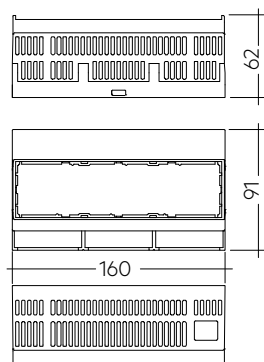**Ordering data**

Type	Article number	Packaging, carton	Weight per pc.
sceneCOM XL EM BAC	28002683	36 pc(s).	0.37 kg

**Technical data**

Rated supply voltage	110 – 240 V
Mains frequency	50 / 60 Hz
Power consumption	< 20 W
Ethernet Schnittstelle	1 x RJ45
DALI interface	3 x
Max. current per channel	240 mA
Ethernet port	1 x 10/100 Mbit/s
Status indicators LED	Device status, DALI status
Operating Temperature at upright mounted	0 ... +50 °C
Operating Temperature at flat mounted	0 ... +40 °C
Mounting	DIN rail mounting, 35 mm
Housing material	PC, halogen-free polycarbonate, non-flammable
Type of protection	IP20
Dimensions L x W x H	160 x 91 x 62 mm

**Approval marks****Standards**

IEC 60950-1, EN 55022, EN 55024, EN 61547, EN 61000-4-3, EN 61000-6-1, EN 61347-2-11