

# Diamant *PRO*

## MOTORIZED VALVES

### USE

The **Diamant *PRO*** motorized valve is specifically used for the interception and regulation of fluids in:

- open and closed hydraulic systems
- zone heating/cooling systems
- drinking water systems, with suitable valve body
- systems using alternative energy
- thermal solar systems
- industrial systems in general, using hot and cold fluids
- automation systems

The special feature of all the actuators of the ***PRO*** Range is the fact that they can be used in **harsh environments and severe weather conditions**.

All **Diamant *PRO*** motorised valves are equipped with an **"ALL IN ONE"** system, which allows to set the **2-POINT** or **3-POINT** electrical control with a **jumper-type selector**, according to the user's needs.



### Actuators

**Diamant *PRO*** actuator is available in the following versions



COMPARATO connection



ISO 5211 connection

TECHNICAL FEATURES		Diamant <i>PRO</i>			
Electric control		ALL IN ONE			
		3-point		2-point	
Connection with valve body		COMPARATO connection	ISO 5211 connection	COMPARATO connection	ISO 5211 connection
		modulating / ON/OFF		ON/OFF	
Operation		90° clockwise and counterclockwise			
		180° clockwise and counte clockwise			
Rotation		2-way			
		3-way with switch			
		3-way with mixer		-	
		by-pass			
		arrow indicating the ball position			
		bidirectional - synchronous			
		230 V ; 50 Hz *			
Position indicator		110 V ; 50 Hz *			
		24 V ; 50 Hz *			
		by means of a terminal block inside the actuator			
Motor		4 seconds ; 5 Nm			
		12 seconds ; 11 Nm			
Power supply		35 seconds ; 11 Nm (standard version)			
		106 seconds ; 11 Nm			
Electrical connection		320 seconds ; 11 Nm			
Operating time ( ↗ 90° ) and rated torque (for a 180° operation, double the provided times)					

\* for 60 Hz versions, please contact our Technical Office

to be continued (next page)



COMPARATO NELLO SRL

UNI EN ISO 9001: CERTIFIED COMPANY 2015

# Diamant *P20*

## MOTORIZED VALVES

### Actuators



COMPARATO connection



ISO 5211 connection


TECHNICAL FEATURES		Diamant <i>P20</i>	
Input power (35, 106, 320-second version)		6	VA (230 V ; 50 Hz version)
		6	VA (110 V ; 50 Hz version)
Input power (4 and 12-second version)		7,5	VA ( 24 V ; 50 Hz version)
		13	VA (230 V ; 50 Hz version)
Maximum current on the outlet phase to terminals 4 and 5		11	VA (110 V ; 50 Hz version)
		12	VA ( 24 V ; 50 Hz version)
Maximum current tolerated by extra microswitches		1 A resistive	
Maximum noise (at a 1 meter distance)		35 dB(A) standard version	
Operational room temperature		- 10° C ÷ 50° C	
Fluid temperature		see page 14-15	
Protection degree		IP67	
External covering		featuring a ribbed surface, in a glass-reinforced "polyarylamide" techno-polymer, particularly sturdy and damp-proof	
Material of external metal components		AISI 303 GVR and brass CW617N	
Washers material		silycone	
Type of reduction unit		top performance COMPARATO	
Maintenance		none	
Storage and transport conditions		- 40° C ÷ 80° C, UR max 95% - no condensation	
Certification		EC	

**P20** RANGE  
SPECIFIC  
FEATURES

### ACCESSORIES UPON REQUEST

- Actuator override, to activate the valve in case of emergency or black-out (not available for 4 and 12-second version).
- One additional opening feedback microswitch (free contact diverter) .  
Example of use: notification of opening, pump relay actuation, boiler control, notification to PLC, etc.)
- One additional closing feedback microswitch (free contact diverter).  
Example of use: notification of closing, relay actuation, notification to PLC, etc.
- Insulation spacers with and without manual override (see "Valve bodies" section).
- Anti-condensation resistance, for preventing the risk of condensation inside the actuator.
- Cable gland PG 13,5.

Microswitches  
EXTRA

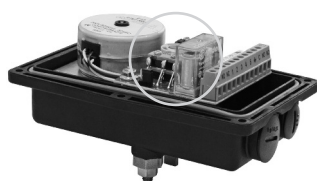


Manual override  
from the top



Cable gland PG 13,5



Anti-condensation  
resistance

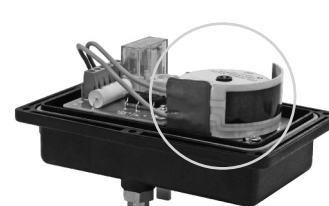

COMPARATO NELLO SRL

UNI EN ISO 9001: CERTIFIED COMPANY 2015

# Diamant PRO

## MOTORIZED VALVES


### ELECTRICAL CONNECTIONS

#### 2-POINT CONTROL – ON/OFF (SWITCH)

- terminal 1: neutral;
- terminal 2: **fixed** closing phase;
- terminal 3: opening phase.

The phase to terminal 3 can be supplied by means of a switch.

**One electric control can activate several actuators.**

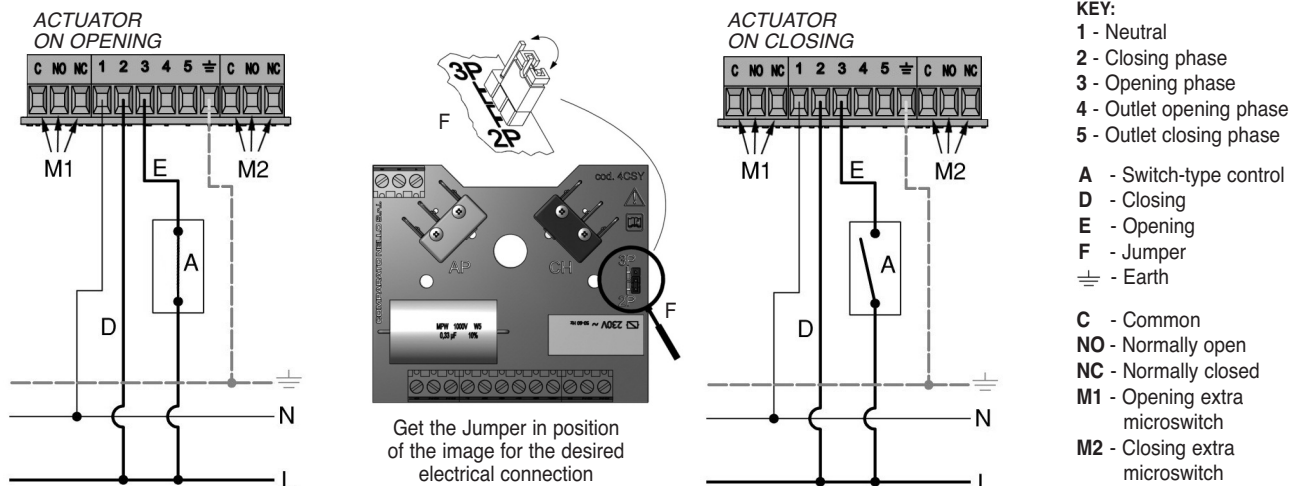

The figures show the wiring diagram of the actuator with **2-POINT ON/OFF** control device.


The wiring diagram is shown open and closed, respectively. Supplying power by means of a phase across terminal 2 causes the valve to close (electrical automatic closing); supplying power across terminal 3, too, causes the valve to open.

#### 3-POINT CONTROL – ON/OFF (DIVERTER)

- terminal 1: neutral;
- terminal 2: closing phase;
- terminal 3: opening phase.

Phase shall be diverted to terminal 2 or terminal 3.

**Each actuator must be operated by a single electric control.**

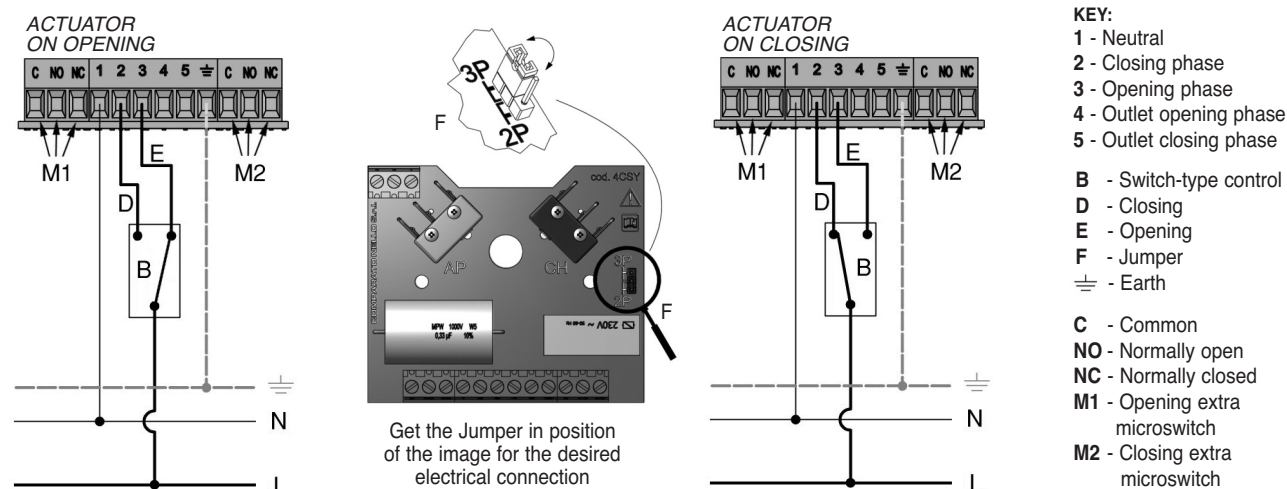

The figures show the wiring diagram of the actuator with **3-POINT ON/OFF** control device.

The wiring diagram is shown open and closed, respectively. When the phase flows across terminal 3, the valve opens; on the contrary, when the phase flows across terminal 2, the valve closes.

# Diamant PRO


## MOTORIZED VALVES

### ELECTRICAL CONNECTIONS

#### 3-POINT CONTROL – MODULATING (2 SWITCHES)

- terminal 1: neutral;
- terminal 2: closing phase;
- terminal 3: opening phase.

The phase can be diverted to terminal 2, terminal 3 or to none of them, in order to obtain partial openings of the valve. This is necessary for modulating the flow when a regulation is needed. **Each actuator must be operated by a single electric control.**

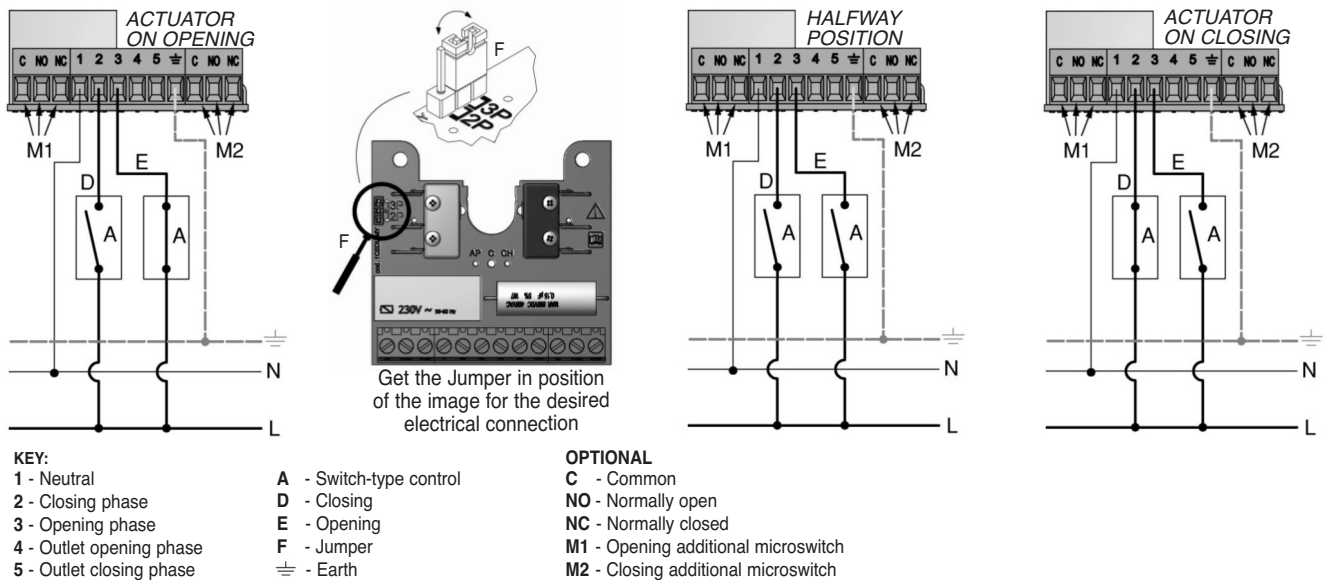


The figures show the wiring diagram of the actuator with **3-POINT MODULATING** control device.

The wiring diagram is shown in an open, closed and intermediate position, respectively. When the phase flows across terminal 3, the valve opens; on the contrary, when the phase flows across terminal 2, the valve closes. When there is no phase on the above mentioned terminals, the actuator can take intermediate positions between the points of complete closure and complete opening, allowing a modulating operation.

**Should power fail, the actuator remains in the position it was when the power outage occurred.**


The layout of the extra (optional) microswitch contacts is shown in the following figures.

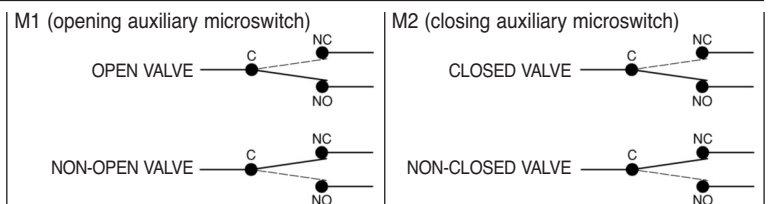

**Diamant PRO** actuators have the following features:

- outlet phase to terminal 4 with open valve, to be used as a remote control (notification of opening, pump relay actuation, etc.);
- outlet phase to terminal 5 with closed valve, to be used as a remote control (notification of closing);

#### EXAMPLES OF ELECTRICAL CONNECTIONS

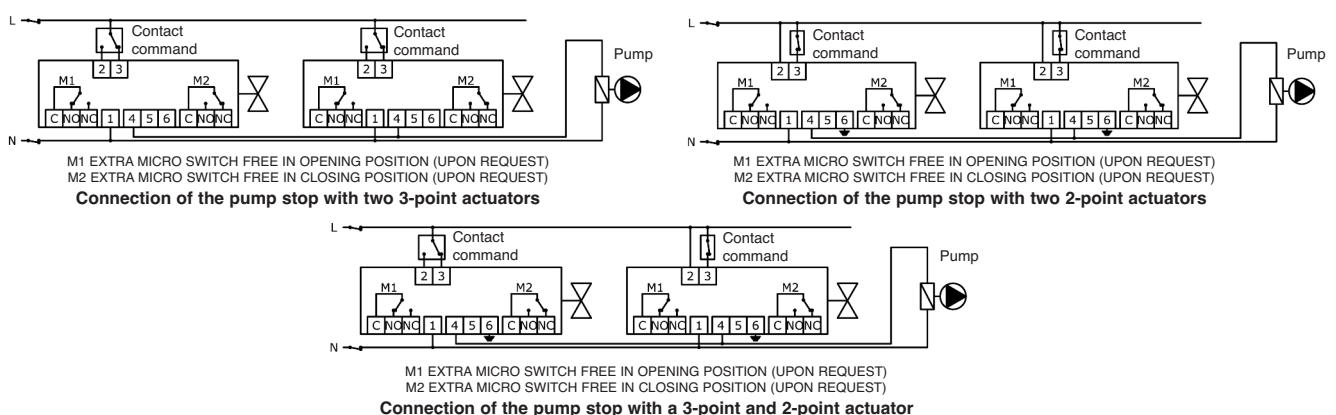

COMPARATO NELLO SRL

UNI EN ISO 9001: CERTIFIED COMPANY 2015


# Diamant *P20*

## MOTORIZED VALVES

### MANUAL OPENING

The **Diamant P20** can be equipped with manual override from the top (with the exception of the version with 4 and 2-second operating time).

The manual override allows to activate the valve in case of emergency or black-out.

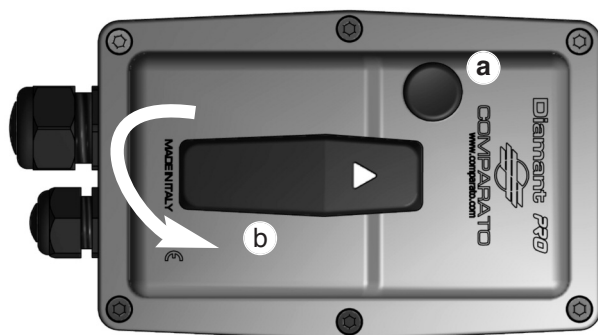

Actuator in **OPEN** position.

Press the unlock button (a) and, at the same time, rotate the lever (b) of 90° **COUNTERCLOCKWISE**, in order to bring the actuator in the **CLOSING** position.




Actuator in **CLOSED** position.

Press the unlock button (a) and, at the same time, rotate the lever (b) of 90° **COUNTERCLOCKWISE**, in order to bring the actuator in the **OPENING** position.


### INSTALLATION

The valve should be installed in such a way that the actuator connection is not facing down.


When the valve works with low-temperature fluids (possible frost formation on the valve stem) or with high-temperature fluids (danger of actuator overheating), it is advisable to install it in the recommended position, as shown in the picture.

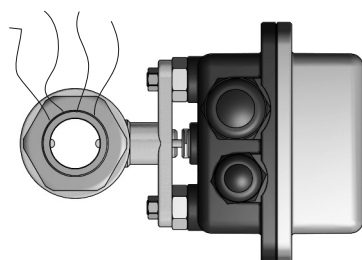

RECOMMENDED POSITION

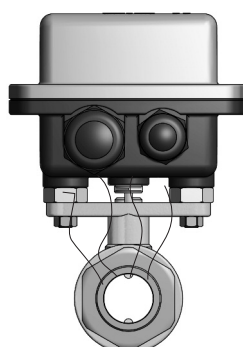

ALLOWED POSITION

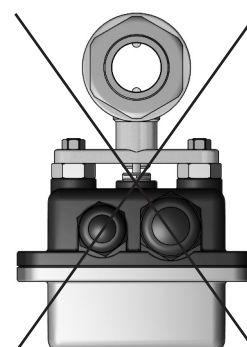

FORBIDDEN POSITION



#### WARNING!

Do not wash directly on actuator at high pressure (i.e. pressure washer)



COMPARATO NELLO SRL


UNI EN ISO 9001: CERTIFIED COMPANY 2015




# Diamant *PRO*

## MOTORIZED VALVES

### CONNECTION TO THE VALVE BODY

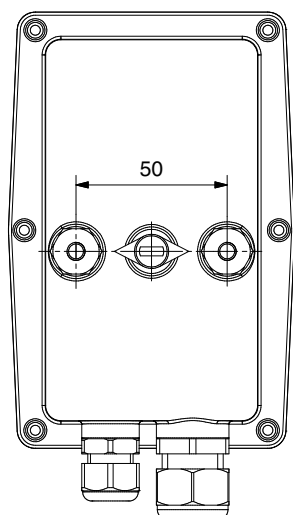

COMPARATO CONNECTION

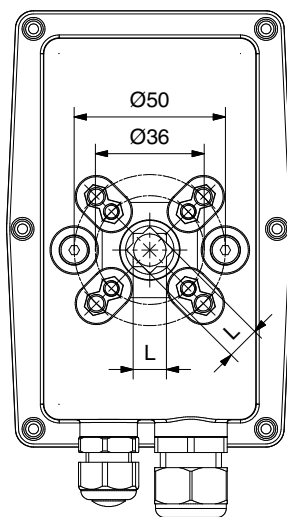

ISO 5211 CONNECTION

The **ISO 5211** connection on the **Diamant *PRO*** has the following sizes:

ISO 5211 connection	L
F03	9 mm
F05	11 mm

### Valve bodies with tangs COMPARATO CONNECTION

#### BRASS Valve bodies



2-WAY - FULL FLOW  
Ø 1/2" - 3/4" - 1"




3-WAY - DIVERTER / MIXER - FULL FLOW  
Ø 3/4" - 1"



BY-PASS  
Ø 3/4" - 1"

Male connections are all provided with tang, which is extremely convenient during the installation and allows to position the valve body and then the actuator properly; moreover, it helps performing any maintenance work.

The ball cut-off ensures the best hydraulic tightness and reduced pressure loss

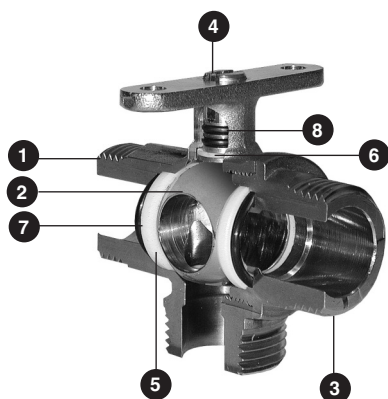

#### MATERIAL USED IN THE VALVE BODY

1 BODY	BRASS CW617N UNI 5705
2 BALL	BRASS CW617N UNI 5705 CHROMED NIKEL
3 COUPLING	BRASS CW617N UNI 5705
4 CONTROL ROD	BRASS CW617N UNI 5705
5 BALL SEAL	P.T.F.E.
6 ROD SEAL	P.T.F.E.
7 BALANCING O-RING	EPDM
8 CONTROL ROD O-RING	EPDM

# Diamant *PRO*

## MOTORIZED VALVES

### BRASS Valve Bodies WITH INSULATION SPACER AND MANUAL OVERRIDE

The valve bodies which are suitable for **Diamant *PRO*** can be equipped with spacers to protect the valve and insulate the actuator from the thermal conduction coming from the valve body. Moreover, the above mentioned spacers can be provided with a lever which enables manual opening and closing operations.



2-WAY · FULL FLOW  
Ø 1/2" · 3/4" · 1"  
with spacer for insulation



2-WAY · FULL FLOW  
Ø 1/2" · 3/4" · 1"  
with spacer for insulation  
and manual override



3-WAY · DIVERTER / MIXER · FULL FLOW  
Ø 3/4" · 1"  
with spacer for insulation



3-WAY DIVERTER / MIXER · FULL FLOW  
Ø 3/4" · 1"  
with spacer for insulation  
and manual override

### 2-WAY valve bodie

The valve body can be mounted in both flow directions, without distinction

### 3-WAY diverter/mixer valve bodies

The 3-way version of **Diamant *PRO*** is available with two different balls. In both cases one of the holes is positioned on the common way, which is therefore always open

#### MIXER VALVE BODY (3-HOLE BALL)

It has a 3-hole ball with one hole pointed towards the common way (always open) and two more holes which are orthogonal to the first one and to each other. When one of these two holes is pointed towards one of the two inlets, the second inlet is closed.

By means of a rotation of 90° of the ball, the second hole points towards the second inlet and closes the first one.

One of the special features of the 3-hole ball valve is the fact that the 3 ways can communicate simultaneously, during the ball rotation from one deviation position to another. At the end of the operation, the valve is a diverter again, for all practical purposes; therefore, the use of the 3-way 3-hole diverter valve is advisable when the diverted ways can communicate.

This is generally the case of heating systems. Moreover, the above mentioned condition allows this valve to be used for mixing. On the control rod there are two symbols (**two dots and a dash**) which indicate which way is **communicating to the common one**.


#### DIVERTER VALVE BODY (2-HOLE BALL)

In a **2-hole** ball, the first hole is positioned on one of the two inlets: a 180° rotation is necessary in order to point it to the other inlet.



One of its features is the fact that one of the two inlets closes before the other opens, so that the two ways never communicate.

The 3-way, **2-hole** diverter valve is necessary when the two diverted ways must never communicate.



On the control rod there is a symbol (**two dots**) which indicates which way is **communicating to the common one**.

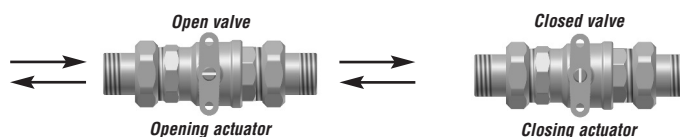

#### MIXER - 3 HOLES C = COMMON WAY

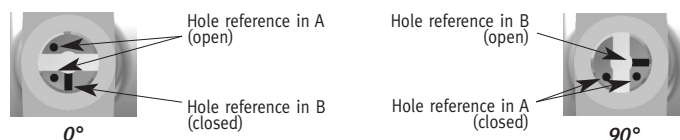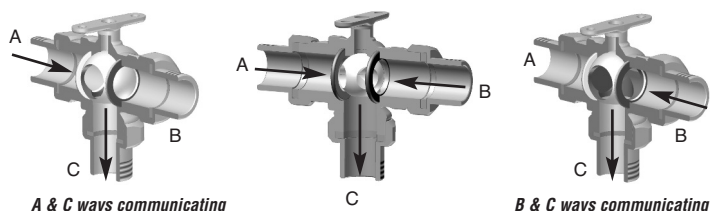

#### DIVERTER - 2 HOLES C = FLUID INLET

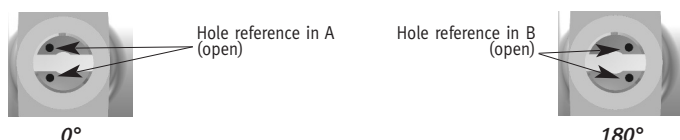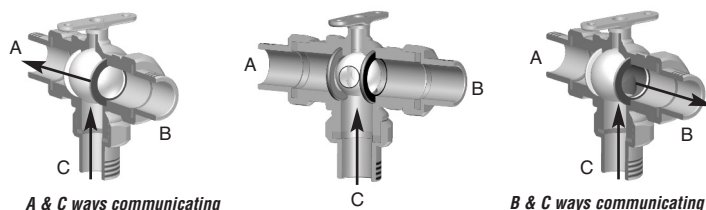

# Diamant PRO

## MOTORIZED VALVES


### BY-PASS valve bodies

In by-pass valves, the cut-off consists of a ball with a through hole, as in 2-way ones.

One of the features that distinguishes the by-pass ball from the 2-way ball is a milling which allows the recirculation of part of the outlet flow towards the return line when the valve is closed.

Therefore, in by-pass valves it is important to recognize the flow direction.

On the control rod there is a symbol (a dash) which indicates the position of the milling on the ball; when the valve is closed, it must always be oriented towards the direction of the incoming flow.

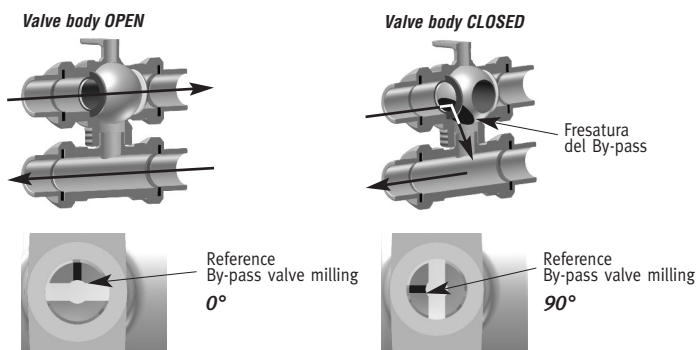

The actuator rotates **90° COUNTERCLOCKWISE** in order to move from the open position to the closed position

### ISO 5211 FEMALE valve bodies


#### BRASS valve bodies WITH INSULATION SPACER AND MANUAL OVERRIDE

suitable for distinctive temperature industrial conditions  
(glycol cooling systems, industrial systems in general with hot and cold fluids)



#### AISI 316 valve bodies WITH INSULATION SPACER AND MANUAL OVERRIDE

suitable for distinctive temperature industrial conditions  
(glycol cooling systems, industrial systems in general with hot and cold fluids)

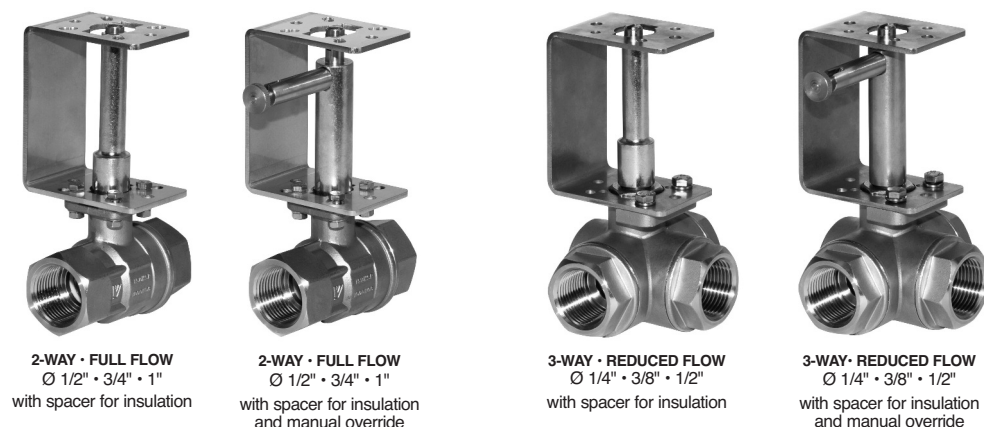


**NOTES** Valve body with spacer, to be combined with the COMPARATO CONNECTION actuator.




# Diamant PRO

## MOTORIZED VALVES

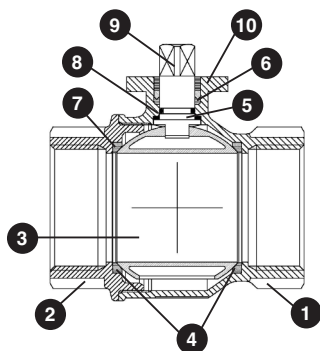


### MATERIAL USED IN THE 2-WAY F/F ISO 5211 BRASS VALVE BODY

1 BODY	BRASS CW617N UNI EN 12165
2 COUPLING	BRASS CW617N UNI EN 12165
3 BALL	BRASS CW617N UNI EN 12165
4 BALL SEAL	P.T.F.E.
5 ANTI-FRICTION SEAL	P.T.F.E.
6 ROD SEAL	P.T.F.E.
7 O-RING	FKM
8 O-RING	FKM
9 CONTROL ROD	BRASS CW617N UNI EN 12165
10 ISO 5211 FLANGE	BRASS CW617N UNI EN 12165

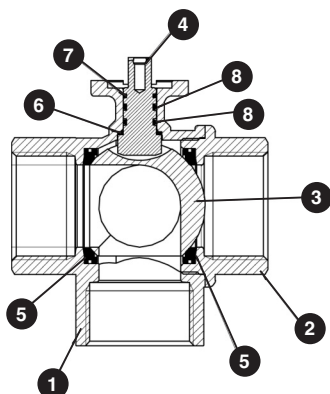


### MATERIAL USED IN THE 3-WAY F/F ISO 5211 DEVIATING/MIXING BRASS VALVE BODY

1 BODY	BRASS CW617N UNI EN 12165
2 COUPLING	BRASS CW617N UNI EN 12165
3 BALL	BRASS CW617N UNI EN 12165
4 CONTROL ROD	P.T.F.E.
5 BALL SEAL	P.T.F.E.
6 ANTI-FRICTION SEAL	P.T.F.E.
7 O-RING	FKM
8 O-RING	FKM

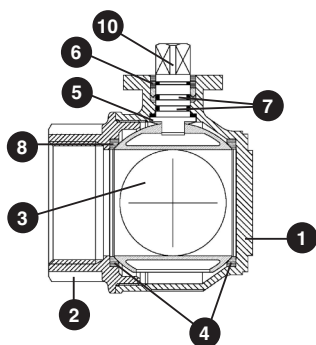

### MATERIAL USED IN THE 3-WAY F/F ISO 5211 BRASS VALVE BODY

1 BODY	BRASS CW617N UNI EN 12165
2 COUPLING	BRASS CW617N UNI EN 12165
3 BALL	BRASS CW617N UNI EN 12165
4 BALL SEAL	P.T.F.E.
5 ANTI-FRICTION SEAL	P.T.F.E.
6 ROD SEAL	P.T.F.E.
7 O-RING	FKM
8 O-RING	FKM
10 CONTROL ROD	BRASS CW617N UNI EN 12165

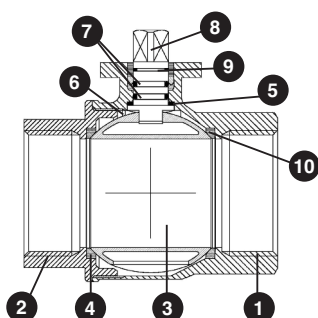

### MATERIAL USED IN THE 3-WAY F/F AISI 316 ISO 5211 VALVE BODY

1 BODY	CF8M
2 COUPLING	CF8M
3 BALL	INOX AISI 316
4 BALL SEAL	P.T.F.E.
5 ANTI-FRICTION SEAL	P.T.F.E.
6 ROD SEAL	P.T.F.E.
7 O-RING	FKM
8 O-RING	FKM
10 CONTROL ROD	INOX AISI 316

### MATERIAL USED IN THE 2-WAY F/F AISI 316 ISO 5211 VALVE BODY

1 BODY	CF8M
2 COUPLING	CF8M
3 BALL	INOX AISI 316
4 BALL SEAL	P.T.F.E.
5 SEAL	P.T.F.E.
6 ROD WASHER	P.T.F.E.
7 O-RING	FKM
8 CONTROL ROD	INOX AISI 316
9 ROD SEAL	P.T.F.E.
10 O-RING	FKM



**COMPARATO NELLO SRL**


UNI EN ISO 9001: CERTIFIED COMPANY 2015

# Diamant PRO

## MOTORIZED VALVES

### 2-WAY valve bodies

The valve body can be mounted in both flow directions, without distinction.

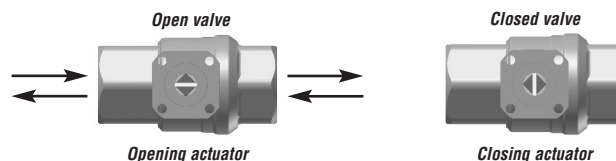

### 3-WAY diverter/mixer valve bodies

The 3-way version of **Diamant PRO** valves with **ISO 5211** connection is available with two different balls. In both cases, one of the holes is positioned on the common way, which is therefore always open.

#### MIXER VALVE BODY (3-HOLE BALL)

The mixing valve body is used to mix two fluids (e.g. in order to control the temperature and/or the flow). In a 3-hole ball valve, the second hole is positioned on one of the two inlets and the third hole is orthogonal to the second one: a 90° rotation is necessary in order to point it to the other inlet.

One of the features of ball valves with 3-hole ball is the possibility to close one of the inlets when the other one begins to open. For a short while, during the operating phase, all the three ways are communicating.

At the end of the operation, the valve is a diverter again, for all practical purposes; therefore, the use of the 3-way 3-hole diverter valve is advisable when the diverted ways can communicate.

This is generally the case of heating systems.

On the control rod there are two orthogonal **millings**, which indicate which way is **communicating with the common one**.


#### DIVERTER VALVE BODY (2-HOLE BALL)

In a **2-hole** ball, the first hole is positioned on one of the two inlets: a 180° rotation is necessary in order to point it to the other inlet.


One of the features of the ball valve with **2 holes** is the fact that one of the two inlets closes before the other one opens, so that the two ways never communicate.

The 3-way, **2-hole** diverter valve is necessary when the two diverted ways must never communicate. On the control rod there is an orthogonal **milling**, which indicates which way is **communicating with the common one**.

#### MIXER - 3-HOLE C = COMMON WAY

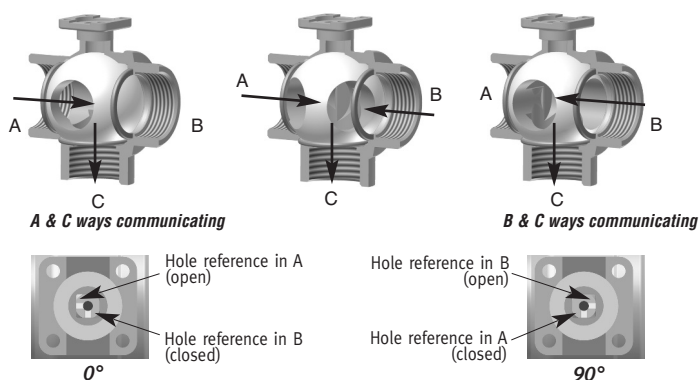


#### DIVERTER - 2-HOLE C = FLUID INLET

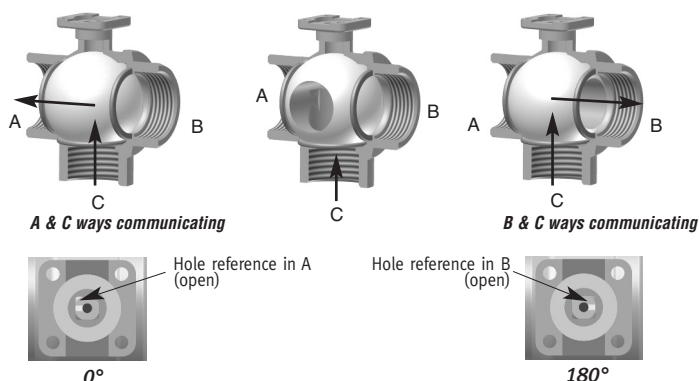


### 3-WAY valve bodies

#### "T" BALL

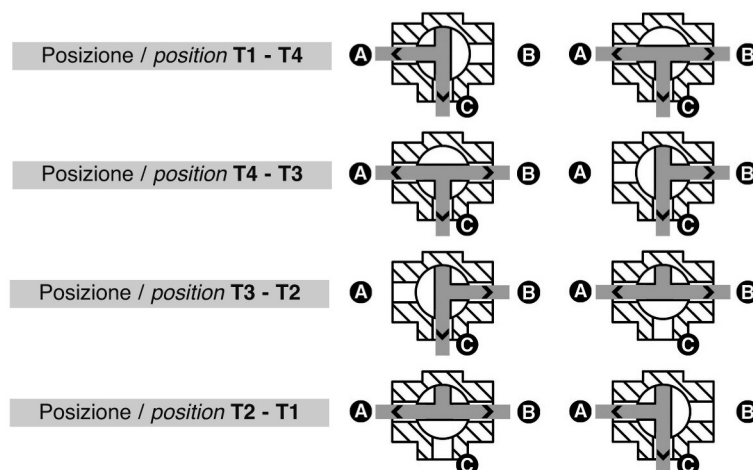

#### POSIZIONAMENTO SFERA BALL POSITIONING

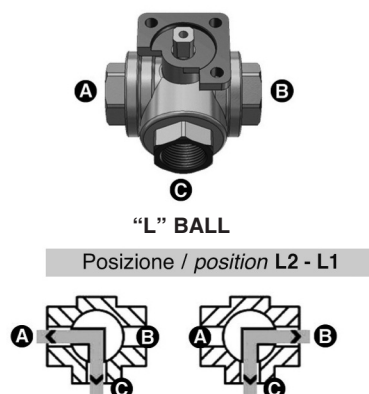

# Diamant PRO

## MOTORIZED VALVES

### PVC valve bodies

Both threaded and glue-on unions are available.

The ball cut-off ensures the best hydraulic tightness and reduced pressure loss.



2-WAY - FULL FLOW

TO BE GLUED	DN	16	20	25	32	40	50
THREADED	Ø	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"





3-WAY - FULL FLOW

TO BE GLUED	DN	16	20	25	32	40	50
THREADED	Ø	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"




**NOTES** Valve body with spacer, to be combined with the COMPARATO CONNECTION actuator.

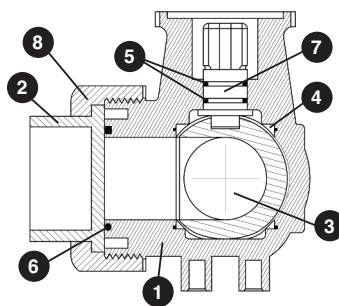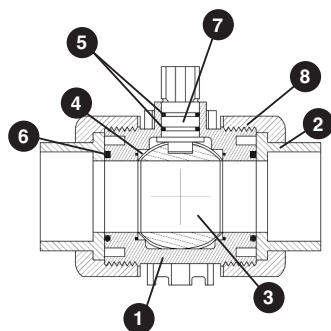

#### MATERIAL USED IN THE 2- AND 3-WAY PVC VALVE BODIES

1 BODY	PVCu
2 COUPLING	PVCu
3 BALL	PVCu
4 BALL SEAL	P.T.F.E
5 ROD SEAL	EPDM
6 SEAL	EPDM
7 CONTROL ROD	PVCu
8 COUPLING RING	PVCu

### Exploded view FOR THE ASSEMBLY OF SPACER-FITTED MOTORIZED VALVES

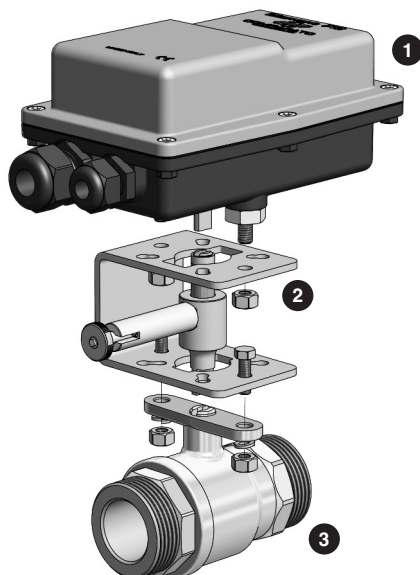

For the evaluation of the overall size of motorized valves, take into account the assembling diagram (next) and the dimensions of each single component, as shown in the following two pages.

When the installation does not require a spacer, directly couple the actuator to the valve; pay attention to couple actuators and valve bodies with the same type of connection ("**COMPARATO**" or "**ISO 5211** connection").

- 1 : Diamant PRO actuator
- 2 : Spacer/manual opening
- 3 : Ball valve


# Diamant *P20*

MOTORIZED VALVES

## OVERALL SIZE [mm]


## ACTUATOR MODEL WITH "COMPARATO" CONNECTION

## STANDARD MODEL

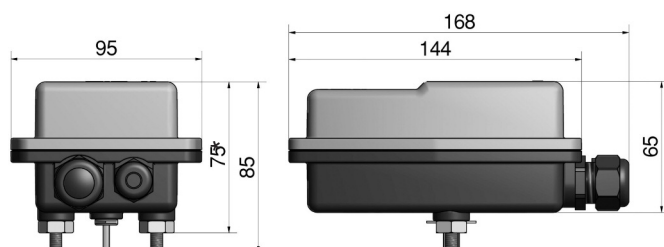


\* the size is to be taken into account when coupling the actuator to the valve body or the spacer

## MODEL WITH MANUAL OVERRIDE

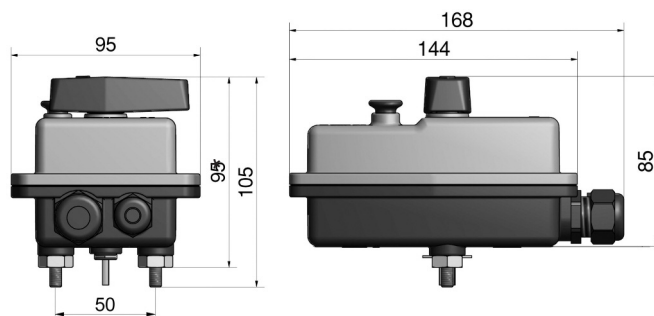


## ACTUATOR MODEL WITH ISO 5211 F03 / F05 CONNECTION


## STANDARD MODEL

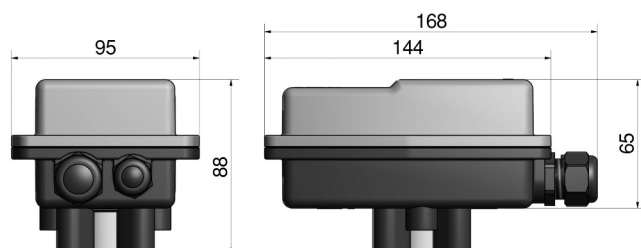

## MODEL WITH MANUAL OVERRIDE

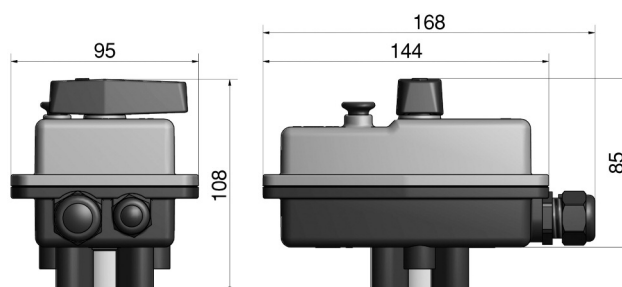

## OPTIONAL SPACERS FOR INSULATION AND/OR MANUAL OVERRIDE

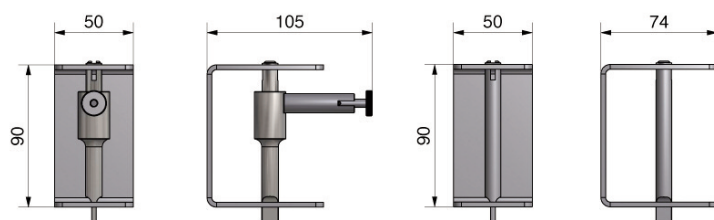

Disponibili anche nelle versioni:

- without control lever for manual override;
- for valve bodies with **ISO 5211** connection (sizes are similar to those of the versions shown).

## CORPI VALVOLA

VALVE BODY CONNECTION  
**COMPARATO**  
VALVE BODIES  
**BRASS**

MODEL	DN	Ø TANGS	Ø VALVE BODIES	A	B	C	D	E
 <b>2-Way</b>	15	1/2"	3/4"	34	48	133	78	
	20	3/4"	1"	38	58	145	84	
	25	1"	1"1/4	42	66	164	94	
 <b>3-Way Diverter / Mixer</b>	20	3/4"	1"	38	105	145	84	74
	25	1"	1"1/4	42	117	164	94	82



D - E: Dimensions refer to the valve body without tangs and caps.

# Diamant PRO

## MOTORIZED VALVES




VALVE BODY CONNECTION  
**COMPARATO**

VALVE BODIES  
**BRASS**

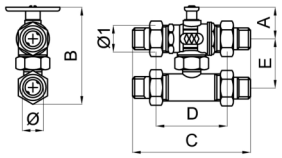
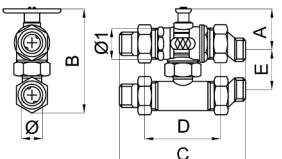
MODEL	DN	Ø TANGS	Ø VALVE BODIES	A	B	C	D	E
 <b>By-Pass</b>	20	3/4"	1"	38	119	145	84	70
	25	1"	1 1/4"	42	119	164	94	81
 <b>By-Pass and eccentric tangs</b>	20	3/4"	1"	from 15 to 27	119	145	84	from 58 to 82
	25	1"	1 1/4"	from 20 to 32	119	164	94	from 49 to 73

D: Dimension refers to the valve body without tangs and caps.



VALVE BODIES  
**BRASS**

MODEL	DN	Ø	A	B	C	D		
 <b>2-Way</b>	8	1/4"	33	50	67			
	10	3/8"	33	50	67			
	15	1/2"	33	50	67			
	20	3/4"	35	55	76			
	25	1"	46	71	90			
	32	1 1/4"	49	78	102			
 <b>3-Way Diverter / Mixer</b>	15	1/2"	31	65	64			
	20	3/4"	42	82	74			
	25	1"	45	92	89			
 <b>3-Way</b>	15	1/2"	33	52	77	39		
	20	3/4"	42	66	89	44		

VALVE BODIES  
**ISO 5211**

MODEL	DN	Ø	A	B	C	D		
 <b>2-Way</b>	15	1/2"	33	50	67			
	20	3/4"	35	56	78			
	25	1"	45	71	90			
 <b>3-Way</b>	8	1/4"	32	51	79	39		
	10	3/8"	32	51	79	39		
	15	1/2"	32	51	79	39		

VALVE BODIES  
**PVC**

MODEL	DN	Ø GLUE-ON mm	Ø THREADED	A	B	C	D	
 <b>2-Way</b>	10	16	3/8"	58	83	78		
	15	20	1/2"	58	83	78		
	20	25	3/4"	65	96	91		
	25	32	1"	74	109	106		
	32	40	1 1/4"	79	120	120		
	40	50	1 1/2"	87	137	142		
 <b>3-Way</b>	10	16	3/8"	28	57	118	59	
	15	20	1/2"	28	57	118	59	
	20	25	3/4"	34	68	148	74	
	25	32	1"	36	76	162	81	
	32	40	1 1/4"	43	90	192	96	
	40	50	1 1/2"	50	101	220	110	

**IMPORTANT:** In order to couple PVC valve bodies to the actuator, a spacer needs to be fit in.




# Diamant P20

## MOTORIZED VALVES

### FLUID-DYNAMIC FEATURES

$Kv_S$  [m³/h] (with  $\Delta p = 100\text{kPa} = 1\text{bar}$ )

MODEL	Ø	$Kv_S$	DN	PN
2-Way	1/2"	16,3	15	16
	3/4"	29,5	20	16
	1"	43	25	16
3-Way Diverter/Mixer	3/4"	11,5	20	16
	1"	18,3	25	16
3-Way with TEE by-pass	3/4"	29,5	20	16
	1"	43	25	16

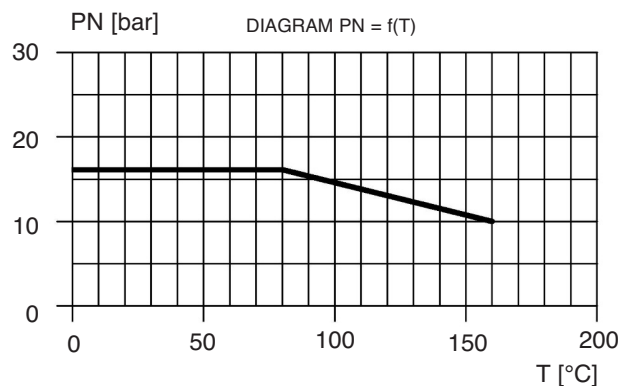

When the value of the flow is known, the general expression for the calculation of pressure losses is the following:

$$\Delta P [\text{bar}] = \left[ \frac{Q [\text{m}^3/\text{h}]}{Kv_S} \right]^2$$

The simplified expression provided applies to water or technically similar fluids.

**FLUIDS**      Water and EPDM & PTFE- compatible fluids • Other fluids on request

**TEMPERATURES**

- Minimum
- Maximum

Normal valve

-10°C  
+110°C


Valves with spacer

(for fluids compatible with mentioned temperatures)

-20°C  
+110°C

$Kv_S$  [m³/h] (with  $\Delta p = 100\text{kPa} = 1\text{bar}$ )

MODEL	Ø	$Kv_S$	DN	PN
2-Way ISO 5211	1/4"	5,4	--	40
	3/8"	6	10	40
	1/2"	16,3	15	40
	3/4"	29,5	20	40
	1"	43	25	40
3-Way Diverter/Mixer ISO 5211	1 1/4 *	89	32	40
	1/2"	6	15	25
	3/4"	11,5	20	16
3-Way ISO 5211	1"	18,3	25	16
	1/2"	3,9	15	30
	3/4" ***	7,9	20	30

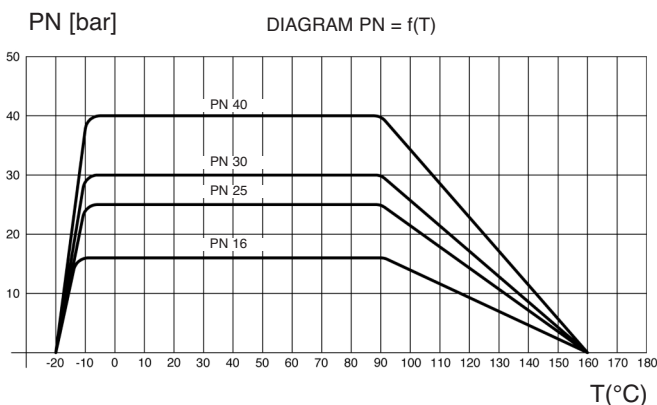

\* maximum differential pressure 25 bar

\*\* maximum differential pressure 10 bar

\*\*\* maximum differential pressure 16 bar

**FLUIDS**      Water and EPDM & PTFE- compatible fluids • Other fluids on request

**TEMPERATURES**

- Minimum
- Maximum

Normal valve

-10°C  
+110°C

Valves with spacer

(for fluids compatible with mentioned temperatures)

-20°C

see "Thermal solar systems"



COMPARATO NELLO SRL

UNI EN ISO 9001: CERTIFIED COMPANY 2015

# Diamant P20

## MOTORIZED VALVES


### FLUID-DYNAMIC FEATURES

VALVE BODIES  
**ISO 5211 connection**  
**AI SI 316**

$Kv_S$  [m³/h] (with  $\Delta p = 100\text{kPa} = 1\text{bar}$ )

MODEL	Ø	$Kv_S$	DN	PN
2-Way AI SI 316	1/2"	16,3	15	64
	3/4"	29,5	20	64
	1" *	43	25	64
3-Way AI SI 316	1/4"	2,8	--	64
	3/8"	3	10	64
	1/2" *	3,6	15	64

\* maximum differential pressure 25 bar

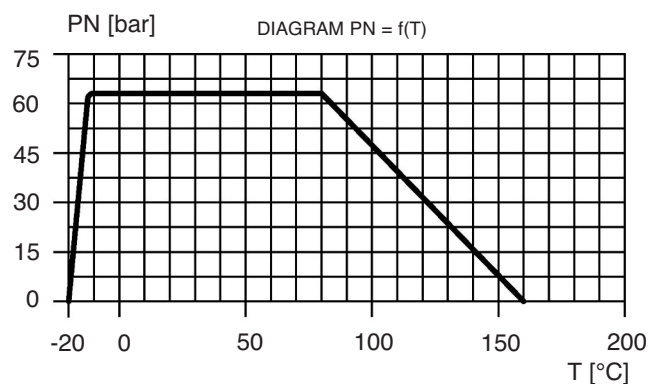

When the value of the flow is known, the general expression for the calculation of pressure losses is the following:

$$\Delta p [\text{bar}] = \left[ \frac{Q [\text{m}^3/\text{h}]}{k_{vs}} \right]^2$$

The simplified expression provided applies to water or technically similar fluids.

**FLUIDS**      Water and EPDM & PTFE- compatible fluids • Other fluids on request

**TEMPERATURES**


	Normal valve	Valves with spacer (for fluids compatible with mentioned temperatures)
• Minimum	-10°C	-20°C
• Maximum	+110°C	+160°C

$Kv_S$  [m³/h] (with  $\Delta p = 100\text{kPa} = 1\text{bar}$ )

MODEL	Ø	$Kv_S$	DN	PN
2-Way PVC	3/8"	4,8	10	16
	1/2"	12	15	16
	3/4"	23	20	16
	1"	46	25	16
	1"1/4	66	32	16
	1"1/2 *	105	40	16
3-Way PVC **	3/8"	1,5 ÷ 4,7	10	16
	1/2"	2,1 ÷ 11,7	15	16
	3/4"	5,7 ÷ 22,8	20	16
	1"	8,4 ÷ 45,6	25	16
	1"1/4	16,2 ÷ 63	32	16
	1"1/2 *	67	40	16

\* maximum differential pressure 10 bar

\*\* may vary according to the type of ball and its position

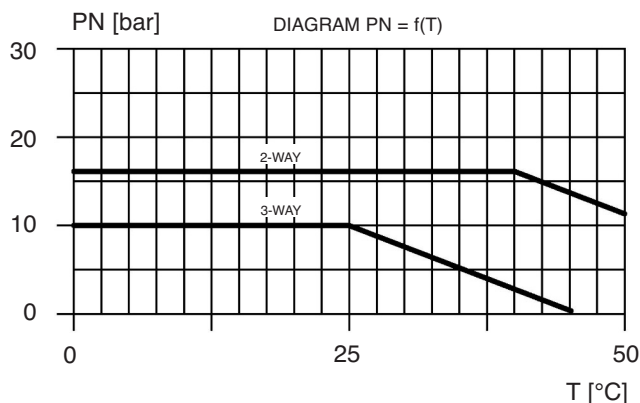

VALVE BODIES  
**PVC**

**FLUIDS**      Water and EPDM & PTFE- compatible fluids • Other fluids on request

**TEMPERATURES**

	2-WAY	3-WAY
• Minimum	0°C	0°C
• Maximum *	+60°C	+60°C

\* at nominal operating pressure



**COMPARATO NELLO SRL**

UNI EN ISO 9001: CERTIFIED COMPANY 2015

# Diamant *P20*

## MOTORIZED VALVES


### IMPIANTI SOLARI TERMICI

Thanks to the new techno-polymer they are made of, **Diamant P20** case and valve bodies fitted with special seals for high temperatures can be used in **THERMAL SOLAR SYSTEMS**, with a suitable spacer.

This configuration allows the water to flow at high temperatures (max. 160°C) \*.

In the specific instance, the maximum allowed temperatures are the following:

- 2 way valve body with ISO 5211 connection and spacer: T max = 160°C **a**
- 3 way valve body with ISO 5211 connection and spacer: T max = 160°C **b**
- diverter/mixer valve body with ISO 5211 connection and spacer: T max = 120°C **c**

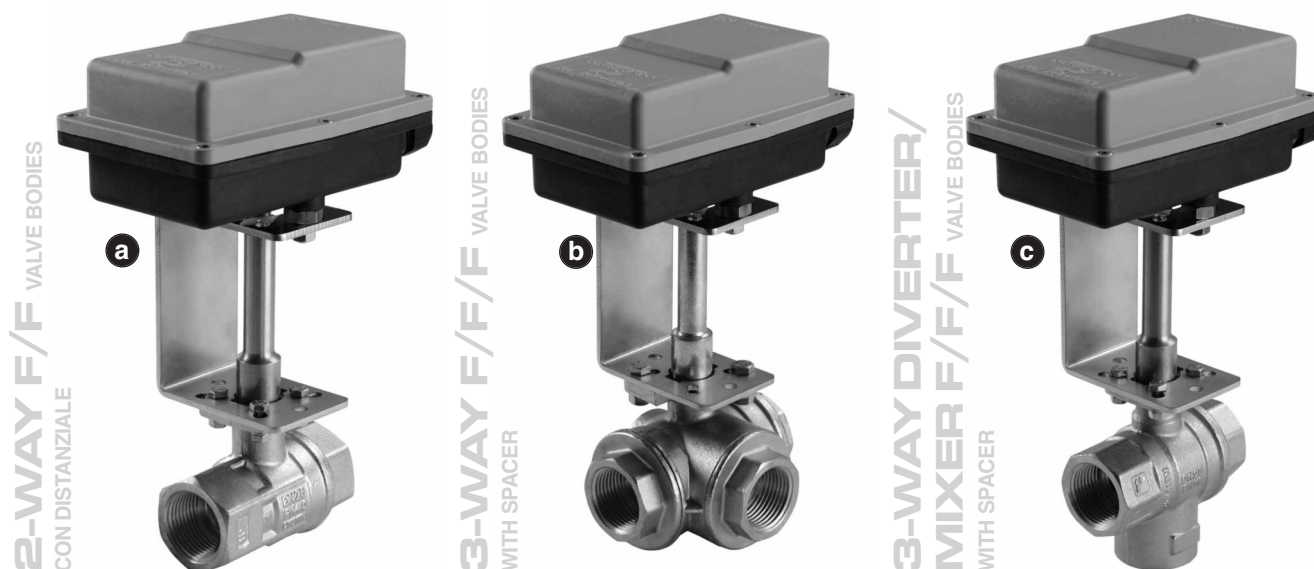


\* please contact our Technical Department for specific system information.

### GLOSSARY

- Operating torque: Torque which can be occasionally provided by the actuator, with no risk of breaks nor permanent deformation of the actuator components.
- $K_{VS}$ : Flow coefficient when the valve is completely open (2-way valve) or when the flow is completely deviated on a perpendicular (3-way valve).
- PN: Nominal operating pressure.
- $\Delta p$  max: Maximum differential operating pressure.

UPDATED DATA SHEETS AVAILABLE AT [www.comparato.com](http://www.comparato.com)



**HYDROTHERMAL SYSTEMS**  
**COMPARATO NELLO SRL**

17014 CAIRO MONTENOTTE (SV) ITALIA VIALE DELLA LIBERTÀ • LOCALITÀ FERRANIA • Tel. +39 019 510.371 - FAX +39 019 517.102

[www.comparato.com](http://www.comparato.com)

e-mail: [info@comparato.com](mailto:info@comparato.com)

UNI EN ISO 9001: CERTIFIED COMPANY 2015