
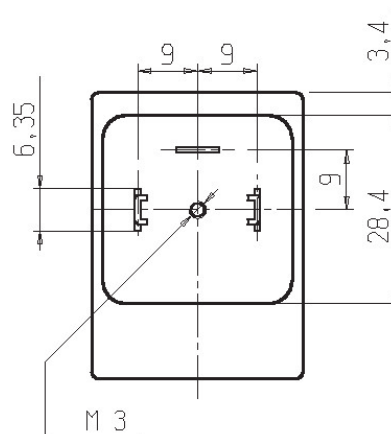


ASCO™ COIL

SPADE TERMINALS (DIN 46340)

SERIES
Z5

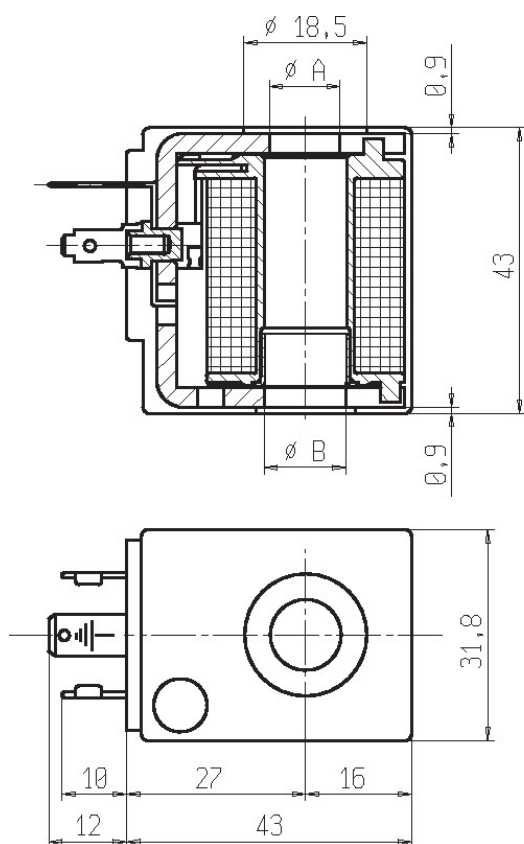

General Features

Complying with 2014/35/EU (LVD) and 2014/30/EU (EMC) directives.

Product in accordance with the RoHS 2 directive.
100% inspected.

Electric Connections

Spade terminals 6,3 x 0,8 (DIN46340), 2 line + 1 earth terminals.
3 poles plug connector (DIN 43650).

Encapsulation Materials

PET (polyethylene terephthalate) fiberglass reinforced; black colour.

Technical Features

Continuous Duty		ED 100%
Insulation class		Z530A : F (140°C) Z534A : H (165°C)
Ambient temperature		Z530A : -10°C +60°C Z534A : -10°C +80°C.
Protection degree		IP 65 (EN 60529) with plug connector
Voltages	DC	12-24V (+10% -5%)
	AC	24V/50Hz – 110V/50Hz (120V/60Hz) 230V/50Hz (+10% -15%)
		(Other voltages and frequencies on request)

Type	Power absorption		DC (W)	Holes		Notes	Weight (kg)
	AC (VA)			Ø A	Ø B		
Z530A	Inrush	Holding				-	
Z534A	23	14	9	10,7	12,35	1	0,200

Notes

1 - UL APPROVAL (E153691).

THE VALIDITY OF REPORTED DATA IS REFERRED TO THE DATE OF ISSUE. POSSIBLE UPDATES ARE AVAILABLE ON REQUEST

0909/1606