




IP65 range of watertight enclosures from 8 to 72M with smoked transparent door and equipped with screw wiring multipolar terminal blocks, 80 A and IP20. The main technical features are: reversible front and back panel, removable frames and panels with windows and detachable doors with up to 180° opening and lock accessory. The terminal blocks allow to create simple and neat wiring reducing the set-up time of the enclosure.

|                                      |                                                           |                           |                                              |
|--------------------------------------|-----------------------------------------------------------|---------------------------|----------------------------------------------|
| Insulation class                     | II (according to IEC 61140 standards)                     | Colour                    | Grey RAL 7035                                |
| Outer dim. LxHxD (mm)                | 298x420x140                                               | IP degree                 | IP65                                         |
| Dispersible power (W)                | 32                                                        | Mechanical resistance     | IK09                                         |
| Rated voltage                        | 400 V                                                     | Door colour               | Smoked Transparent                           |
| Terminal blocks                      | 80 A - IP20 bipolar holes with screws                     | No. of modules EN 50022   | 24 (12X2)                                    |
| Rated current                        | 125 A                                                     | Glow Wire Test            | 650 °C                                       |
| Operating temperature                | -25 +60 °C                                                | Type of material          | Halogen-free in compliance with EN 60754-2   |
| Electrocod                           | 0321                                                      | Thermo-pressure with ball | 70 °C                                        |
| Accessories for insulation restoring | Screwcaps (GW44623) or fixing brackets in resin (GW44621) | Standard                  | EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49 |
| Insulation voltage                   | 1000 V according to EN 62208 both in ac as well as in dc  | Pole 1 (mm²)              | N/E (3x16) + (11x10)                         |
| Pole 2 (mm²)                         | N/E (3x16) + (11x10)                                      |                           |                                              |

#### BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS



| Saline solution | Acids         |                    | Bases         |                    | Solvents           |               |               |                    | Mineral oil        | UV rays            |
|-----------------|---------------|--------------------|---------------|--------------------|--------------------|---------------|---------------|--------------------|--------------------|--------------------|
|                 | Concentrated  | Diluted            | Concentrated  | Diluted            | Hexane             | Benzol        | Acetone       | Alcohol            |                    |                    |
| Resistant       | Not resistant | Limited resistance | Not resistant | Limited resistance | Limited resistance | Not resistant | Not resistant | Limited resistance | Limited resistance | Limited resistance |

#### DIMENSIONAL

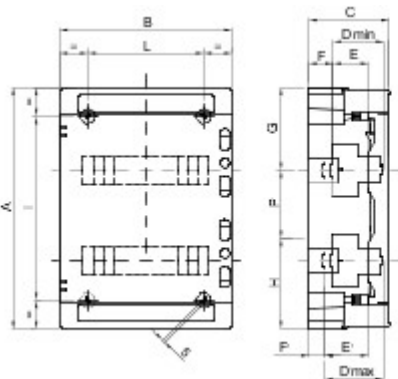

|     |           | A   | B   | C   | Dmin | E  | F  | G     | H     | P          | Dmax | E' | F' | NR | I   | L   |
|-----|-----------|-----|-----|-----|------|----|----|-------|-------|------------|------|----|----|----|-----|-----|
| 24M | GW 40 104 | 420 | 298 | 140 | 75   | 48 | 48 | 147,5 | 122,5 | 150        | 102  | 75 | 21 | 4  | 320 | 200 |
| 36M | GW 40 105 | 570 | 298 | 140 | 75   | 48 | 48 | 147,5 | 122,5 | 150        | 102  | 75 | 21 | 4  | 494 | 200 |
|     | GW 40 107 | 463 | 410 | 140 | 75   | 48 | 48 | 154   | 134   | 175        | 102  | 75 | 21 | 4  | 363 | 310 |
| 54M | GW 40 108 | 655 | 410 | 140 | 75   | 48 | 48 | 162,5 | 142,5 | 175        | 102  | 75 | 21 | 6  | 293 | 319 |
| 72M | GW 40 109 | 878 | 410 | 160 | 75   | 48 | 48 | 175   | 155   | 200<br>175 | 102  | 75 | 21 | 6  | 394 | 319 |

#### TECHNICAL SYMBOLOGY



#### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 29/05/2020

information purpose only, last update . They can be changed at any moment, therefore it is always recommended to read the last updated version published on the website [www.gewiss.com](http://www.gewiss.com). Lumen output and system power are subject to a tolerance of  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C. Terms of warranty at <https://www.gewiss.com/it/en/company/landingpage/led-warranty>.