

MINISTAT

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for the measurement of pressure and temperature.



Applications

- Railways
- Machine tools
- HVAC
- Refrigeration
- Process technology

Features

- Short response time
- Protection IP54
- Electrical connection on terminal screw

Technical Data

Designation of application	Remote sensing thermostat	Switching differential	Adjustable / not adjustable
Measuring range	-30°C ... +40°C to +70°C ... +350°C	Repeatability	± 0.5 % FS typ.
Output signal	Floating change-over contact	Approval / conformity	EN60730-1/ EN60730-2-9: Typ 2.B.H

01/2017

Data sheet H72172i

Subject to change

Ordering information/type code

					XXX	XX	XX	XXX	XX	XXXXXXXXXX	XX	XX
Custom build code	External adjustment				624							
	Internal adjustment				634							
Microswitch	Small switching differential, not adjustable				10							
	Average switching differential, not adjustable				11							
	With gold plated contacts, not adjustable				21							
	Adjustable large switching differential				24							
	Adjustable standard switching differential				25							
Range	Range [°C]	Sensor max. [°C]		Range [°C]	Sensor max. [°C]							
	-30 ... 40	45	01	-10 ... 80 ⁴⁾	85	95						
	-10 ... 25 ⁴⁾	60	07	5 ... 95	105	20						
	0 ... 35	70	09	20 ... 110 ⁴⁾	115	23						
	10 ... 45	85	11	20 ... 150	165	31						
	10 ... 80 ⁴⁾	100	13	20 ... 230	250	24						
	15 ... 30	60	17	40 ... 300 ⁴⁾	330	53						
	-10 ... 35	70	94	70 ... 350	380	54						
Sensor ¹⁾	Range	Sensor diameter [mm]	Sensor material		Range	Sensor diameter [mm]	Sensor material					
	24, 53, 54	Ø4.7	Stainless steel	111	01, 07, 09, 11, 13, 17	Ø4.7	Copper	412				
	24, 53, 54	Ø7	Stainless steel	121	01, 07, 09, 11, 13, 17	Ø7	Copper	422				
	24, 53, 54	Ø9	Stainless steel	131	01, 07, 09, 11, 13, 17	Ø9	Copper	432				
	94, 95, 20, 23, 31	Ø4.7	Stainless steel	311	24, 53, 54	Ø4.7	Copper nickel plated	113				
	94, 95, 20, 23, 31	Ø7	Stainless steel	321	24, 53, 54	Ø7	Copper nickel plated	123				
	94, 95, 20, 23, 31	Ø9	Stainless steel	331	24, 53, 54	Ø9	Copper nickel plated	133				
	01, 07, 09, 11, 13, 17	Ø7	Stainless steel	421	94, 95, 20, 23, 31	Ø4.7	Copper nickel plated	313				
	24, 53, 54	Ø4.7	Copper	112	94, 95, 20, 23, 31	Ø7	Copper nickel plated	323				
	24, 53, 54	Ø7	Copper	122	94, 95, 20, 23, 31	Ø9	Copper nickel plated	333				
	24, 53, 54	Ø9	Copper	132	01, 07, 09, 11, 13, 17	Ø4.7	Copper nickel plated	413				
	94, 95, 20, 23, 31	Ø4.7	Copper	312	01, 07, 09, 11, 13, 17	Ø7	Copper nickel plated	423				
	94, 95, 20, 23, 31	Ø7	Copper	322	01, 07, 09, 11, 13, 17	Ø9	Copper nickel plated	433				
	94, 95, 20, 23, 31	Ø9	Copper	332								
Fixing ²⁾	Nut M10 (for remote sensing version)							10				
	Captive nut (for direct mounting version)							14				
	Grubscrew locked, lateral (direct mounting version)							12				
	Console (for remote sensing version)							17				
	Grubscrew locked with thermal distance piece (for direct mounting version)							18				
	Console (for remote sensing version)							19				
Protection tube	See data sheet H72114/H72163									XXXX.XXXX		

	XXX	XX	XX	XXX	XX	XXXXXXXXXX	XX	XX
Accessories	Switchpoint locking ⁴⁾							15
	Switchpoint fixed and sealed upon customer's request ⁴⁾							88
	Switchpoint preset upon customer's request, no guarantee on switching accuracy ⁴⁾							83
	Switchpoint adjustment please indicate when ordering:							
	- Switchpoint [°C]							
	- Increasing or decreasing							
	Condensator over Pin 1-2							12
	Condensator over Pin 1-3							13
	Condensators over Pin 1-2 / 1-3							23
	Railway version (UIC 616)							28
	Outdoor application (vented)							44
	Cover with window							77
	Capillary tube protection: Flexible metal tube, brass nickel plated							90
	Capillary tube protection: Flexible metal tube 1.4541/V2A							91
	Capillary tube protection: PVC tube							92
Capillary tube length	Capillary tube length up to 5000 mm (no specification required for direct mounting on protection tube) L=XXXX ³⁾							

¹⁾ See data sheet H72114/H72163

²⁾ See data sheet H72106

³⁾ Overlengths upon request


⁴⁾ Only with type 634 internal adjustment

Standard products (extra short lead time)					
Product No.	Type Code	Sensor material	Temperature range [°C]	Switching differential [°C]	Sensor max. [°C]
M35	624 2509 422 19	Copper	0 ... +35	0.7 ... 10 (adjustable)	70
M40	624 2501 422 19	Copper	-30 ... +40	0.7 ... 10 (adjustable)	45
M95	624 2520 322 19	Copper	+5 ... +95	2 ... 12 (adjustable)	105
M150	624 2531 322 19	Copper	+20 ... +150	2.5 ... 16 (adjustable)	165
M230S	624 2524 121 19	1.4435/316L	+20 ... +230	3 ... 32 (adjustable)	250
M350S	624 2554 121 19	1.4435/316L	+70 ... +350	4 ... 40 (adjustable)	380
MS35	634 2509 422 19	Copper	0 ... +35	0.7 ... 10 (adjustable)	70
MS40	634 2501 422 19	Copper	-30 ... +40	0.7 ... 10 (adjustable)	45
MS95	634 2520 322 19	Copper	+5 ... +95	2 ... 12 (adjustable)	105
MS150	634 2531 322 19	Copper	+20 ... +150	2.5 ... 16 (adjustable)	165
MS230S	634 2524 121 19	1.4435/316L	+20 ... +230	3 ... 32 (adjustable)	250
MS350S	634 2554 121 19	1.4435/316L	+70 ... +350	4 ... 40 (adjustable)	380


Specifications		
Accuracy	Repeatability	$\pm 0.5\%$ FS typ.
	Scale accuracy typ.	$\pm 2\%$ FS typ.
	Switching differential	see table
	Switching point	Temperature compensated with bimetal switch lever
Environmental conditions	Ambient temperature	Range $\leq +45^{\circ}\text{C}$: $-30\ldots+50^{\circ}\text{C}$ Range $+45\ldots+250^{\circ}\text{C}$: $-30\ldots+70^{\circ}\text{C}$ Range $> +250^{\circ}\text{C}$: $-10\ldots+70^{\circ}\text{C}$ (Important: Temperature at sensor may not exceed maximum sensor temperature)
	Storage temperature	Range $\leq +45^{\circ}\text{C}$: $-30\ldots+50^{\circ}\text{C}$ Range $> +45^{\circ}\text{C}$: $-30\ldots+85^{\circ}\text{C}$
	Protection	IP54
	Humidity	Max. 95 % relative
Mechanical Data	Sensor housing	See ordering information
	Filling	Liquid
	Housing	PC/ABS-Blend V0
	Screwed cable gland	PA, Polyamid
	Installation	Any position
	Weight	$\sim 380\text{ g}$
Microswitch	Rating	See table
	Resistance of insulation	$> 2\text{ M}\Omega$
	Dielectric strength	$U \leq 250\text{V}$: 1.45 kV $U \leq 500\text{V}$: 2 kV terminal ground
	Life time (mechanical)	Microswitch 10/11/25: 20 Mio. cycles Microswitch 21: 0.5 Mio. cycles Microswitch 24: 0.3 Mio. cycles
Electrical connection	Cable gland	M16x1.5 Cable- $\varnothing$ 4...9 mm
	Terminal screw	$3 \times 1\ldots2.5\text{ mm}^2$

Additional information		
Documents	Data sheet	www.trafag.com/H72172
	Instructions	www.trafag.com/H73624
	Flyer	www.trafag.com/H70954


Dimensions

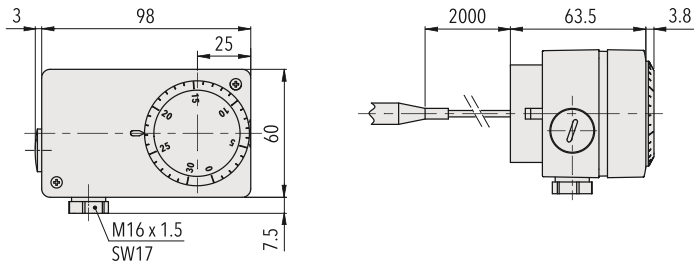

624.XXXX.XXX.XX...

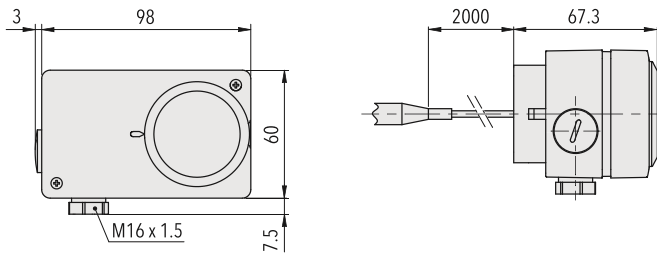

634.XXXX.XXX.XX...



6X4.XXXX.XXX.19...


Switching differential typ.

Range	[°C]	-30 ... +40 -10 ... +25 0 ... +35 +15 ... +30 +10 ... +45 +10 ... +80	-10 ... +35 -10 ... +80 +5 ... +95 +20 ... +110	+20 ... +150	+20 ... +230	+40 ... +300 +70 ... +350
Microswitch 10 Switching differential (fixed value, not adjustable)	[°C]	0.3	0.8	1	1.2	2
Microswitch 11/21 Switching differential (fixed value, not adjustable)	[°C]	0.7	2	2.5	3	4
Microswitch 24 Switching differential (adjustable value)	[°C]	4 ... 21	5.5 ... 26	7 ... 34	15 ... 65	18 ... 84
Microswitch 25 Switching differential (adjustable value)	[°C]	0.7 ... 10	2 ... 12	2.5 ... 16	3 ... 32	4 ... 40


Electrical data switch

		Rating Resistive Load (Inductive Load)	
Type	Features	AC	DC
10	Small switching differential, not adjustable	125 V, 10 (1.5) A 250 V, 10 (1.25) A	250 V, 0.2 (0.02) A 125 V, 0.4 (0.03) A 30 V, 2 (1) A 14 V, 15 (2.5) A
11	Average switching differential, not adjustable	125 V, 15 (1.5) A 250 V, 15 (1.25) A 500 V, 10 (0.75) A	250 V, 0.25 (0.03) A 125 V, 0.5 (0.05) A 30 V, 6 (1.5) A 14 V, 15 (1.5) A
21	Gold plated contacts, not adjustable	24 V, 0.1 (0.1) A 12 V, 1 (1) A 5 V, 2 (2) A	24 V, 0.1 (0.1) A 12 V, 1 (1) A 5 V, 2 (2) A
25	Adjustable standard switching differential	125 V, 15 (1.5) A 250 V, 15 (1.25) A 500 V, 10 (0.75) A	250 V, 0.25 (0.03) A 125 V, 0.5 (0.05) A 30 V, 6 (1.5) A 14 V, 15 (2.5) A
24	Adjustable large switching differential	125 V, 15 (1.5) A 250 V, 15 (1.25) A 500 V, 10 (0.75) A	250 V, 0.3 (0.2) A 125 V, 0.75 (0.4) A 30 V, 15 (1.5) A 14 V, 15 (1.5) A

Electrical Connection



624/634



with accessory 23