



Current/voltage measuring module V2; Set current 0.3 ... 4 A, Voltage measurement up to 690 V, Overall width 45 mm, Straight-through transformer, basic unit required pro V PB, pro V MR, pro V PN or pro V EIP

**product brand name**

SIRIUS

**product designation**

Current/voltage measuring module

### General technical data

#### product function

- current measurement
- voltage measurement
- active power measurement
- power measurement
- frequency measurement

Yes

Yes

Yes

Yes

Yes

#### measuring procedure for current measurement

TRMS

#### current measuring range extension with external current transformers

Yes

#### measuring procedure for voltage measurement

TRMS

#### measurable supply voltage between the line conductors at AC maximum rated value

690 V

#### line conductors and neutral conductors internal resistance for voltage measurement

1 MΩ; RC-based voltage divider

#### product component

- input for thermistor connection

No

#### consumed active power

0.5 W

#### insulation voltage

- with degree of pollution 3 at AC rated value
- for wires of main circuit according to IEC 60947-1 rated value

690 V

6 kV

#### surge voltage resistance rated value

6 000 V

#### protection class IP

IP20

#### shock resistance according to IEC 60068-2-27

15g / 11 ms; with basic unit snapped on

#### vibration resistance

1-6 Hz / 15 mm; 6-500 Hz / 2 g; with basic unit snapped on: 1g

#### reference code according to IEC 81346-2

F

#### Substance Prohibitance (Date)

05/28/2009

#### certificate of suitability

- according to ATEX directive 2014/34/EU
- according to UKCA

BVS 06 ATEX F001

ITS21UKEX0464

#### explosion device group and category according to ATEX directive 2014/34/EU

II (2) G, II (2) D, I (M2)

### Electromagnetic compatibility

#### EMC emitted interference according to IEC 60947-1

class A

#### EMC immunity according to IEC 60947-1

corresponds to degree of severity 3

#### conducted interference

- due to burst according to IEC 61000-4-4
- due to conductor-earth surge according to IEC 61000-4-5
- due to conductor-conductor surge according to IEC

2 kV

2 kV

1 kV

61000-4-5	
field-based interference according to IEC 61000-4-3	10 V/m
<b>Inputs/ Outputs</b>	
number of outputs as contact-affected switching element	0
<b>Protective and monitoring functions</b>	
product function	
• power factor monitoring	Yes
• ground-fault monitoring	Yes
• voltage detection	Yes
trip class	CLASS 5E
product function	
• current detection	Yes
• overload protection	Yes
<b>Precision</b>	
measuring precision	
• of frequency measurement	+/- 1.5 %, 0.25 A ... 8 A, 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), cos phi (0.5...1), 50/60 Hz, 25 °C
• for current measurement 1	+/- 1.5 %, in range 0.25 A ... 8 A, in range 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), 50/60 Hz, 25 °C
• for current measurement 2	+/- 3%, in range 8 A ... 32 A, in range 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), 50/60 Hz, 25 °C
• for voltage measurement 1	+/- 1.5 %, in range 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), 50/60 Hz, 25 °C
• at cos phi-measurement 1	+/- 1.5 %, 0.4 A ... 8 A, 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), cos phi (0.5...1), 50/60 Hz, 25 °C
• at cos phi-measurement 2	+/- 5%, 8 A ... 32 A, 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), cos-phi (0.5...1), 50/60 Hz, 25 °C
• at active power measurement 1	+/- 5 %, 0.25 ... 8 A, 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), cos phi (0.5...1), 50/60 Hz, 25 °C
• at active power measurement 2	+/- 10%, 8 A ... 32 A, 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), cos-phi (0.5...1), 50/60 Hz, 25 °C
• at energy measurement 1	+/- 5 %, 0.25 ... 8 A, 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), cos phi (0.5...1), 50/60 Hz, 25 °C
• at energy measurement 2	+/- 10%, 8 A ... 32 A, 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), cos-phi (0.5...1), 50/60 Hz, 25 °C
• at apparent power measurement 1	+/- 3%, 0.25 A ... 8 A, 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), cos-phi (0.5...1), 50/60 Hz, 25 °C
• at apparent power measurement 2	+/- 5 %, 8 A ... 32 A, 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), cos phi (0.5...1), 50/60 Hz, 25 °C
accuracy of ground-fault monitoring	In the range 30 % .. 120 %/Is: +/- 10 % (Class CI-A), in range 15 % .. 30 % Ie: +/- 25 % (Class CI-B), both values acc. to IEC 60947-1 Annex T
temperature drift per °C	0.02 %/°C; Reference temperature: 25°C
measured variable frequency	45 ... 65 Hz
<b>Installation/ mounting/ dimensions</b>	
mounting position	any
fastening method	screw and snap-on mounting
height	84 mm
width	45 mm
depth	64 mm
required spacing	
• top	30 mm
• bottom	30 mm
• left	0 mm
• right	0 mm
diameter of inlet opening	7.5 mm
diameter of inlet opening for current measurement	7.5 mm
<b>Connections/ Terminals</b>	
type of electrical connection at the measurement inputs for voltage	screw-type terminals
type of connectable conductor cross-sections at the measurement inputs for voltage	
• finely stranded with core end processing	1x (0.25 ... 2.5 mm²), 2x (0.25 ... 1.0 mm²)
• solid	1x (0.25 ... 2.5 mm²), 2x (0.25 ... 1.0 mm²)
• at AWG cables solid	1x (24 ... 14), 2x (24 ... 18)
• at AWG cables stranded	1x (20 ... 14), 2x (20 ... 16)

tightening torque at the measurement inputs for voltage	0.5 ... 0.6 N·m
tightening torque [lbf·in] at the measurement inputs for voltage	4.4 ... 5.3 lbf·in

#### Ambient conditions

<b>installation altitude at height above sea level</b> <ul style="list-style-type: none"> <li>• 1 maximum</li> <li>• 2 maximum</li> <li>• 3 maximum</li> </ul>	2 000 m 3 000 m; max. +50 °C (no protective separation) 4 000 m; max. +40 °C (no protective separation)
<b>ambient temperature</b> <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> <li>• during transport</li> </ul>	-25 ... +60 °C -40 ... +80 °C -40 ... +80 °C
<b>environmental category</b> <ul style="list-style-type: none"> <li>• during operation according to IEC 60721</li> <li>• during storage according to IEC 60721</li> <li>• during transport according to IEC 60721</li> </ul> relative humidity during operation	3K6 (no formation of ice, no condensation, relative humidity 10 ... 95%), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (no condensation, relative humidity 10 ... 95%), 1C2 (no salt mist), 1S2 (sand must not get into the devices), 1M4 2K2, 2C1, 2S1, 2M2 10 ... 95 %

#### Short-circuit protection

product function short circuit protection	No
-------------------------------------------	----

#### Galvanic isolation

(electrically) protective separation according to IEC 60947-1	All circuits with protective separation (double creepage paths and clearances), the information in the "Protective Separation" test report, No. A0258, must be observed (link see further information)
---------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

#### Main circuit

number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	0.3 ... 4 A
operating voltage	
<ul style="list-style-type: none"> <li>• at AC</li> </ul>	
<ul style="list-style-type: none"> <li>— at 50 Hz rated value</li> <li>— at 60 Hz rated value</li> </ul>	110 ... 690 V 110 ... 690 V
operating frequency rated value	50 ... 60 Hz

#### Control circuit/ Control

type of voltage	AC
inrush current maximum	40 A; 10 x I <sub>o</sub>

#### Certificates/ approvals

General Product Approval	EMC
--------------------------	-----



[Confirmation](#)



#### For use in hazardous locations

#### Declaration of Conformity



#### Test Certificates

#### Marine / Shipping

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

[Special Test Certificate](#)





[Confirmation](#)[PROFINET-Certification](#)

Profibus

#### Further information

**Information on the packaging**<https://support.industry.siemens.com/cs/ww/en/view/109813875>**Information- and Downloadcenter (Catalogs, Brochures,...)**<https://www.siemens.com/ic10>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7110-1AA01-0>**Cax online generator**<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7110-1AA01-0>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/3UF7110-1AA01-0>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3UF7110-1AA01-0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7110-1AA01-0&lang=en)**Test report No. A0258, protective separation**<https://support.industry.siemens.com/cs/ww/en/view/109748152>

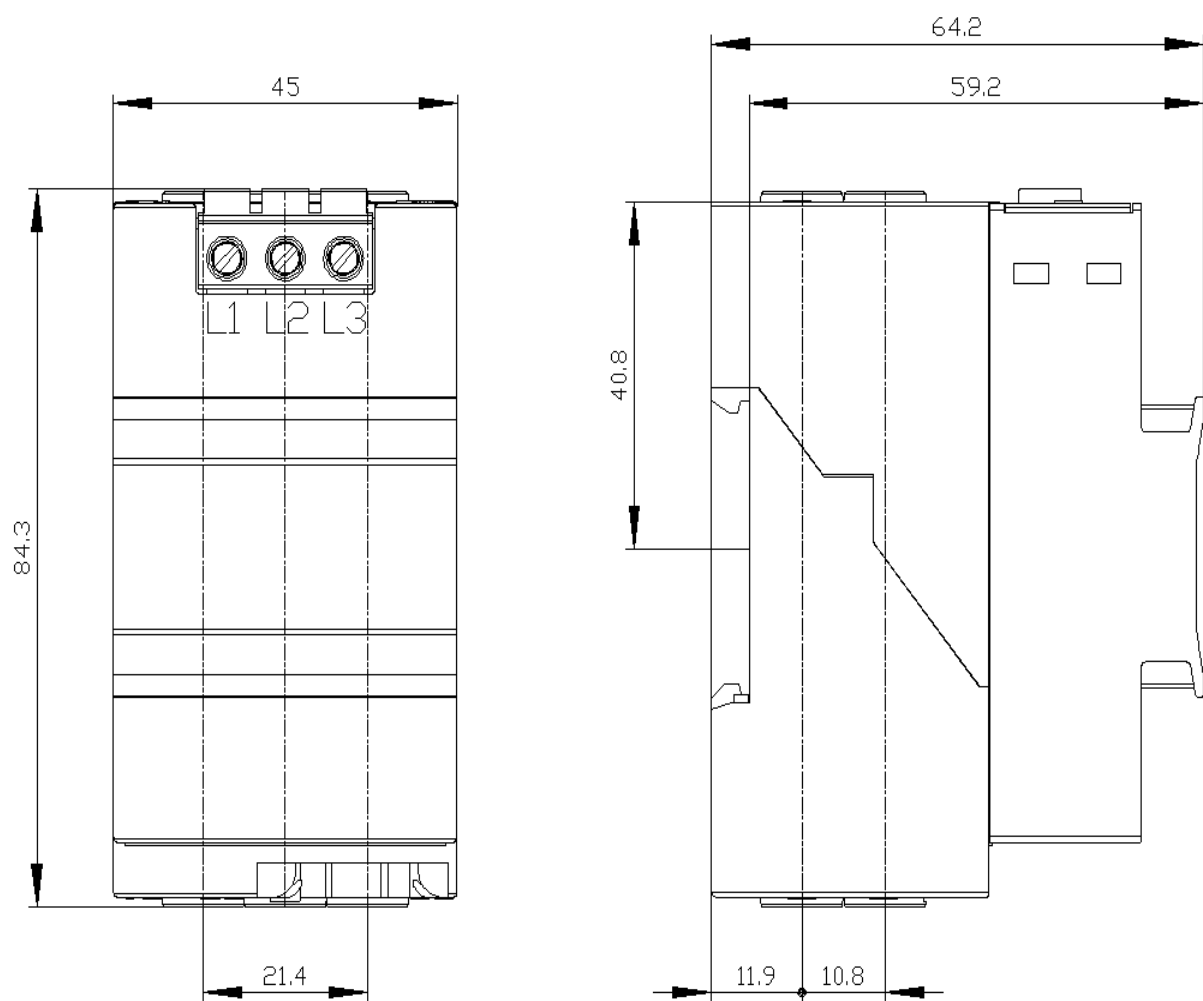

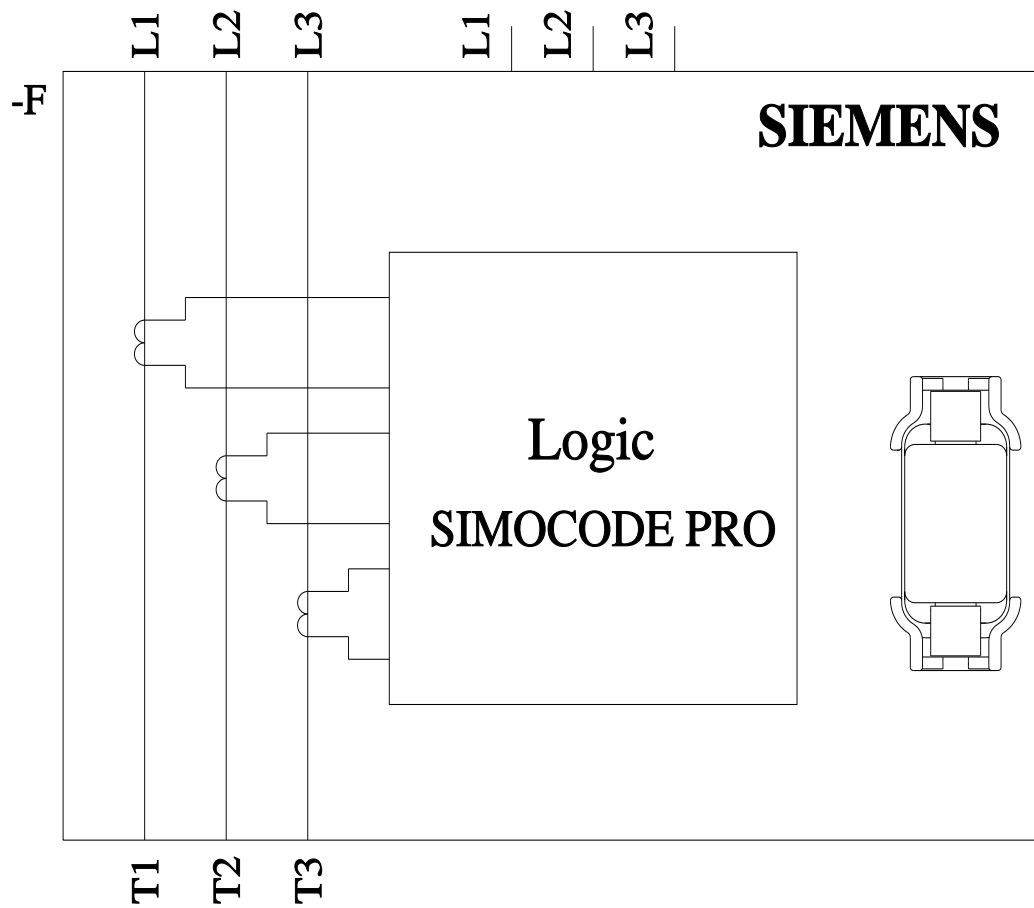

last modified:

7/15/2022 [🔗](#)