


SIEMENS

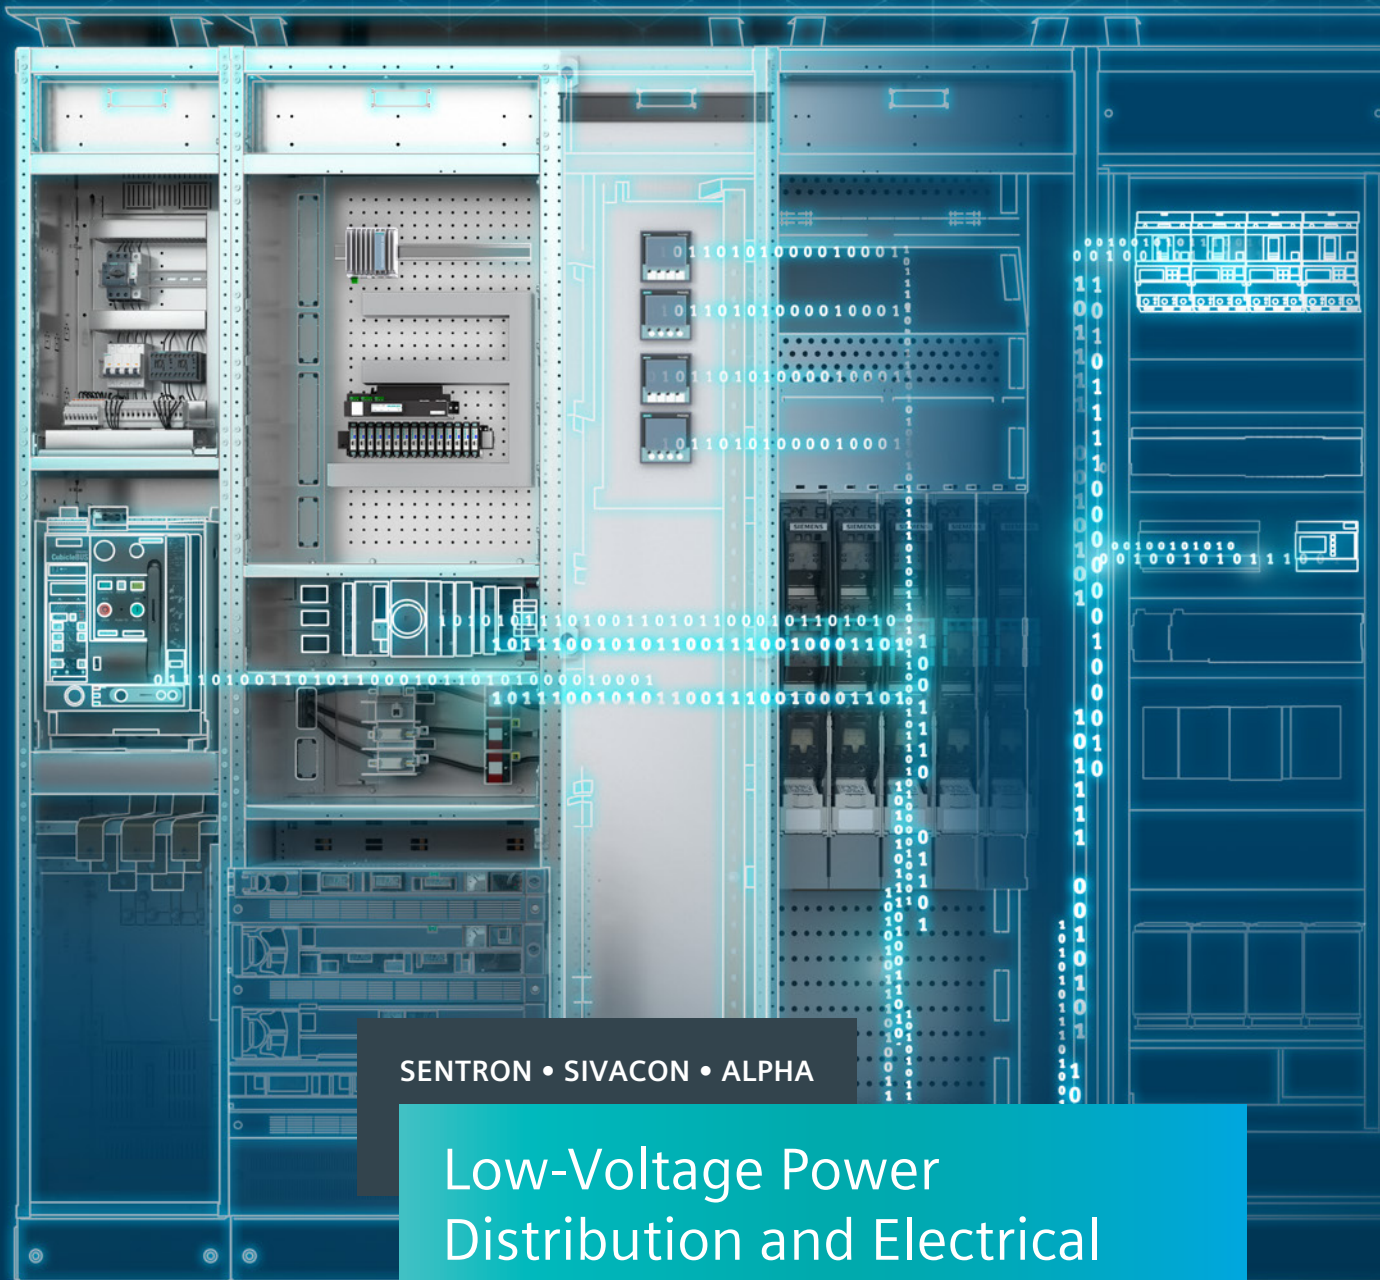

SETRON • SIVACON • ALPHA

Low-Voltage Power Distribution and Electrical Installation Technology

Switching Devices

Catalog
Extract
LV 10

Edition
04/2020

[siemens.com/lowvoltage](https://www.siemens.com/lowvoltage)

Making sure power makes its way

Consistent, safe and intelligent low-voltage power distribution and electrical installation technology

Whether industries, infrastructures or buildings: Each environment depends on a reliable power supply.

Which is why products and systems featuring maximum safety and optimum efficiency are in demand. This comprehensive portfolio for low-voltage power distribution and electrical installation technology covers every requirement – from the switchboard to the socket outlet.

We are there when you need us

Your personal contact can be found at
www.siemens.com/lowvoltage/contact

Catalog LV 10 · 04/2020

You will find the latest edition and all future editions in the Siemens Industry Online Support at
www.siemens.com/lowvoltage/catalogs

Refer to the Industry Mall for current prices
www.siemens.com/industrymall

The products and systems listed in this catalog are developed and manufactured using a certified quality management system in accordance with DIN EN ISO 9001:2008.

Technical data

The technical specifications are for general information purposes only. Always heed the operating instructions and notices on individual products during assembly, operation and maintenance.

All illustrations are not binding.

Low-Voltage Power Distribution and Electrical Installation Technology

	Introduction	1/2	I
Protecting	Air Circuit Breakers	1/1	1
	Molded Case Circuit Breakers	2/1	2
	Miniature Circuit Breakers	3/1	3
	Residual Current Protective Devices / Arc Fault Detection Devices (AFDDs)	4/1	4
	Switching Devices	5/1	5
	Overvoltage Protection Devices	6/1	6
	Fuse Systems	7/1	7
Protecting, Switching and Isolating	Switch Disconnectors	8/1	8
Switching and Isolating	Transfer Switching Equipment and Load Transfer Switches	9/1	9
Measuring and Monitoring	Measuring Devices, Power Monitoring and Digitalization Solutions	10/1	10
	Monitoring Devices	11/1	11
Distribution	Transformers, Power Supply Units and Socket Outlets	12/1	12
	Busbar Systems	13/1	13
	Terminal Blocks	14/1	14
	Power Distribution Boards, Motor Control Centers and Distribution Boards	15/1	15
	Busbar Trunking Systems	16/1	16
	System Cubicles, System Lighting and System Air-Conditioning	17/1	17
	Appendix	A/1	A



Electrical switching – on the safe side

Control and automatic functions always employ electrical switching.

Remote control switches for pulse controls, switching relays, or Insta contactors switch electrical loads.

Our low-voltage circuit protection technology offers a wide variety of contact versions and rated currents for the different requirements of these devices.

Safety, convenience and energy savings – these characterize automatic switching.

Switching Devices



All the information you need	5/2
System overview	5/4
Installation switching devices	5/6
5TE8 control switches	5/6
5TE48 pushbuttons	5/8
5TE58 light indicators	5/10
5TE81/82 On/Off switches	5/12
5TL1 On/Off switches	5/14
5TE DC isolator	5/16
5TE busbars	5/18
5TT41 remote control switches	5/20
5TT44 remote control switches	5/24
5TT4 auxiliary switches	5/26
5TT42 switching relays	5/28
5TT50 Insta contactors	5/30
5TT58 Insta contactors	5/32
5TT5 auxiliary switches	5/34
5TT3 soft-starting devices	5/35
Timers	5/36
7LF4 digital time switches	5/36
7LF5 mechanical time switches	5/42
7LF6 timers for buildings new	5/46
5TT3 timers for industrial applications	5/47

A multitude of additional information ...

Information + ordering

All the important things at a glance

Information to get you started

For information about switching devices, please visit our website

www.siemens.com/switching-devices

Contact persons in your region

We are there when you need us

You can find your local contacts at

www.siemens.com/lowvoltage/contact

Your product in detail

The relevant tender specifications can be found at

www.siemens.com/lowvoltage/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products www.siemens.com/conversion-tool

Everything you need for your order

Refer to the Industry Mall for an overview of your products

- Switching devices sie.ag/2m4eG5M

Direct forwarding to the individual products in the Industry Mall by clicking on the Article No. in the catalog or by entering this web address incl. Article No.

www.siemens.com/product?Article No.

... can be found in our online services

Commissioning + operation

Your product in detail

The Siemens Industry Online Support portal provides detailed technical information

www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Engineering data for CAD or CAE systems are available in the CAx Download Manager at

www.siemens.com/lowvoltage/cax

Manuals

Manuals are available for downloading in Siemens Industry Online Support at

www.siemens.com/lowvoltage/manuals

- Configuration manual – Switching devices (45315361)

The fast track to the experts

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at www.siemens.com/lowvoltage/support-request

We offer a comprehensive portfolio of services.

You can find your local contacts at

www.siemens.com/lowvoltage/contact

You can find further information on services at

www.siemens.com/service-catalog

Technical overview – Switching devices



The fast way to get you to our online services

This page provides you with comprehensive information and links on switching devices

www.siemens.com/lowvoltage/product-support (109769083)

System overview

Basic units and accessories

Installation switching devices



5TE8
control switches



5TE48
pushbuttons




5TE58
light indicators



5TE81/82, 5TL1
On/Off switches, 5TE2



5TE
DC isolators



5TE
busbars



5TT41, 5TT44
remote control
switches



5TT4, 5TT5
auxiliary switches



5TT42
switching relays



5TT50, 5TT58
Insta contactors



5TT3
soft-starting devices

Accessories



Auxiliary switches
(AS)



Shunt trips
(ST)



Undervoltage
releases (UR)



Handle locking
devices



LEDs



Caps/covers



Connectors

Timers



7LF4 digital
time switches



7LF5 mechanical
time switches



7LF6 timers for
buildings **new**



5TT3 timers for
industrial applications

Accessories



Holders

Note:

You will find a detailed range of accessories with the basic units.

5TE8 control switches

	Control switches	Two-way switches	Group switches with center position
Rated operational current I_e per conducting path	20 A	20 A	20 A
Rigid conductor cross-section	1 ... 6 mm ²	1 ... 6 mm ²	1 ... 6 mm ²
Flexible conductor cross-section, with end sleeve	1 ... 6 mm ²	1 ... 6 mm ²	1 ... 6 mm ²
			

Contacts	U _e AC	Mounting width	Auxiliary switches		Auxiliary switches		Auxiliary switches
			Cannot be retrofitted	Mounted	Cannot be retrofitted	Mounted	Cannot be retrofitted
1 NO	48 V	1 MW	5TE8101-3	–	–	–	–
	230 V	1 MW	5TE8101	–	–	–	–
2 NO	400 V	1 MW	5TE8102	–	–	–	–
		1.5 MW	–	5TE8108	–	–	–
3 NO	400 V	1 MW	5TE8103	–	–	–	–
1 NO + 1 NC	400 V	1 MW	–	–	–	5TE8151	–
2 NO + 2 NC	400 V	1 MW	–	–	5TE8152	–	–
3 NO + 1 NC	400 V	1 MW	–	–	5TE8153	–	–
1 CO	230 V	1 MW	–	–	5TE8161	–	–
2 CO	400 V	1 MW	–	–	5TE8162	–	–
1 toggle switch	230 V	1 MW	–	–	–	–	5TE8141
2 toggle switches	400 V	1 MW	–	–	–	–	5TE8142

Further technical specifications

5TE8

Standards		
Standards	IEC/EN 60947-3 (VDE 0660-107), IEC/EN 60669-1 (VDE 0632-1)	
Approvals	IEC/EN 60947-3 (VDE 0660-107), GB14048.3-2008 CCC	
Supply		
Rated power dissipation P _v	Per pole 0.7 VA	
Contacts		
Minimum contact load	10 V; 300 mA	
Rated making/rated breaking capacity	At p.f. = 0.65 60 A / 60 A	
Rated short-time withstand current I _{cw} per conducting path at p.f. = 0.7	Up to 0.2 s	650 A
	Up to 0.5 s	400 A
	Up to 1 s	290 A
	Up to 3 s	170 A
Thermal rated current I _{th}	20 A	
Electrical/mechanical service life	Actuations 10000 / 25000	
Safety		
Clearances	Open contacts	2x >2 mm
	Between the poles	>7 mm
Creepage distances	>7 mm	
Sealable switch position	Yes	
Separate handle locking device	Yes	
Rated short-circuit making capacity I _{cm}	10 kA	
Rated impulse withstand voltage U _{imp}	>5 kV	
Connections		
Terminals	± Screw (Pozidriv)	PZ 1
	Max. tightening torque	0.8 ... 1.0 Nm
Environmental conditions		
Permissible ambient temperature	–5 ... +40 °C	
Resistance to climate at 95% relative humidity	Acc. to DIN 50015 45 °C	

Accessories

Auxiliary switches (AS)



- For right-hand-side retrofitting with factory-fitted brackets

Contacts	Version	Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Handle locking device



- To prevent undesired mechanical On/Off switching
- Sealable
- For padlock with max. 3 mm shackle

Article No.
5ST3801

Spacer



- Contour for modular devices with a mounting depth of 70 mm
- Can be snapped onto either side of the busbar for convenient cable routing
- Spacer is recommended for better heat dissipation

Article No.
5TG8240

Set of mixed caps






- For manual changing of the luminous plates for the control switches

Article No.
5TG8068

5TE48 pushbuttons

With/without LED

	Pushbuttons without maintained-contact function	Pushbuttons with maintained-contact function	Control pushbuttons with maintained-contact function or momentary-contact function
	Without LED	Without LED	With LED
Rated operational current I_e per conducting path	20 A	20 A	20 A
Rigid/flexible conductor cross-section	1 ... 6 mm ²	1 ... 6 mm ²	1 ... 6 mm ²
Max. cable length	Standard	Standard	Standard
			




Contacts	U_e AC	Mounting width						
1 NO	230 V	1 MW		–		–	1 × red	5TE4821
				–		–		–
2x 1 NO	400 V	1 MW	1 × green, 1 × blue	5TE4804		–		–
2 NO	400 V	1 MW		–	1 × gray	5TE4811	1 × red	5TE4823
1 NO + 1 NC	400 V	1 MW	1 × gray	5TE4800	1 × gray	5TE4810		–
			1 × red	5TE4805		–	1 × red	5TE4820
			1 × green	5TE4806		–		–
			1 × yellow	5TE4807		–		–
			1 × blue	5TE4808		–		–
2x (1 NO + 1 NC)	400 V	1 MW		–		–		–
2 NO + 2 NC	400 V	1 MW	1 × gray	5TE4801-2	1 × gray	5TE4811-2		–
3 NO + 1 NC	400 V	1 MW	1 × gray	5TE4802	1 × gray	5TE4812-1		–
3 NO + N	400 V	1 MW		–	1 × gray	5TE4812		–
2 NC	400 V	1 MW		–		–	1 × red	5TE4824
4 NC	400 V	1 MW		–	1 × gray	5TE4813		–
2 CO	400 V	1 MW		–	1 × gray	5TE4814		–

Further technical specifications

5TE48


Standards		
Standards		IEC/EN 60947-3 (VDE 0660-107), IEC/EN 60669-1 (VDE 0632-1)
Approvals		IEC/EN 60947-3 (VDE 0660-107)
Supply		
Rated power dissipation P_v	Per pole	0.6 VA
Contacts		
Minimum contact load		10 V; 300 mA
Rated making/rated breaking capacity	At p.f. = 0.65	60 A / 60 A
Rated short-time withstand current I_{cw} per conducting path at p.f. = 0.7	Up to 0.2 s	650 A
	Up to 0.5 s	400 A
	Up to 1 s	290 A
	Up to 3 s	170 A
Thermal rated current I_{th}		20 A
Mechanical service life	Actuations	25000
Safety		
Clearances	Open contacts	2 × >2 mm
	Between the poles	>7 mm
Creepage distances		>7 mm
Rated impulse withstand voltage U_{imp}		>5 kV
Connections		
Terminals	± Screw (Pozidriv)	PZ 1
	Max. tightening torque	0.8 ... 1.0 Nm
Environmental conditions		
Permissible ambient temperature		–5 ... +40 °C
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	45 °C

Double pushbuttons with maintained-contact function and/or momentary-contact function

With LED		Without LED		With LED	
20 A		20 A		20 A	
1 ... 6 mm ²		1 ... 6 mm ²		1 ... 6 mm ²	
150 m		Standard		Standard	
					
1× red	5TE4822	–	–	–	–
1× blue new	5TE4822-1	–	–	–	–
–	–	–	–	1× green, 1× red	5TE4840
–	–	–	–	–	–
–	–	–	–	–	–
–	–	1× green, 1× red	5TE4830	1× green, 1× red	5TE4841
–	–	–	–	–	–
–	–	–	–	–	–
–	–	1× green, 1× red	5TE4831	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–

Accessories

LEDs for manual replacement


	I _e	U _e	Color	Article No.
	0.4 A	12 ... 60 V AC/DC	White	5TG8056-0
			Red	5TG8056-1
			Yellow	5TG8056-2
			Green	5TG8056-3
	115 V AC/DC		White	5TG8057-0
			Red	5TG8057-1
			Yellow	5TG8057-2
			Green	5TG8057-3
	230 V AC		White	5TG8058-0
			Red	5TG8058-1
			Yellow	5TG8058-2
			Green	5TG8058-3
			Blue	5TG8058-4

Cap sets

- For manual changing of colored caps with or without lamps
- 1 set = 5 units

Color	Article No.
 Red, transparent	5TG8061
 Green, transparent	5TG8062
 Yellow, transparent	5TG8063
 Blue, transparent	5TG8064
 Black, non-transparent	5TG8065
 White, transparent	5TG8066
 Gray, non-transparent	5TG8060

Sets of mixed caps

	For manual changing of colored caps with or without lamps	
Color	Article No.	
10× each of red/green + 5× each of yellow/blue/white	5TG8067	
1× each of red/green/yellow	5TG8070	

Color coding according to IEC 60073

Color	Safety of people/ environment	Process state	System state
Red	Danger	Emergency	Faulty
Green	Safety	Normal	Normal
Yellow	Warning/Caution	Abnormal	Abnormal
Blue	Stipulation		
Black, white, gray	No special significance assigned		

5TE58 light indicators

With LED

5TE58 light indicators

Rigid conductor cross-section	1.5 ... 6 mm ²	1.5 ... 6 mm ²
Flexible conductor cross-section, with end sleeve	1 ... 6 mm ²	1 ... 6 mm ²
Max. cable length	Standard	250 m



U _e AC	Mounting width				
230 V	1 MW	1× red	5TE5800	1× red	5TE5804
		1× green, 1× red	5TE5801		–
		3× green	5TE5802		–
		1× red, 1× yellow, 1× green	5TE5803		–
12 ... 60 V new	1 MW	1× red	5TE5810		–
		1× green	5TE5810-1		–
		1× green, 1× red	5TE5811		–
		3× green	5TE5812		–
		1× red, 1× yellow, 1× green	5TE5812-1		–

Further technical specifications

5TE58

Standards

Standards	DIN VDE 0710-1-11
-----------	-------------------

Supply

Rated power dissipation P _v	LED	0.4 VA
--	-----	--------

Safety

Clearances	Between the terminals	>7 mm
------------	-----------------------	-------

Connections

Terminals	± Screw (Pozidriv)	PZ 1
	Max. tightening torque	1.2 Nm

Environmental conditions

Permissible ambient temperature		–5 ... +40 °C
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	45 °C

Accessories

LEDs for manual replacement



I_e	U_e	Color	Article No.
0.4 A	12 ... 60 V AC/DC	White	5TG8056-0
		Red	5TG8056-1
		Yellow	5TG8056-2
		Green	5TG8056-3
		Blue	5TG8056-4
	115 V AC/DC	White	5TG8057-0
		Red	5TG8057-1
		Yellow	5TG8057-2
		Green	5TG8057-3
		Blue	5TG8057-4
	230 V AC	White	5TG8058-0
		Red	5TG8058-1
		Yellow	5TG8058-2
		Green	5TG8058-3
		Blue	5TG8058-4

Cap sets

- For manual changing of colored caps
- 1 set = 5 units

Version	Article No.
Red, transparent	5TG8061
Green, transparent	5TG8062
Yellow, transparent	5TG8063
Blue, transparent	5TG8064
White, transparent	5TG8066







Sets of mixed caps

- For manual changing of colored caps

Color	Article No.
10× each of red/green + 5× each of yellow/blue/white	5TG8067
1× each of red/green/yellow	5TG8070




Color coding according to IEC 60073

Color	Safety of people/ environment	Process state	System state
Red	Danger	Emergency	Faulty
Green	Safety	Normal	Normal
Yellow	Warning/Caution	Abnormal	Abnormal
Blue	Stipulation		
Black, white, gray	No special significance assigned		

5TE81/82 On/Off switches

	5TE81 On/Off switches	5TE82 On/Off switches
Rated operational current I_e per conducting path	20 A	32 A
Rigid conductor cross-section	1.5 ... 6 mm ²	1.5 ... 6 mm ²
Flexible conductor cross-section, with end sleeve	1 ... 6 mm ²	1 ... 6 mm ²
		

Contacts	U_e AC	Mounting width	Auxiliary switches			Auxiliary switches		
			Can be retrofitted	Cannot be retrofitted	Mounted	Can be retrofitted	Cannot be retrofitted	Mounted
1 NO	230 V	1 MW	5TE8111	–	–	5TE8211	–	–
2 NO	400 V	1 MW	5TE8112	–	–	5TE8212	–	–
3 NO	400 V	1 MW	5TE8113	–	–	5TE8213	–	–
3 NO + N	400 V	1 MW	–	5TE8114	–	–	5TE8214	–
		1.5 MW	–	–	5TE8118	–	–	5TE8218

Further technical specifications

	5TE81	5TE82
Standards		
Standards	IEC/EN 60947-3 (VDE 0660-107), IEC/EN 60669-1	IEC/EN 60947-3 (VDE 0660-107)
Approvals	IEC/EN 60947-3 (VDE 0660-107)	
Supply		
Rated power dissipation P_v	Per pole	0.7 VA
Contacts		
Minimum contact load	10 V; 300 mA	
Rated making/rated breaking capacity	At p.f. = 0.65	60 A / 60 A
Rated short-time withstand current $I_{c,w}$ per conducting path at p.f. = 0.7	Up to 0.2 s	650 A
	Up to 0.5 s	400 A
	Up to 1 s	290 A
	Up to 3 s	170 A
Thermal rated current I_{th}	20 A	
Electrical/mechanical service life	Actuations	10000 / 25000
Safety		
Clearances	Open contacts	2× >2 mm
	Between the poles	>7 mm
Creepage distances	>7 mm	
Rated short-circuit making capacity I_{cm}	10 kA	
Rated impulse withstand voltage U_{imp}	>5 kV	
Connections		
Terminals	± Screw (Pozidriv)	PZ 1
	Max. tightening torque	1.2 Nm
Environmental conditions		
Permissible ambient temperature	–5 ... +40 °C	
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	45 °C

Accessories

Auxiliary switches (AS)



- For right-hand-side retrofitting with factory-fitted brackets

Contacts	Version	Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Handle locking device



- To prevent undesired mechanical On/Off switching
- Sealable
- For padlock with max. 3 mm shackle

Article No.
5ST3801

Terminal cover



- For covering screw openings
- Sealable

Article No.
5ST3800

Spacer



- Contour for modular devices with a mounting depth of 70 mm
- Can be snapped onto either side of the busbar for convenient cable routing
- Spacer is recommended for better heat dissipation



Article No.
5TG8240

5TL1 On/Off switches

	Rated operational current I_e per conducting path							
	32 A	40 A	63 A	80 A	100 A			
Rigid conductor cross-section	1 ... 35 mm ²	1 ... 35 mm ²	1 ... 35 mm ²	2.5 ... 50 mm ²	2.5 ... 50 mm ²			
Flexible conductor cross-section, with end sleeve	1 ... 25 mm ²	1 ... 25 mm ²	1 ... 25 mm ²	2.5 ... 50 mm ²	2.5 ... 50 mm ²			
								
Contacts	Rated operational voltage U_e AC	Mounting width	Gray handle	Gray handle	Gray handle	Red handle	Gray handle	Gray handle
1 NO	230 V	1 MW	5TL1132-0	5TL1140-0	5TL1163-0	5TL1163-1	5TL1180-0	5TL1191-0
2 NO	400 V	2 MW	5TL1232-0	5TL1240-0	5TL1263-0	5TL1263-1	5TL1280-0	5TL1291-0
3 NO	400 V	3 MW	5TL1332-0	5TL1340-0	5TL1363-0	5TL1363-1	5TL1380-0	5TL1391-0
4 NO	400 V	4 MW	5TL1432-0	5TL1440-0	5TL1463-0	–	5TL1480-0	5TL1491-0
3 NO + N	400 V	4 MW	5TL1632-0	5TL1640-0	5TL1663-0	5TL1663-1	5TL1680-0	5TL1691-0

Further technical specifications

		5TL1.32	5TL1.40	5TL1.63	5TL1.80	5TL1.91	5TL1.92
Standards							
Standards		IEC/EN 60947-3 (VDE 0660-107)					
Approvals		EN 60669-1					
Supply							
Rated power dissipation P_v	Per pole, max.	0.7 VA	0.9 VA	2.2 VA	3.5 VA	5.5 VA	8.6 VA
Contacts							
Minimum contact load		24 V; 300 mA					
Rated making/rated breaking capacity AC-22A	At p.f. = 0.65	96 A / 96 A	120 A / 120 A	196 A / 196 A	240 A / 240 A	300 A / 300 A	375 A / 375 A
Rated short-time withstand current I_{cw} per conducting path at p.f. = 0.7 ¹⁾	Up to 0.2 s	760 A	950 A	1500 A	2700 A	3400 A	
	Up to 0.5 s	500 A	630 A	1000 A	1650 A	2100 A	
	Up to 1 s	400 A	500 A	800 A	1350 A	1700 A	
	Up to 3 s	280 A	350 A	560 A	800 A	1000 A	
Thermal rated current I_{th}		32 A	40 A	63 A	80 A	100 A	125 A
Electrical/mechanical service life	Switching cycles	10000 / 20000	10000	5000	2000		
Rated power for the switching of resistive load including moderate overload AC-21	1-pole	5 kW	6.5 kW	10 kW	13 kW	16 kW	
	2-pole	9 kW	11 kW	18 kW	22 kW	28 kW	
	3-/4-pole	15 kW	15 kW	30 kW	39 kW	48 kW	
Safety							
Creepage distances		>7 mm					
Clearances	Open contacts	>7 mm					
	Between the poles	>7 mm					
Rated short-circuit making capacity I_{cm} (in conjunction with fuse of the same rated operational current EN 60269 gL/gG)		10 kA					
Rated impulse withstand voltage U_{imp}		>5 kV					
Connections							
Terminals	± Screw (Pozidriv)	PZ 2					
	Max. tightening torque	3.5 Nm					
Environmental conditions							
Permissible ambient temperature		–5 ... +40 °C					
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	45 °C					

125 A	
	2.5 ... 50 mm ²
	2.5 ... 50 mm ²
	
Red handle	Gray handle
5TL1191-1	5TL1192-0
5TL1291-1	5TL1292-0
5TL1391-1	5TL1392-0
–	5TL1492-0
5TL1691-1	5TL1692-0

Accessories

Auxiliary switches (AS)



- For right-hand-side retrofitting with factory-fitted brackets

Contacts	Version	Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Handle locking device



- To prevent undesired mechanical On/Off switching
- Sealable
- For padlock with max. 3 mm shackle

Article No.
5ST3806

Terminal cover



- For covering screw openings
- Sealable

Article No.
5ST3800

Spacer



- Contour for modular devices with a mounting depth of 70 mm
- Can be snapped onto either side of the busbar for convenient cable routing
- Spacer is recommended for better heat dissipation

Article No.
5TG8240

Phase connectors



- For easy wiring in various circuit versions and bus mountings
- As a support terminal for conductors from 2.5 to 50 mm²

Number of poles	I _e	U _e AC	Mounting width	Article No.
1-pole	125 A	230 V	1 MW	5TL1192-4

N conductor connectors



- For easy wiring in various circuit versions and bus mountings
- As a support terminal for N conductors from 2.5 to 50 mm² with blue color marking

Number of poles	I _e	U _e AC	Mounting width	Article No.
1-pole	125 A	230 V	1 MW	5TL1192-3

5TE DC isolator

Can be used as switch disconnectors according to EN 60947-3

Rated operational current I_e
63 A

Rigid conductor cross-section 0.75 ... 35 mm²
Flexible conductor cross-section, with end sleeve 0.75 ... 25 mm²



Contacts	Max. operational voltage U_{max} DC	Mounting width	Auxiliary switches can be retrofitted
4 NO	1000 V	4 MW	5TE2515-1

Further technical specifications

Standards		
Standards	IEC/EN 60947-3; IEC/EN 60669-1; GB14048.3-2008 CCC	
Supply		
Rated operational voltage U_e	For 4 poles in series	880 V DC
Rated power dissipation P_v	Per pole, max.	4.4 W
Contacts		
Minimum contact load	24 V; 300 mA	
Rated short-time withstand current I_{cw}	1000 V DC, 4-pole	760 A
Electrical/mechanical service life	Actuations	5000 / 10000
Safety		
Rated short-circuit making capacity I_{cm}	1000 V DC, 4-pole	500 A
Rated impulse withstand voltage U_{imp}	>5 kV	
Overvoltage category	At $U = 440 \dots 880$ V	II
	At $U = 1000$ V	I
Utilization category	DC-21B	
Connections		
Terminals	± Screw (Pozidriv)	PZ 2
	Max. tightening torque	2.5 ... 3 Nm
Environmental conditions		
Permissible ambient temperature	-25 ... +40 °C	
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	45 °C

Accessories

Auxiliary switches (AS)



- For right-hand-side retrofitting with factory-fitted brackets

Contacts	Version	Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Shunt trips (ST)



Rated operational voltage U_n	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V AC/DC	5ST3031-0XX01

Undervoltage releases (UR)



Version	Rated operational voltage U_n	Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

5TE busbars

For modular installation devices

Single-phase busbar



- For all 5TE8 switches, 20 A and 32 A
- For the cutting of unused terminal lugs and to ensure insulation clearances if one device terminal is to be supplied separately despite being mounted on the bus
- Infeed to unit terminal with conductor cross-section of 6 mm² up to 32 A
- Can be mounted from either top or bottom, in the front or rear terminal area
- An end cap is not required on single-phase busbars

Length	Division	Article No.
210 mm	12 MW version with 1 MW modular clearance	5TE9100


Two-phase busbar



- For all 5TE8 switches, 20 A and 32 A
- Infeed to unit terminal with conductor cross-section of 6 mm² Up to 32 A
- Can be mounted from either top or bottom, in the front and/or rear terminal area, thus allowing realization of a 4-conductor connection using 2 two-phase busbars
- Both copper conductors of the two-phase busbar are insulated together

Length	Division	Article No.
220 mm	12 MW version each with 1 MW modular clearance, phases offset by 0.5 MW	5TE9101

End caps for two-phase busbars



- End caps for 5TE9101 two-phase busbars to maintain insulation clearances when the bar is being cut
- 1 set = 10 units

Article No.
5TE9102

5TT41 remote control switches

Rated current 16 A

Rated operational current I_e
16 A

Rigid conductor cross-section
Flexible conductor cross-section, with end sleeve

1 ... 6 mm²
1 ... 6 mm²





Contacts	U_e	U_c AC	U_c DC	Mounting width		Auxiliary switches can be retrofitted	
				1 MW	2 MW		
1 NO	250 V	230 V	–	■	–	5TT4101-0	
		115 V	–	■	–	5TT4101-1	
		24 V	–	■	–	5TT4101-2	
		12 V	–	■	–	5TT4101-3	
		8 V	–	■	–	5TT4101-4	
		–	110 V	–	■	–	5TT4111-1
		–	24 V	–	■	–	5TT4111-2
		–	12 V	–	■	–	5TT4111-3
		1 NO + 1 NC	250 V	230 V	–	■	–
115 V	–			■	–	5TT4105-1	
24 V	–			■	–	5TT4105-2	
12 V	–			■	–	5TT4105-3	
8 V	–			■	–	5TT4105-4	
–	110 V			–	■	–	5TT4115-1
–	24 V			–	■	–	5TT4115-2
–	12 V			–	■	–	5TT4115-3
2 NO	400 V			230 V	–	■	–
		115 V	–	■	–	5TT4102-1	
		24 V	–	■	–	5TT4102-2	
		12 V	–	■	–	5TT4102-3	
		8 V	–	■	–	5TT4102-4	
		–	110 V	–	■	–	5TT4112-1
		–	24 V	–	■	–	5TT4112-2
		–	12 V	–	■	–	5TT4112-3
		3 NO	400 V	230 V	–	–	■
24 V	–			–	■	5TT4103-2	
4 NO	400 V	230 V	–	–	■	5TT4104-0	
		24 V	–	–	■	5TT4104-2	
		–	110 V	–	■	5TT4114-1	
		24 V	–	–	■	5TT4114-2	

Further technical specifications



		5TT4101 5TT4102 5TT4105	5TT4111 5TT4112 5TT4115	5TT4103 5TT4104 5TT4114
Standards				
Standards		IEC 60669-1, IEC 60669-2, IEC 60669-3, EN 60669 (VDE 0632), EN 60669-2-2, EN 60669-2-2/A1		
Approvals		VDE		
Supply				
Rated operational current I_e	At p.f. = 0.6 ... 1 (AC-15)	16 A		
Primary operating range		0.8 ... 1.1 × U_c		
Rated frequency f_c		50 Hz		
Rated power dissipation P_v	Magnet coil, only pulse	4.5 W / 7 VA		9 W / 13 VA
	Per pole, max.	1.2 W		
Contacts				
Contact gap		>1.2 mm		
Minimum contact load		10 V; 100 mA		
Electrical service life at I_e/U_e , p.f. = 0.6, incandescent lamp load 600 W	Switching cycles	50000		
Incandescent lamp load (switching of incandescent lamps for 15000 switching cycles)	At AC-5b (230 V)	1200 W		
Glow lamp load at 230 V		5 mA		
	With 1 5TT4920 compensator	25 mA		
	With 2 5TT4920 compensators	45 mA		
Minimum pulse duration		50 ms		
Safety				
Different phases between magnet coil and contact		Permissible		
Clearances	Between magnet coil and contact	>6 mm		
Creepage distances	Between magnet coil and contact	>6 mm		
Rated impulse withstand voltage U_{imp}		4 kV		
Function				
Manual operation		Yes		
Switching position indication		Yes		
Connections				
Terminals	± Screw (Pozidriv)	PZ 1		
	Max. tightening torque	0.8 ... 1 Nm		
Environmental conditions				
Permissible ambient temperature		-10 ... +40 °C		
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	35 °C		
Degree of protection	Acc. to EN 60529	IP20, with connected conductors		



Accessories

Auxiliary switches						
	• One device per remote control switch can be retrofitted					
	Contacts	Version	I_e	U_e	Mounting width	Article No.
	1 CO	Standard	5 A	250 V AC	0.5 MW	5TT4900
		For low power	0.1 A	30 V AC/DC	0.5 MW	5TT4901
Compensator						
	• For increasing the glow lamp load by 20 mA					
	U_e	Mounting width	Article No.			
250 V AC	1 MW	5TT4920				

5TT41 remote control switches

For special applications, rated current 16 A

				Remote control switches with central On/Off switching	Remote control switches with central and group On/Off switching
Rigid conductor cross-section				1 ... 6 mm ²	1 ... 6 mm ²
Flexible conductor cross-section, with end sleeve				1 ... 6 mm ²	1 ... 6 mm ²
					
Contacts	U _e	U _c AC	Mounting width	Auxiliary switches cannot be retrofitted	Auxiliary switches cannot be retrofitted
1 NO	250 V	230 V	1.5 MW	5TT4121-0	5TT4151-0
		24 V	1.5 MW	5TT4121-2	5TT4151-2
2 NO	400 V	230 V	1.5 MW	5TT4122-0	5TT4152-0
		24 V	1.5 MW	5TT4122-2	5TT4152-2
3 NO	400 V	230 V	2.5 MW	5TT4123-0	–
1 NO + 1 NC	250 V	115 V	1.5 MW	5TT4125-0	–

				Series remote control switch contact sequence 1 – 2 – 1+2 – 0	Shutter/blind remote control switch contact sequence 1 – 0 – 2 – 0
Rigid conductor cross-section				1 ... 6 mm ²	1 ... 6 mm ²
Flexible conductor cross-section, with end sleeve				1 ... 6 mm ²	1 ... 6 mm ²
					
Contacts	U _e	U _c AC	Mounting width	Auxiliary switches cannot be retrofitted	Auxiliary switches cannot be retrofitted
2 NO	250 V	230 V	1 MW	5TT4132-0	5TT4142-0
		24 V	1 MW	–	5TT4142-2
		12 V	1 MW	5TT4132-3	5TT4142-3

Further technical specifications		5TT412 5TT415	5TT413 5TT414
Standards			
Standards		IEC 60669-1, IEC 60669-2, IEC 60669-3, EN 60669 (VDE 0632), EN 60669-2-2, EN 60669-2-2/A1	
Approvals		VDE	
Supply			
Rated operational current I_c	At p.f. = 0.6 ... 1 (AC-15)	16 A	
Primary operating range		0.8 ... 1.1 × U_c	
Rated frequency f_c		50 Hz	
Rated power dissipation P_v	Magnet coil, only pulse	4.5 W / 7 VA	
	Per pole, max.	1.2 W	
Contacts			
Contact gap		>1.2 mm	
Minimum contact load		10 V; 100 mA	
Electrical service life at I_e/U_e , p.f. = 0.6, incandescent lamp load 600 W	Switching cycles	50000	
Incandescent lamp load (switching of incandescent lamps for 15000 switching cycles)	At AC-5b (230 V)	1200 W	
Glow lamp load at 230 V		5 mA	
	With 1 5TT4920 compensator	25 mA	
	With 2 5TT4920 compensators	45 mA	
Minimum pulse duration		50 ms	
Safety			
Different phases between magnet coil and contact		Permissible	
Clearances	Between magnet coil and contact	>6 mm	
Creepage distances	Between magnet coil and contact	>6 mm	
Rated impulse withstand voltage U_{imp}		4 kV	
Function			
Manual operation		Yes	
Switching position indication		Yes	–
Connections			
Terminals	± Screw (Pozidriv)	PZ 1	
	Max. tightening torque	0.8 ... 1 Nm	
Environmental conditions			
Permissible ambient temperature		–10 ... +40 °C	
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	35 °C	
Degree of protection	Acc. to EN 60529	IP20, with connected conductors	

Accessories

Auxiliary switches



- One device per remote control switch can be retrofitted

Contacts	Version	I_e	U_e	Mounting width	Article No.
1 CO	Standard	5 A	250 V AC	0.5 MW	5TT4900
	For low power	0.1 A	30 V AC/DC	0.5 MW	5TT4901

Compensator




- For increasing the glow lamp load by 20 mA

U_e	Mounting width	Article No.
250 V AC	1 MW	5TT4920

5TT44 remote control switches

Rated current 20 A – 63 A

	Rated operational current I_e				
	20 A	25 A	32 A	40 A	63 A
Rigid conductor cross-section	1 ... 10 mm ²	1 ... 10 mm ²	1 ... 10 mm ²	2.5 ... 25 mm ²	2.5 ... 25 mm ²
Flexible conductor cross-section, with end sleeve	1 ... 10 mm ²	1 ... 10 mm ²	1 ... 10 mm ²	2.5 ... 25 mm ²	2.5 ... 25 mm ²




Contacts	U_e	U_c AC	U_c DC	Mounting width					
For AC applications – auxiliary switches can be retrofitted									
1 NO + 1 NC	440 V	230 V	–	1 MW	5TT4405-0	5TT4425-0	5TT4455-0	–	–
				2 MW	–	–	–	5TT4465-0	5TT4475-0
	24 V	–	1 MW	5TT4405-2	5TT4425-2	5TT4455-2	–	–	
			2 MW	–	–	–	5TT4465-2	5TT4475-2	
1 CO	250 V	230 V	–	1 MW	5TT4407-0	–	–	–	–
				1 MW	5TT4407-2	–	–	–	–
2 NO	440 V	230 V	–	1 MW	5TT4402-0	5TT4422-0	5TT4452-0	–	–
				2 MW	–	–	–	5TT4462-0	5TT4472-0
	24 V	–	1 MW	5TT4402-2	5TT4422-2	5TT4452-2	–	–	
			2 MW	–	–	–	5TT4462-2	5TT4472-2	
2 CO	440 V	230 V	–	2 MW	–	5TT4428-0	5TT4458-0	5TT4468-0	5TT4478-0
				2 MW	–	5TT4428-2	5TT4458-2	5TT4468-2	5TT4478-2
4 NO	440 V	230 V	–	2 MW	–	5TT4424-0	5TT4454-0	–	–
				4 MW	–	–	–	5TT4464-0	5TT4474-0
	24 V	–	2 MW	–	5TT4424-2	5TT4454-2	–	–	
			4 MW	–	–	–	5TT4464-2	5TT4474-2	
2 NO + 2 NC	440 V	230 V	–	2 MW	–	5TT4426-0	5TT4456-0	–	–
				4 MW	–	–	–	5TT4466-0	5TT4476-0
	24 V	–	2 MW	–	5TT4426-2	5TT4456-2	–	–	
			4 MW	–	–	–	5TT4466-2	5TT4476-2	
For DC applications									
1 NO	250 V	–	24 V	1 MW	5TT4411-5	5TT4431-5	5TT4451-5	–	–
2 NO	440 V	–	24 V	1 MW	5TT4412-5	5TT4432-5	5TT4452-5	–	–
1 NO + 1 NC	440 V	–	24 V	1 MW	5TT4415-5	5TT4435-5	5TT4455-5	–	–
1 CO	250 V	–	24 V	1 MW	5TT4417-5	5TT4437-5	5TT4457-5	–	–


Further technical specifications		5TT440	5TT442	5TT445	5TT446	5TT447
Standards						
Standards		IEC 60669-2-2			IEC/EN 60947-4-1	
Approvals		CE				
Supply						
Rated operational current I_e	At p.f. = 0.6 ... 1 (AC-15)	20 A	25 A	32 A	40 A	63 A
Rated frequency f_c		50/60 Hz				
Rated power dissipation P_v	Magnet coil, "On" pulse	13 W / 18 VA			12 W / 26 VA	
	Per pole, max.	1.5 W	2 W	3 W		3.5 W
Rated operational power (AC-3)	1-phase, at 230 V	0.5 kW	0.75 kW	1.1 kW	2.2 kW	4 kW
	3-phase, at 230 V	1.5 kW	2.2 kW	3 kW	5.5 kW	11 kW
	3-phase, at 400 V	3 kW	4 kW	5.5 kW	11 kW	18.5 kW
Contacts						
Contact gap		>3 mm				
Minimum contact load AC		10 V; 100 mA				
Electrical service life at I_e/U_e , p. f. = 0.6, incandescent lamp load 600 W	Switching cycles	50000				
Incandescent lamp load (switching of incandescent lamps for 15000 switching cycles)	At AC-5b (230 V)	4400 W	5500 W	7000 W	8800 W	13800 W
Max. switching speed	In switching cycles per hour	600 h ⁻¹	450 h ⁻¹		360 h ⁻¹	
Safety						
Different phases between magnet coil and contact		Permissible				
Rated impulse withstand voltage U_{imp}		3 kV				
Function						
Manual operation		Yes				
Switching position indication		Yes				
Connections						
Terminals	± Screw (Pozidriv)	Coil: PZ 1, contact: PZ 2				
	Max. tightening torque	Coil: 0.6 Nm, contact: 1.2 Nm			Coil: 0.6 Nm, contact: 2 Nm	
Coil conductor cross-sections		1 ... 4 mm ²				
Environmental conditions						
Permissible ambient temperature	For operation/for storage	-25 ... +55 °C / -30 ... +80 °C				
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	55 °C				
Degree of protection	Acc. to EN 60529	IP20				
Mounting position		Any (not upside down)				

Accessories


Auxiliary switch

	Contacts	U_e	I_e	Mounting width	Article No.
	1 NO + 1 NC	250 V AC	16 A	0.5 MW	5TT4930

Auxiliary switches, central with diode

	• For central function (no auxiliary switch)				
	U_e	Mounting width	Article No.		
	250 V AC	0.5 MW	5TT4931		


Auxiliary switches, group with several diodes

	• For group function (no auxiliary switch)				
	U_e	Mounting width	Article No.		
	250 V AC	0.5 MW	5TT4932		

5TT4 auxiliary switches

For 5TT4 remote control switches

	Auxiliary switches for 5TT41	Auxiliary switches for 5TT44
Rigid conductor cross-section	0.5 ... 2.5 mm ²	1 ... 4 mm ²
Flexible conductor cross-section, with end sleeve	0.5 ... 2.5 mm ²	1 ... 4 mm ²

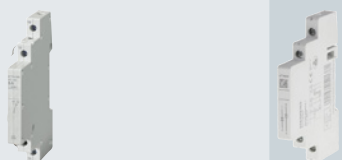

Contacts	Version	I _e	U _e	Mounting width		
Auxiliary switches						
1 NO + 1 NC	Standard	16 A	250 V AC	0.5 MW	–	5TT4930
1 CO	Standard	5 A	250 V AC	0.5 MW	5TT4900	–
	For low power	0.1 A	30 V AC/DC	0.5 MW	5TT4901	–
Auxiliary switches, central with diode for central function (no auxiliary switch)						
			250 V AC	0.5 MW	–	5TT4931
Auxiliary switches, group with several diodes for group function (no auxiliary switch)						
			250 V AC	0.5 MW	–	5TT4932

Further technical specifications		Auxiliary switches for 5TT41		Auxiliary switches for 5TT44		
		5TT4900	5TT4901	5TT4930	5TT4931	5TT4932
Standards						
Standards		EN 60947-1 (VDE 0660 Part 100) EN 60947-5-1 (VDE 0660 Part 200)		IEC/EN 60947-5-1		
Approvals		–		CE, EAC		
Supply						
Rated operational current I _e	At p.f. = 0.6 ... 1 (AC-15)	16 A		4 A	–	
Rated frequency f _c		–		50/60 Hz		
Rated power dissipation P _v	Per pole, max.	–		0.3 W		
Contacts						
Contact gap		<1.2 mm		>3 mm		
Minimum contact load		5 V; 1 mA		12 V; 5 mA		
Electrical service life at I _e /U _e , p.f. = 0.6, incandescent lamp load 600 W		Switching cycles		100000	–	
Safety						
Clearances		Between magnet coil and contact	>6 mm	–		
Creepage distances		Between magnet coil and contact	>6 mm	–		
Rated impulse withstand voltage U _{imp}			1 kV	1 kV		
Pushbutton malfunction protected against continuous voltage, safe due to design			Yes	–		
Function						
Manual operation			–	No		
Switching position indication			–	No		
Connections						
Terminals		± Screw (Pozidriv)	PZ 1	PZ 1		
		Max. tightening torque	0.5 Nm	0.8 Nm		
Environmental conditions						
Permissible ambient temperature		For operation/for storage	–10 ... +40 °C / –10 ... +40 °C	–25 ... +70 °C / –30 ... +80 °C		
Resistance to climate at 95% relative humidity		Acc. to DIN 50015	35 °C	55 °C		
Degree of protection		Acc. to EN 60529	IP20, with connected conductors	IP20		
Mounting position			Any	Any (not upside down)		

Accessories

Compensator



- For increasing the glow lamp load by 20 mA

U_e	Mounting width	Article No.
250 V AC	1 MW	5TT4920

5TT42 switching relays

Rated current 16 A

Rated operational current I_e

16 A

Rigid conductor cross-section

1 ... 6 mm²

Flexible conductor cross-section, with end sleeve

1 ... 6 mm²



Contacts	U_e	U_c AC	U_c DC	Mounting width		
1 NO	250 V	230 V	–	1 MW	5TT4201-0	
		115 V	–	1 MW	5TT4201-1	
		24 V	–	1 MW	5TT4201-2	
		12 V	–	1 MW	5TT4201-3	
		8 V	–	1 MW	5TT4201-4	
2 NO	400 V	230 V	–	1 MW	5TT4202-0	
		115 V	–	1 MW	5TT4202-1	
		24 V	–	1 MW	5TT4202-2	
		12 V	–	1 MW	5TT4202-3	
		8 V	–	1 MW	5TT4202-4	
4 NO	400 V	230 V	–	1 MW	5TT4204-0	
		115 V	–	1 MW	5TT4204-1	
		24 V	–	1 MW	5TT4204-2	
		12 V	–	1 MW	5TT4204-3	
		8 V	–	1 MW	5TT4204-4	
1 NO + 1 NC	400 V	230 V	–	1 MW	5TT4205-0	
		115 V	–	1 MW	5TT4205-1	
		24 V	–	1 MW	5TT4205-2	
		12 V	–	1 MW	5TT4205-3	
		8 V	–	1 MW	5TT4205-4	
1 CO	250 V	230 V	–	1 MW	5TT4206-0	
		115 V	–	1 MW	5TT4206-1	
		24 V	–	1 MW	5TT4206-2	
		12 V	–	1 MW	5TT4206-3	
		8 V	–	1 MW	5TT4206-4	
2 CO	400 V	230 V	–	1 MW	5TT4207-0	
		115 V	–	1 MW	5TT4207-1	
		24 V	–	1 MW	5TT4207-2	
		12 V	–	1 MW	5TT4207-3	
		8 V	–	1 MW	5TT4207-4	
		–	110 V	–	1 MW	5TT4217-1
		–	30 V	–	1 MW	5TT4217-6
		–	24 V	–	1 MW	5TT4217-2
		–	12 V	–	1 MW	5TT4217-3
		–	–	–	–	–

Further technical specifications		5TT4201-	5TT4202-	5TT4204-	5TT4205-	5TT4206-	5TT4207-	5TT4217-
Standards								
Standards		EN 60947-5-1, EN 60669-2-2						
Approvals		VDE, CCC						
Supply								
Rated operational current I_e	At p.f. = 0.6 ... 1	16 A						
Primary operating range		0.8...1.1× U_c						
Rated frequency f_c		50 Hz						
Rated power dissipation P_v	Magnet coil	2.4 W 3.0 VA		4.8 W 6.0 VA		2.4 W 3.0 VA		1.7 W 1.7 VA
	Per pole, max.	1.0 W						
Contacts								
Contact gap		>1.2 mm						
Minimum contact load		10 V AC; 100 mA						
Electrical service life at I_e/U_e , p.f. = 0.6, incandescent lamp load 600 W	Switching cycles	50000						
Safety								
Different phases between magnet coil and contact		Permissible						
Safe separation		>6 mm						
Rated impulse withstand voltage U_{imp}		4 kV						
Function								
Manual operation		Yes						
Connections								
Terminals	± Screw (Pozidriv)	PZ 1						
	Max. tightening torque	0.8 ... 1 Nm						
Environmental conditions								
Permissible ambient temperature		-10 ... +40 °C						
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	35 °C						
Degree of protection	Acc. to EN 60529	IP20, with connected conductors						

Accessories

Spacer



- Contour for modular devices with a mounting depth of 70 mm
- Can be snapped onto either side of the busbar for convenient cable routing
- Spacer is recommended for better heat dissipation

Article No.

5TG8240

5TT50 Insta contactors

AC/DC technology

	Rated operational current I_e			
	20 A	25 A	40 A	63 A
Main connection conductor cross-section, solid	1.0 ... 10 mm ²	1.5 ... 25 mm ²	1.5 ... 25 mm ²	1.5 ... 25 mm ²
Main connection conductor cross-section, stranded with end sleeve	1.0 ... 6 mm ²	1.5 ... 16 mm ²	1.5 ... 16 mm ²	1.5 ... 16 mm ²
Main connection conductor cross-section, AWG	16 ... 8	16 ... 4	16 ... 4	16 ... 4



Contacts	U_e	U_c AC	U_c DC	Mounting width				
Insta contactors with manual switch								
2 NO	230 V	230 V	220 V	1 MW	5TT5000-0	–	–	–
		24 V	24 V	1 MW	5TT5000-2	–	–	–
4 NO	400 V	230 V	220 V	2 MW	–	5TT5030-0	–	–
				3 MW	–	–	5TT5040-0	5TT5050-0
		115 V	110 V	2 MW	–	5TT5030-1	–	–
		24 V	24 V	2 MW	–	5TT5030-2	–	–
				3 MW	–	–	5TT5040-2	5TT5050-2
2 NC	230 V	230 V	220 V	1 MW	5TT5002-0	–	–	–
		24 V	24 V	1 MW	5TT5002-2	–	–	–
4 NC	400 V	230 V	220 V	2 MW	–	5TT5033-0	–	–
				3 MW	–	–	5TT5043-0	–
		24 V	24 V	2 MW	–	5TT5033-2	–	–
				3 MW	–	–	5TT5043-2	–
1 NO + 1 NC	230 V	230 V	220 V	1 MW	5TT5001-0	–	–	–
		24 V	24 V	1 MW	5TT5001-2	–	–	–
2 NO + 2 NC	400 V	230 V	220 V	2 MW	–	5TT5032-0	–	–
				3 MW	–	–	5TT5042-0	5TT5052-0
		24 V	24 V	2 MW	–	5TT5032-2	–	–
				3 MW	–	–	5TT5042-2	5TT5052-2
3 NO + 1 NC	400 V	230 V	220 V	2 MW	–	5TT5031-0	–	–
				3 MW	–	–	5TT5041-0	5TT5051-0
		24 V	24 V	2 MW	–	5TT5031-2	–	–
				3 MW	–	–	5TT5041-2	5TT5051-2
Insta contactors with O//Automatic								
2 NO	230 V	230 V	220 V	1 MW	5TT5000-6	–	–	–
		24 V	24 V	1 MW	5TT5000-8	–	–	–
4 NO	400 V	230 V	220 V	2 MW	–	5TT5030-6	–	–
		24 V	24 V	2 MW	–	5TT5030-8	–	–
1 NO + 1 NC	230 V	230 V	220 V	1 MW	5TT5001-6	–	–	–
		24 V	24 V	1 MW	5TT5001-8	–	–	–
3 NO + 1 NC	400 V	230 V	220 V	2 MW	–	5TT5031-6	–	–
		24 V	24 V	2 MW	–	5TT5031-8	–	–


Further technical specifications


		5TT500	5TT503	5TT504	5TT505
Standards					
Standards		EN 60947-4-1; EN 60947-5-1; EN 61095			
Approvals		UL 508; UL File No. E303328			
Supply					
Rated operational current I_e	AC-1/AC-7a, NO contacts / NC contacts	20 A / 20 A	25 A / 25 A	40 A / 40 A	63 A / 63 A
	AC-3/AC-7b, NO contacts / NC contacts	9 A / 6 A	8.5 A / 8.5 A	22 A / 22 A	30 A / 30 A
Primary operating range		0.85 ... 1.1 × U_c			
Rated frequency f_c at AC		50/60 Hz			
Rated power dissipation P_v	Pick-up power (without manual switch or with manual switch in "I" position)	2.1 VA / 2.1 W	2.6 VA / 2.6 W	5 VA / 5 W	
	Pick-up power (with manual switch in "AUTO" position)	2.1 VA / 4.1 W	2.6 VA / 2.6 W	5 VA / 5 W	
	Holding power	2.1 VA / 2.1 W	2.6 VA / 2.6 W	5 VA / 5 W	
	Per contact AC-1/AC-7a	1.7 VA	2.2 VA	4 VA	8 VA
Contacts					
Contact gap (NO contacts)	Min.	3.6 mm			
Minimum switching capacity	(= minimum contact load)	≥17 V; 50 mA			
Electrical service life at I_e and load	AC-1/AC-7a switching cycles	200000		100000	
	AC-3/AC-7b switching cycles	300000	500000	150000	
Mechanical service life	Switching cycles	3 million			
Switching of resistive loads AC-1 at rated operational power P_s	Single-phase (NO contacts)	4 kW (230 V)	5.4 kW (400 V)	8.7 kW (400 V)	13.3 kW (400 V)
	Three-phase (NO contacts)	–	16 kW (400 V)	26 kW (400 V)	40 kW (400 V)
Switching of three-phase asynchronous motors AC-3 at rated operational power P_s	Single-phase (NO contacts)	1.3 kW / 0.75 kW	1.3 kW / 1.3 kW	3.7 kW / 3.7 kW	5/5 kW
	Three-phase (NO contacts)	–	4 kW	11 kW	15 kW
Maximum switching frequency at load	AC-1/AC-7a / AC-3/AC-7b	600 h ⁻¹			
Safety					
Rated impulse withstand voltage U_{imp}		≤4 kV			
Short-circuit protection, according to coordination type 1	Back-up fuse characteristic gL/gG	20 A	25 A	63 A	80 A
Overload withstand capability at 10 s	Per conducting path (NO contacts only)	72 A	68 A	176 A	240 A
Function					
Switching times	Closing (NO contacts)	15 ms ... 45 ms		15 ms ... 20 ms	
	Opening (NO contacts)	20 ms ... 50 ms	20 ms ... 70 ms	35 ms ... 45 ms	
Connections					
Coil/main connection terminals	± Screw (Pozidriv)	PZ 1 / PZ 1	PZ 1 / PZ 2		
Coil connection conductor cross-section	Solid	1.0 ... 2.5 mm ²			
	Stranded, with end sleeve	1.0 ... 2.5 mm ²			
	AWG cables	16 ... 10			
Main connection conductor cross-section	Solid	1.0 ... 10 mm ²	1.5 ... 25 mm ²		
	Stranded, with end sleeve	1.0 ... 6 mm ²	1.5 ... 16 mm ²		
	AWG cables	16 ... 8	16 ... 4		
Tightening torque	Coil connection	0.6 Nm / 8 lbs/in.			
	Main connection	1.2 Nm / 9 lbs/in.	3.5 Nm / 20 lbs/in.		
Environmental conditions					
Permissible ambient temperature	For operation ¹⁾ / For storage	–15 ... +55 °C / –50 ... +80 °C			
Degree of protection	Acc. to EN 60529	IP 20, with connected conductors			
Characteristics according to UL 508					
Rated operational current I_n		20 A	25 A	40 A	63 A
UL 508 General Use 240 V/480 V	FLA	20 A	25 A	40 A	63 A
UL 508 AC discharge lamps		20 A	25 A	30 A	40 A
UL 508 motor load	Power 240 V / 480 V	1 hp / –	3 hp / 5 hp	7.5 hp / 15 hp	10 hp / 20 hp
UL 508 short-circuit at 480 V	K5 fuses	20 A	25 A	60 A	70 A

¹⁾ Contactors can be operated at ambient temperatures of between –25 °C and +70 °C, but only under special conditions.

For more information, please contact Siemens Support. For questions concerning heat dissipation, please refer to the instructions in the Configuration Manual "Switching Devices".

Accessories


Auxiliary switches			
	• For right-hand-side retrofitting		
	• Max. one auxiliary switch per Insta contactor		
	Contacts	Mounting width	Article No.
	2 NO	0.5 MW	5TT5910-0
1 NO + 1 NC	0.5 MW	5TT5910-1	

Sealable terminal covers			
	For Insta contactor	Mounting width	Article No.
	20 A	1 MW	5TT5910-5
	25 A	2 MW	5TT5910-6
40 A and 63 A	3 MW	5TT5910-7	

5TT58 Insta contactors

AC technology

	Rated operational current I_e			
	20 A	25 A	40 A	63 A
Main connection conductor cross-section, rigid	1.0 ... 10 mm ²	1.0 ... 10 mm ²	1 ... 25 mm ²	1 ... 25 mm ²
Main connection conductor cross-section, flexible with end sleeve	1.0 ... 6 mm ²	1.0 ... 6 mm ²	1 ... 16 mm ²	1 ... 16 mm ²




Contacts	U_e	U_c AC	Mounting width					
Insta contactors without manual switch								
2 NO	230 V	230 V	1 MW	5TT5800-0	–	–	–	
		24 V	1 MW	5TT5800-2	–	–	–	
4 NO	400 V	230 V	Standard	2 MW	–	5TT5830-0	–	–
			Capacitive loads up to 150 µF	2 MW	–	–	5TT5840-0	5TT5850-0
				2 MW	–	5TT5820-0	–	–
		115 V	2 MW	–	5TT5830-1	–	–	
			24 V	2 MW	–	5TT5830-2	–	–
				3 MW	–	–	5TT5840-2	5TT5850-2
2 NC	230 V	230 V	1 MW	5TT5802-0	–	–	–	
		24 V	1 MW	5TT5802-2	–	–	–	
4 NC	400 V	230 V	2 MW	–	5TT5833-0	–	–	
			3 MW	–	–	5TT5843-0	5TT5853-0	
			2 MW	–	5TT5833-2	–	–	
		24 V	3 MW	–	–	5TT5843-2	5TT5853-2	
			1 MW	–	5TT5801-0	–	–	
			1 MW	–	5TT5801-2	–	–	
2 NO + 2 NC	400 V	230 V	2 MW	–	5TT5832-0	–	–	
			3 MW	–	–	5TT5842-0	5TT5852-0	
			2 MW	–	5TT5832-2	–	–	
		24 V	3 MW	–	–	5TT5842-2	5TT5852-2	
			2 MW	–	5TT5831-0	–	–	
			3 MW	–	–	5TT5841-0	5TT5851-0	
3 NO + 1 NC	400 V	230 V	2 MW	–	5TT5831-0	–	–	
			3 MW	–	–	5TT5841-0	5TT5851-0	
			2 MW	–	5TT5831-1	–	–	
		115 V	2 MW	–	5TT5831-2	–	–	
			24 V	2 MW	–	–	5TT5841-2	5TT5851-2
				3 MW	–	–	–	–
Insta contactors with manual switch O/I/Automatic								
2 NO	230 V	230 V	1 MW	5TT5800-6	–	–	–	
		24 V	1 MW	5TT5800-8	–	–	–	
4 NO	400 V	230 V	2 MW	–	5TT5830-6	–	–	
			3 MW	–	–	5TT5840-6	5TT5850-6	
		24 V	2 MW	–	5TT5830-8	–	–	
			3 MW	–	–	5TT5840-8	–	
1 NO + 1 NC	230 V	230 V	1 MW	5TT5801-6	–	–	–	
		24 V	1 MW	5TT5801-8	–	–	–	
3 NO + 1 NC	400 V	230 V	2 MW	–	5TT5831-6	–	–	
			3 MW	–	–	5TT5841-6	–	
			2 MW	–	5TT5831-8	–	–	
		24 V	3 MW	–	–	5TT5841-8	–	
			2 MW	–	–	–	–	
			3 MW	–	–	–	–	


Further technical specifications

		5TT580.	5TT582. 5TT583.	5TT584.	5TT585.
Standards					
Standards		IEC 60947-4-1, IEC 60947-5-1, IEC 61095; EN 60947-4-1, EN 60947-5-1, EN 61095, VDE 0660			
Supply					
Number of poles		2	4		
Rated operational current I_e		20 A	25 A	40 A	63 A
Primary operating range		0.85 ... 1.1 × U_c			
Rated frequency f_c at AC		50/60 Hz			
Rated power dissipation P_v	Pick-up power (without manual switch or manual switch in "I" position)	6 VA / 3.8 W	10 VA / 5 W	15.4 VA / 4.6 W	
	Pick-up power (with manual switch in "AUTO" position)	12 VA / 10 W	33 VA / 25 W	62 VA / 50 W	
	Holding power	2.8 VA / 1.2 W	5.5 VA / 1.6 W	7.7 VA / 3 W	
	Per contact AC-1/AC-7a	1.7 VA	2.2 VA	4 VA	8 VA
Contacts					
Contact gap	Minimum	3.6 mm		3.4 mm	
Minimum switching capacity	(= minimum contact load)	≥17 V; 50 mA			
Electrical service life at I_e and load	AC-1/AC-7a switching cycles	200000		100000	
	AC-3/AC-7b switching cycles	300000	500000	150000	
Mechanical service life	Switching cycles	3 million			
Switching of resistive loads AC-1/AC-7a for rated operational power P_s	Single-phase (230 V) (NO contacts)	4 kW	5.4 kW	8.7 kW	13.3 kW
	Three-phase (400 V) (NO contacts)	–	16 kW	26 kW	40 kW
Switching of three-phase asynchronous motors AC-3/AC-7b for rated operational power P_s	Single-phase (230 V) (NO contacts)	1.3 kW ¹⁾	1.3 kW	3.7 kW	5 kW
	Three-phase (400 V) (NO contacts)	–	4 kW	11 kW	15 kW
Maximum switching frequency at load		600 h ⁻¹			
Safety					
Rated insulation voltage U_i		440 V		500 V	
Rated impulse withstand voltage U_{imp}		4 kV			
Short-circuit protection, according to coordination type 1	Back-up fuse characteristic gL/gG	20 A	25 A	63 A	80 A
Overload withstand capability at 10 s	Per conducting path (NO contacts only)	72 A	68 A	176 A	240 A
Function					
Switching times	Closing (NO contacts)	15 ms ... 25 ms	10 ms ... 20 ms	15 ms ... 20 ms	
	Opening (NO contacts)	20 ms		10 ms	
	Closing (NC contacts)	20 ms ... 30 ms		5 ms ... 10 ms	
	Opening (NC contacts)	10 ms		10 ms ... 15 ms	
Connections					
Coil connection terminals	± Screw (Pozidriv)	PZ 1			
Main connection terminals	± Screw (Pozidriv)	PZ 1		PZ 2	
Coil connection conductor cross-section	Rigid	1.0 ... 2.5 mm ²			
	Flexible, with end sleeve	1.0 ... 2.5 mm ²			
Main connection conductor cross-section	Rigid	1.0 ... 10 mm ²		1 ... 25 mm ²	
	Flexible, with end sleeve	1.0 ... 6 mm ²		1 ... 16 mm ²	
Tightening torque	Coil connection	0.6 Nm			
	Main connection	1.2 Nm		3.5 Nm	
Environmental conditions					
Permissible ambient temperature	For operation/for storage	–5 ... +55 °C / –30 ... +80 °C			
Degree of protection	Acc. to EN 60529	IP 20, with connected conductors			

¹⁾ For NO contacts only.

Accessories

Auxiliary switches			
	<ul style="list-style-type: none"> For right-hand-side retrofitting Max. one auxiliary switch per Insta contactor 		
	Contacts	Mounting width	Article No.
	2 NO	0.5 MW	5TT5910-0
	1 NO + 1 NC	0.5 MW	5TT5910-1

Sealable terminal covers			
	For Insta contactor	Mounting width	Article No.
	20 A	1 MW	5TT5910-5
	25 A	2 MW	5TT5910-6
40 A and 63 A	3 MW	5TT5910-7	

5TT5 auxiliary switches

For 5TT5 Insta contactor

Rigid conductor cross-section 1 ... 2.5 mm²
Flexible conductor cross-section, with end sleeve 1 ... 2.5 mm²



Contacts	U _e AC	Mounting width	
2 NO	230 V / 400 V	0.5 MW	5TT5910-0
1 NO + 1 NC	230 V / 400 V	0.5 MW	5TT5910-1

Further technical specifications

5TT5910

Standards		
Standards		IEC 60947-5-1
Approvals		CCC
Supply		
Number of poles		2
Rated operational current I _e	230 V	6 A
	400 V	4 A
Rated frequency f _c at AC		50/60 Hz
Contacts		
Contact gap	Minimum	4 mm
Minimum switching capacity	(= minimum contact load)	≥12 V; 5 mA
Mechanical service life	Switching cycles	3 million
Maximum switching frequency at load		600 h ⁻¹
Safety		
Rated insulation voltage U _i		500 V
Rated impulse withstand voltage U _{imp}		4 kV
Short-circuit protection, according to coordination type 1	Back-up fuse characteristic gL/gG	6 A
Connections		
Terminals	± Screw (Pozidriv)	PZ 1
Conductor cross-section	Rigid	1 ... 2.5 mm ²
	Flexible, with end sleeve	1 ... 2.5 mm ²
Tightening torque		0.8 Nm
Environmental conditions		
Permissible ambient temperature	For operation/for storage	-5 ... +55 °C / -30 ... +80 °C
Degree of protection	Acc. to EN 60529	IP 20, with connected conductors

5TT3 soft-starting devices

For two-phase motor control

Rigid conductor cross-section Max. 2 × 2.5 mm²
Flexible conductor cross-section, with end sleeve Min. 1 × 0.5 mm²



Version	U _e AC	Mounting width	
Three-phase	400 V	6 MW	5TT3440

Further technical specifications

5TT3440

Standards		
Standards		EN 60947-4-2 (VDE 0660-117)
Supply		
Line/motor voltage		400 V AC
Primary operating range		0.8 ... 1.1 × U _c
Rated frequency f _c at AC		50/60 Hz
Rated power		3.5 VA
Rated power dissipation P _v at rated operational current	Coil/drive	3.5 VA
	Per contact	4.6 VA
Rated output of motor at 400 V	Max.	5500 VA
	Min.	300 VA
Startup voltage		30 ... 70%
Starting ramp		0.1 ... 10 s
Safety		
Quick-acting semiconductor fuse		35 A
Function		
Switching frequency 3 × I _N , T _{AN} = 10 s, v _u = 20%	Switching cycles (up to 3 kW)	36 h ⁻¹
	Switching cycles (from 3 ... 5.5 kW)	20 h ⁻¹
Recovery time		100 ms
Connections		
Conductor cross-section	Rigid	Max. 2 × 2.5 mm ²
	Flexible, with end sleeve	Min. 1 × 0.5 mm ²
Environmental conditions		
Permissible ambient temperature		-20 ... +60 °C
Resistance to climate	Acc. to EN 60068-1	20/60/4

7LF4 digital time switches

Mini



- Weekly program
- 28 programs
- Automatic daylight-saving adjustment

Contacts	U_c	Channels	Mounting width	
1 NO	230 V AC	1	1 MW	7LF4501-5

Further technical specifications

Mini

Standards		
Standards		EN 60730-1, -2-7; VDE 0631-1, -2-7
Supply		
Primary operating range		0.85 ... 1.1 × U_c
Frequency range		50/60 Hz
Rated power dissipation P_v		0.9 VA
Channels		
Rated operational voltage U_e		250 V AC
Rated operational current I_e		At p.f. = 1 16 A
		At p.f. = 0.6 10 A
Contacts		
Minimum contact load		12 V / 100 mA
Electrical switching cycles		At p.f. = 1 6000 (20 A)
Mechanical switching cycles		>5 million
Incandescent lamp load		5 A
Energy-saving lamp load		300 W
Fluorescent lamp load		Parallel p.f. correction 70 μF 60 VA
		Uncorrected 2500 VA
Safety		
Different phases between operating mechanism and contact		Permissible
Rated impulse withstand voltage U_{imp}		4 kV
Electrostatic discharge		Acc. to IEC 61000-4-2 >8.0 kV
EMC: Burst		Acc. to IEC 61000-4-4 >4.4 kV
EMC: Surge		Acc. to IEC 61000-4-5 >2.0 kV
Overvoltage category		Acc. to EN 61010-1 III
Function		
Clock errors per day		Typical ±1 s/day
Power reserve storage		Battery 3 years
Make and break cycles		1 min
Minimum switching sequences		1 min
Control input		Terminal S –
Programs ¹⁾		28
Battery type		Li primary cell
Connections		
Terminals		± Screw (Pozidriv) PZ 1
Conductor cross-sections of main current path		Rigid 1.5 ... 4 mm ² Flexible, with end sleeve Max. 2.5 mm ²
Environmental conditions		
Permissible ambient temperature		For operation/ for storage –10 ... +55 °C / –20 ... +60 °C
Resistance to climate		Acc. to EN 60068-1 10/055/21
Degree of protection		Acc. to EN 60529 IP20, with connected conductors
Safety class		Acc. to EN 61140 II

¹⁾ A program consists of an ON time, an OFF time and assigned ON and OFF days or day blocks.

Top



- Weekly program
- 28 programs
- Text-assisted programming concept
 - Language: English
- Manual daylight-saving adjustment

Contacts	U _c	Channels	Mounting width	
1 CO	230 V AC	1	2 MW	7LF4511-0
2 CO	230 V AC	2	2 MW	7LF4512-0

Further technical specifications

Further technical specifications		Top
Standards		
Standards		EN 60730-1, -2-7; VDE 0631-1, -2-7
Supply		
Primary operating range		0.85 ... 1.1 × U _c
Frequency range		50/60 Hz
Rated power dissipation P _v		2 VA
Channels		
Rated operational voltage U _e		250 V AC
Rated operational current I _e	At p.f. = 1	16 A
	At p.f. = 0.6	10 A
Contacts		
Minimum contact load		12 V / 100 mA
Electrical switching cycles	At p.f. = 1	100000
Mechanical switching cycles		10 million
Incandescent lamp load		8 A
Energy-saving lamp load		60 VA
Fluorescent lamp load	Parallel p.f. correction 70 μF	60 VA
	Uncorrected	2300 VA
Safety		
Different phases between operating mechanism and contact		Permissible ²⁾
Rated impulse withstand voltage U _{imp}		4 kV
Electrostatic discharge	Acc. to IEC 61000-4-2	>8.0 kV
EMC: Burst	Acc. to IEC 61000-4-4	>4.4 kV
EMC: Surge	Acc. to IEC 61000-4-5	>2.0 kV
Oversvoltage category	Acc. to EN 61010-1	III
Function		
Clock errors per day	Typical	±1.5 s/day
Power reserve storage	Battery	3 years
Make and break cycles		1 min
Minimum switching sequences		1 min
Control input	Terminal S	No
Programs ¹⁾		28 (14 per channel)
Program memory	Captive	No
Battery type		Li primary cell
Connections		
Terminals	± Screw (Pozidriv)	PZ 1
Conductor cross-sections of main current path	Rigid	1.5 ... 4 mm ²
	Flexible, with end sleeve	Max. 2.5 mm ²
Environmental conditions		
Permissible ambient temperature	For operation/ for storage	–20 ... +55 °C / –20 ... +60 °C
Resistance to climate	Acc. to EN 60068-1	20/055/21
Degree of protection	Acc. to EN 60529	IP20, with connected conductors
Safety class	Acc. to EN 61140	II

¹⁾ A program consists of an ON time, an OFF time and assigned ON and OFF days or day blocks.

²⁾ The combination of line voltage (230 V) and SELV is not permissible in conjunction with a 2-channel time switch. This requirement is, however, admissible in the case of 1-channel time switch.

7LF4 digital time switches

Profi



- Weekly program
- Vacation program
- Random program
- Expert mode
- Cycle function
- Text-assisted programming concept
 - 15 languages
- Simple program creation on a PC using the supplied software, with 7LF4941-0 USB adapter
- Automatic daylight-saving adjustment
- Operating hours counter, counting range: 65535 h
- Accurate to the second hh:mm:ss
- Synchronization 50/60 Hz

Contacts	U_c	Channels	Mounting width	
1 CO	230 V AC	1	2 MW	7LF4521-0
	24 V AC/DC	1	2 MW	7LF4521-2
2 CO	230 V AC	2	2 MW	7LF4522-0
	24 V AC/DC	2	2 MW	7LF4522-2

Further technical specifications

Profi

Standards		
Standards		EN 60730-1, -2-7; VDE 0631-1, -2-7
Approvals		UL File No. E301698
Supply		
Primary operating range	U_c 230 V	0.85 ... 1.1 × U_c
	U_c 24 V	0.9 ... 1.1 × U_c
Frequency range	U_c 230 V	50/60 Hz
	U_c 24 V	50/60 Hz
Rated power dissipation P_v	U_c 230 V	2 VA
	U_c 24 V	2 VA
Channels		
Rated operational voltage U_e		250 V AC
Rated operational current I_e	At p.f. = 1	16 A
	At p.f. = 0.6	10 A
Contacts		
Minimum contact load		12 V / 100 mA
Electrical switching cycles At p.f. = 1		100000
Mechanical switching cycles		10 million
Incandescent lamp load		8 A
Energy-saving lamp load		1000 W
Fluorescent lamp load	Parallel p.f. correction 70 μF	600 VA
	Uncorrected	2000 VA
Safety		
Different phases between operating mechanism and contact		Permissible ²⁾
Rated impulse withstand voltage U_{imp}		4 kV
Electrostatic discharge Acc. to IEC 61000-4-2		>8.0 kV
EMC: Burst Acc. to IEC 61000-4-4		>4.4 kV
EMC: Surge Acc. to IEC 61000-4-5		>2.0 kV
Overvoltage category Acc. to EN 61010-1		III
Function		
Clock errors per day	Typical	±0.1 s/day
Power reserve storage	Battery	5 years
Make and break cycles		1 s
Minimum switching sequences		1 s
Control input	Terminal S	No
Programs ¹⁾		28
Program memory		Captive
Battery type		Li primary cell
Connections		
Terminals	± Screw (Pozidriv)	PZ 1
Conductor cross-sections of main current path	Rigid	1.5 ... 4 mm ²
	Flexible, with end sleeve	Max. 2.5 mm ²
Environmental conditions		
Permissible ambient temperature	For operation/for storage	-20 ... +55 °C / -20 ... +60 °C
Resistance to climate	Acc. to EN 60068-1	20/055/21
Degree of protection	Acc. to EN 60529	IP20, with connected conductors
Safety class	Acc. to EN 61140	II

¹⁾ A program consists of an ON time, an OFF time and assigned ON and OFF days or day blocks.

²⁾ The combination of line voltage (230 V) and SELV is not permissible in conjunction with a 2-channel time switch. This requirement is, however, admissible in the case of 1-channel time switch.

Astro



- Weekly program
- Vacation program
- Random program
- Expert mode
- Astro function
- Text-assisted programming concept
 - 15 languages
- Simple program creation on a PC using the supplied software, with 7LF4941-0 USB adapter
- Automatic daylight-saving adjustment
- Operating hours counter, counting range: 65535 h
- Accurate to the second hh:mm:ss
- Synchronization 50/60 Hz
- Input disable via PIN code
- Daylight-saving correction
- 1 h test

Contacts	U_c	Channels	Mounting width	
1 CO	230 V AC	1	2 MW	7LF4531-0
2 CO	230 V AC	2	2 MW	7LF4532-0

Further technical specifications

Astro




Standards		
Standards		EN 60730-1, -2-7; VDE 0631-1, -2-7
Approvals		UL File No. E301698
Supply		
Primary operating range		0.85 ... 1.1 × U_c
Frequency range		50/60 Hz
Rated power dissipation P_v		2 VA
Channels		
Rated operational voltage U_e		250 V AC
Rated operational current I_e	At p.f. = 1	16 A
	At p.f. = 0.6	10 A
Contacts		
Minimum contact load		12 V / 100 mA
Electrical switching cycles	At p.f. = 1	100000
Mechanical switching cycles		10 million
Incandescent lamp load		8 A
Energy-saving lamp load		1000 W
Fluorescent lamp load	Parallel p.f. correction 70 μF	600 VA
	Uncorrected	2000 VA
Safety		
Different phases between operating mechanism and contact		Permissible ²⁾
Rated impulse withstand voltage U_{imp}		4 kV
Electrostatic discharge	Acc. to IEC 61000-4-2	>8.0 kV
EMC: Burst	Acc. to IEC 61000-4-4	>4.4 kV
EMC: Surge	Acc. to IEC 61000-4-5	>2.0 kV
Oversvoltage category	Acc. to EN 61010-1	III
Function		
Clock errors per day	Typical	±0.1 s/day
Power reserve storage	Battery	5 years
Make and break cycles		1 s
Minimum switching sequences		1 s
Control input	Terminal S	Yes (with 1K clock)
Programs ¹⁾		56 (2 × 28)
Program memory	Captive	Yes
Battery type		Li primary cell
Connections		
Terminals	± Screw (Pozidriv)	PZ 1
Conductor cross-sections of main current path	Rigid	1.5 ... 4 mm ²
	Flexible, with end sleeve	Max. 2.5 mm ²
Environmental conditions		
Permissible ambient temperature	For operation/	–20 ... +55 °C /
	for storage	–20 ... +60 °C
Resistance to climate	Acc. to EN 60068-1	20/055/21
Degree of protection	Acc. to EN 60529	IP20, with connected conductors
Safety class	Acc. to EN 61140	II

¹⁾ A program consists of an ON time, an OFF time and assigned ON and OFF days or day blocks.

²⁾ The combination of line voltage (230 V) and SELV is not permissible in conjunction with a 2-channel time switch. This requirement is, however, admissible in the case of 1-channel time switch.

7LF4 digital time switches

Accessories

		Mini	Top	Profi	Astro
Data keys					
	<ul style="list-style-type: none"> • For Profi and Astro digital time switches • Programming at the PC (7LF4941-0 USB adapter and software required) • Read-in of programs to the time switch • Writing of programs from the time switch • Transfer of programs <ul style="list-style-type: none"> – From PC to time switch and vice versa – From time switch to time switch 				
	Article No.				
	7LF4941-1	–	–	■	■
USB adapter and software					
	<ul style="list-style-type: none"> • For Profi and Astro digital time switches • For the reading and writing of data keys at the PC • Including programming software • Including 7LF4941-1 data key for Profi and Astro • Compatible with 7LF4940-1 data key (predecessor model) and 7LF4940-2 data key • Can be connected via USB interface • System requirements: <ul style="list-style-type: none"> – Windows 7, Windows Vista, Windows 2000, Windows ME, Windows XP or Windows 98 Second Edition – USB connection – 40 MB free disk space 				
	Article No.				
	7LF4941-0	–	–	■	■
Holders for front panel installation					
	<ul style="list-style-type: none"> • Universal application for devices from 1 MW ... 6 MW • Cutout dimensions: <ul style="list-style-type: none"> – Height 45^{+0.5} mm – Width 23 mm, 41 mm, 59 mm, 77 mm, 95 mm or 113 mm 				
	Article No.				
	7LF9006	■	■	■	■

7LF5 mechanical time switches

Time switches without power reserve

For standard mounting rail

For wall mounting
(surface mounting)



Contacts	Mounting width			
With day disk				
1 NO	1 MW	7LF5300-1	–	–
1 CO	3 MW	–	7LF5300-5	–
	–	–	–	7LF5301-0
With week disk				
1 CO	3 MW	–	7LF5300-6	–

Further technical specifications		7LF5300-1	7LF5300-5	7LF5300-6	7LF5301-0
Standards					
Standards		EN 60730-1, -2-7, UL 917, UL 917, CSA C22.2 No. 14 and 177			
Approvals		VDE, UL file: E301698			
Supply					
Rated control supply voltage U_c		230 V AC			
Primary operating range U_c 230 V AC		0.85 ... 1.1 × U_c			
Rated frequency		50 Hz			
Frequency range		50 Hz			
Rated power dissipation P_v		1 VA			
Channels					
Rated operational voltage U_e		250 V AC			
Rated operational current I_e		At p.f. = 1		16 A	
		At p.f. = 0.6		4 A	
Contacts					
Minimum contact load		4 V / 1 mA			
Electrical switching cycles		At p.f. = 1		100000	
Mechanical switching cycles		20 million			
Incandescent lamp load		5 A			
Fluorescent lamp load		Parallel p.f. correction 70 μF		60 VA	
		Uncorrected		1400 VA	
Safety					
Different phases between operating mechanism and contact		Permissible			
Electrical isolation, creepage distances and clearances		Operating mechanism		8 mm	
		Contact		6 mm	
Rated impulse withstand voltage U_{imp}		4 kV			
Electrostatic discharge		Acc. to IEC 61000-4-2		>8.0 kV	
EMC: Burst		Acc. to IEC 61000-4-4		>4.4 kV	
EMC: Surge		Acc. to IEC 61000-4-5		>2.0 kV	
Overvoltage category		Acc. to EN 61010-1		III	
Function					
Switching accuracy		±5 min		±30 min	
Clock errors		System-synchronized			
Make and break cycles		15 min		120 min	
Minimum switching sequences		30 min		240 min	
30 min				30 min	
Connections					
Terminals		± Screw (Pozidriv)		PZ 1	
Conductor cross-sections of main current path		Rigid		1.5 ... 4 mm ²	
		Flexible, with end sleeve		Max. 2.5 mm ²	
		Flexible, without end sleeve		Max. 4 mm ²	
Environmental conditions					
Permissible ambient temperature		For operation/for storage		-10 ... +55 °C / -10 ... +60 °C	
Resistance to climate		Acc. to EN 60068-1		10/055/21	
Degree of protection		Acc. to EN 60529		IP20, with connected conductors	
Safety class		Acc. to EN 61140		II	

Accessories

Holders for front panel installation







- Universal application for devices from 1 MW ... 6 MW
- Cutout dimensions:
 - Height 45^{+0.5} mm
 - Width 23 mm, 41 mm, 59 mm, 77 mm, 95 mm or 113 mm

Article No.

7LF9006

7LF5 mechanical time switches

Time switches with power reserve

	For standard mounting rail			For wall mounting (surface mounting)	
Time buffering in the event of a power failure	–	–	■	–	–
Automatic daylight-saving adjustment	–	–	■	–	–
Automatic time setting for Central European time zone during commissioning	–	–	■	–	–
					
Contacts	Mounting width				
With day disk					
1 NO	1 MW	7LF5301-1	–	–	–
1 CO	3 MW	–	7LF5301-6	7LF5301-4	–
	–	–	–	–	7LF5305-0
With week disk					
1 CO	3 MW	–	7LF5301-7	7LF5301-5	–

Further technical specifications		7LF5301-1	7LF5301-4	7LF5301-5	7LF5301-6	7LF5301-7	7LF5305-0
Standards							
Standards	EN 60730-1, -2-7, UL 917, UL 917, CSA C22.2 No. 14 and 177						
Approvals	VDE, UL file: E301698						
Supply							
Rated control supply voltage U_c	230 V AC						
Primary operating range	0.85 ... 1.1 × U_c						
Rated frequency	50 Hz						
Frequency range	50/60 Hz						
Rated power dissipation P_v	1 VA	0.2 VA		1 VA			
Channels							
Rated operational voltage U_e	250 V AC						
Rated operational current I_e	At p.f. = 1	16 A					
	At p.f. = 0.6	4 A					
Contacts							
Minimum contact load	4 V / 1 mA						
Electrical switching cycles	At p.f. = 1	100000					
Mechanical switching cycles	20 million						
Incandescent lamp load	5 A						
Fluorescent lamp load	Parallel p.f. correction 70 μF	60 VA					
	Uncorrected	1400 VA					
Safety							
Different phases between operating mechanism and contact	Permissible						
Electrical isolation, creepage distances and clearances	Operating mechanism	8 mm					
	Contact	6 mm					
Rated impulse withstand voltage U_{imp}	4 kV						
Electrostatic discharge	Acc. to IEC 61000-4-2	>8.0 kV					
EMC: Burst	Acc. to IEC 61000-4-4	>4.4 kV					
EMC: Surge	Acc. to IEC 61000-4-5	>2.0 kV					
Overvoltage category	Acc. to EN 61010-1	III					
Function							
Switching accuracy	±5 min		±30 min		±5 min	±30 min	±5 min
Clock errors	±2.5 s/day	±0.2 s/day	±60 s/day		±2.5 s/day		
Power reserve storage	100 h	6 years		100 h			
Make and break cycles	15 min		120 min		15 min	120 min	15 min
Minimum switching sequences	30 min		240 min		30 min	240 min	30 min
Battery type	NiMH cell	Li primary cell		NiMH cell			
Minimum loading time	48 h		–		48 h		
Service life of battery	At 20 °C	6 years		10 years		6 years	
	At 40 °C	5 years					
Connections							
Terminals	± Screw (Pozidriv)	PZ 1					
Conductor cross-sections of main current path	Rigid	1.5 ... 4 mm ²					
	Flexible, with end sleeve	Max. 2.5 mm ²					
	Flexible, without end sleeve	Max. 4 mm ²					
Environmental conditions							
Permissible ambient temperature	Storage/operation	–10 ... +60 °C / –10 ... +55 °C					
Resistance to climate	Acc. to EN 60068-1	10/055/21					
Degree of protection	Acc. to EN 60529	IP20, with connected conductors					
Safety class	Acc. to EN 61140	II					

Accessories

Holders for front panel installation





- Universal application for devices from 1 MW ... 6 MW
- Cutout dimensions:
 - Height 45^{+0.5} mm
 - Width 23 mm, 41 mm, 59 mm, 77 mm, 95 mm or 113 mm

Article No.

7LF9006

7LF6 timers for buildings **new**



	Standard stairwell lighting timers	Multi stairwell lighting timers
3-wire circuit	■	■
4-wire circuit	■	■
Zero crossing circuit	■	■
Operation	Resettable	Resettable
		
Contacts	Warning of impending switch-off	Mounting width
1 NO	– Flickering	1 MW 1 MW
		7LF6310 –
		– 7LF6311

Further technical specifications

		7LF6310	7LF6311
Supply			
Rated operational current I_e	At p.f. = 1	16 A	
Rated operational voltage U_e		250 V AC	
Rated control supply voltage U_c		230 V AC	
Frequency range		50/60 Hz	
Rated power dissipation P_v		1 W	
Rated impulse withstand voltage		4 kV	
Contacts			
Channels		1	
Max. glow lamp load		25 mA	50 mA
Separate multi-voltage input		–	8 ... 230 V AC/DC
Switching capacity	Inductive p.f. = 0.6	2000 VA	
Incandescent lamp load	Max.	3680 W	
Fluorescent lamp load	Series p.f. correction	2000 VA	
	Parallel p.f. correction at 70 μ F	1000 W	
Compact fluorescent lamp load		1000 W	
LED		1000 W	
Electronic transformers		2000 VA	
Conventional transformers		2000 VA	
Function			
Setting range		0.5 ... 10 min	0.5 ... 12 min
Manual switches		Yes	
Programs		–	7 ¹⁾
Environmental conditions			
Permissible ambient temperature	For operation	–20 ... +55 °C	
	For storage	–20 ... +60 °C	
Degree of protection	Installed	IP30	
Pollution degree		2	

¹⁾ 7 functions, can be selected using selector switch on the device

5TT3 timers for industrial applications

	Multifunction timers	Delay timers
Programmable for:	<ul style="list-style-type: none"> • Response delay • Passing make contact function • Pulse generator, delayed • Clock generator, starting with impulse • OFF-delay • Pulse converter • Passing break contact function • Response delay/OFF-delay 	–
		
Contacts	Mounting width	
1 CO	1 MW	
	5TT3185	5TT3181

Further technical specifications

	5TT3185	5TT3181
Standards		
Standards	EN 60255; DIN VDE 0435-110	
Supply		
Rated operational current I_e	4 A	8 A
Rated operational voltage U_e	250 V AC	
Rated control supply voltage U_c	12 ... 240 V AC	220 ... 240 V AC
	12 ... 240 V DC	–
Primary operating range	U_c 230 V AC, 50/60 Hz	
Rated frequency f_n	45 ... 400 Hz	50/60 Hz
Rated power dissipation P_v	Approx. 1.5 VA	Approx. 5 VA
Contacts		
Contact gap	µm contact	
Minimum contact load	10 V / 300 mA	
Electrical service life	Switching cycles	1.5 × 10 ⁵
	At AC-15	–
–	–	1.5 × 10 ⁵
Safety		
Rated impulse withstand voltage U_{imp}	Input / output	>4 kV
Function		
Setting range	1 s ... 300 h	
Recovery time	15 ... 80 ms	Approx. 40 ms
Connections		
Terminals	± Screw (Pozidriv)	PZ 2
Conductor cross-sections of main current path	Rigid	Max. 2 × 2.5 mm ²
	Flexible, with end sleeve	Min. 2 × 1.5 mm ²
Environmental conditions		
Permissible ambient temperature	–40 ... +60 °C	
Resistance to climate	Acc. to EN 60068-1	40/60/4

Conditions of sale and delivery

1. General Provisions

By using this catalog you can purchase products (hardware, software and services) described therein from Siemens Aktiengesellschaft subject to the following Terms and Conditions of Sale and Delivery (hereinafter referred to as „T&C“). Please note that the scope, the quality and the conditions for supplies and services, including software products, by any Siemens entity having a registered office outside Germany, shall be subject exclusively to the General Terms and Conditions of the respective Siemens entity. The following T&C apply exclusively for orders placed with Siemens Aktiengesellschaft, Germany.

1.1 For customers with a seat or registered office in Germany

For customers with a seat or registered office in Germany, the following terms and conditions apply subordinate to T&C:

- for products, which include specific terms and conditions in the description text, these specific terms and conditions shall apply and subordinate thereto,
- for installation work the „General Conditions for Erection Works – Germany“¹⁾ („Allgemeine Montagebedingungen – Deutschland“ (currently only available in German)) and/or
- for stand-alone software products and software products forming a part of a product or project, the „General License Conditions for Software Products for Automation and Drives for Customers with a Seat or registered Office in Germany“¹⁾ and/or
- for other supplies and/or services the „General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry“¹⁾. In case such supplies and/or services should contain Open Source Software, the conditions of which shall prevail over the „General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry“¹⁾, a notice will be contained in the scope of delivery in which the applicable conditions for Open Source Software are specified. This shall apply mutatis mutandis for notices referring to other third party software components.

1.2 For customers with a seat or registered office outside Germany

For customers with a seat or registered office outside Germany, the following terms and conditions apply subordinate to T&C:

- for products, which include specific terms and conditions in the description text, these specific terms and conditions shall apply and subordinate thereto,
- for services the „International Terms & Conditions for Services“¹⁾ supplemented by „Software Licensing Conditions“¹⁾ and/or
- for other supplies of hard- and software the „International Terms & Conditions for Products“¹⁾ supplemented by „Software Licensing Conditions“¹⁾

1.3 For customers with master or framework agreement

To the extent our supplies and/or services offered are covered by an existing master or framework agreement, the terms and conditions of that agreement shall apply instead of T&C.

2. Additional Terms and Conditions

The dimensions are in mm. In Germany, according to the German law on units in measuring technology, data in inches apply only to devices for export.

Illustrations are not binding.

Insofar as there are no remarks on the individual pages of this catalog – especially with regard to data, dimensions and weights given – these are subject to change without prior notice.

3. Export Regulations

We shall not be obligated to fulfill any agreement if such fulfillment is prevented by any impediments arising out of national or international foreign trade or customs requirements or any embargoes and/or other sanctions.

Export may be subject to license. We shall indicate in the delivery details whether licenses are required under German, European and US export lists.

Our products are controlled by the U.S. Government (when labeled with „ECCN“ unequal „N“) and authorized for export only to the country of ultimate destination for use by the ultimate consignee or end-user(s) herein identified. They may not be resold, transferred, or otherwise disposed of, to any other country or to any person other than the authorized ultimate consignee or end-user(s), either in their original form or after being incorporated into other items, without first obtaining approval from the U.S. Government or as otherwise authorized by U.S. law and regulations.

The export indications can be viewed in advance in the description of the respective goods on the Industry Mall, our online catalog system. Only the export labels „AL“ and „ECCN“ indicated on order confirmations, delivery notes and invoices are authoritative.

Products labeled with „AL“ unequal „N“ are subject to European / national export authorization. Products without label, with label „AL:N“ / „ECCN:N“, or label „AL:9X9999“ / „ECCN: 9X9999“ may require authorization from responsible authorities depending on the final end-use, or the destination.

¹⁾ The text of the Terms and Conditions of Siemens AG can be downloaded at https://mall.industry.siemens.com/legal/ww/en/terms_of_trade_en.pdf

If you transfer goods (hardware and/or software and/or technology as well as corresponding documentation, regardless of the mode of provision) delivered by us or works and services (including all kinds of technical support) performed by us to a third party worldwide, you must comply with all applicable national and international (re-)export control regulations.

If required for the purpose of conducting export control checks, you (upon request by us) shall promptly provide us with all information pertaining to the particular end customer, final disposition and intended use of goods delivered by us respectively works and services provided by us, as well as to any export control restrictions existing in this relation.

The products listed in this catalog may be subject to European/German and/or US export regulations. Any export requiring approval is therefore subject to authorization by the relevant authorities.

Errors excepted and subject to change without prior notice.

Link directory

Catalog LV 10

General information

Information on low-voltage power distribution and electrical installation technology	www.siemens.com/lowvoltage
Tender specifications	www.siemens.com/lowvoltage/tenderspecifications
Conversion tool	www.siemens.com/conversion-tool
Image database	www.siemens.com/lowvoltage/picturedb
CAX download manager	www.siemens.com/lowvoltage/cax
Newsletter system	www.siemens.com/lowvoltage/newsletter
Siemens YouTube channel	www.youtube.com/Siemens
Brochures / catalogs	www.siemens.com/lowvoltage/catalogs
Operating instructions / manuals	www.siemens.com/lowvoltage/manuals
Siemens Industry Online Support	www.siemens.com/lowvoltage/product-support
Siemens Industry Online Support app	www.siemens.com/support-app
My Documentation Manager (MDM)	www.siemens.com/lowvoltage/mdm
Configurators	www.siemens.com/lowvoltage/configurators
Siemens Industry Mall – product catalog and online ordering system	www.siemens.com/industrymall
Direct forwarding to the Industry Mall	www.siemens.com/product?Article No.
Training	www.siemens.com/sitrain-lowvoltage
Local contacts	www.siemens.com/lowvoltage/contact
Technical Support	www.siemens.com/lowvoltage/support-request
Information on services	www.siemens.com/service-catalog
Manual for the generation, transmission and distribution of electrical energy	www.siemens.com/power-engineering-guide
Control panels for the North American market	www.siemens.com/northamerican-standards
Control panel building	www.siemens.com/controlpanel
Energy savings and amortization	www.automation.siemens.com/sinasave
Energy Suite	www.siemens.com/energysuite
SITOP power supplies	www.siemens.com/sitop
Power distribution with Totally Integrated Power	www.siemens.com/tip

Catalogs and further information



LV 10 Low-Voltage Power Distribution and Electrical Installation Technology SENTRON • SIVACON • ALPHA

Protection, Switching, Measuring and
Monitoring Devices, Switchboards and
Distribution Systems

PDF (E86060-K8280-A101-B1-7600)
Print (E86060-K8280-A101-A6-7600)



LV 14 Power Monitoring Made Simple SENTRON

PDF/Print (E86060-K1814-A101-A6-7600)



LV 18 Air Circuit Breakers and Molded Case Circuit Breakers with UL Certification SENTRON

PDF (E86060-K8280-E347-A4-7600)



ET D1 Switches and Socket Outlets DELTA

PDF



IC 10 Industrial Controls SIRIUS

PDF/Print (E86060-K1010-A101-B1-7600)



Industry Mall Information and Ordering Platform on the Internet:

www.siemens.com/industrymall



Siemens TIA Selection Tool for the selection, configuration and ordering of TIA products and devices

www.siemens.com/tst



Training for Industry SITRAIN

www.siemens.com/sitrain

The catalogs listed above and additional catalogs are available in PDF format at Siemens Industry Online Support www.siemens.com/lowvoltage/catalogs

Further information on low-voltage power distribution and electrical installation technology is available on the Internet at www.siemens.com/lowvoltage

Get more information

www.siemens.com/lowvoltage

Published by
Siemens AG

For the U.S. published by
Siemens Industry Inc.

Smart Infrastructure
Low Voltage Products
Siemensstraße 10
93055 Regensburg, Germany

100 Technology Drive
Alpharetta, GA 30005
United States

PDF (Extract from E86060-K8280-A101-B1-7600)
KG 0520 52 En
Produced in Germany
© Siemens 2020

Subject to changes and errors. The information given in this catalog only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

All product designations may be trademarks or other rights of Siemens AG, its affiliated companies or other companies whose use by third parties for their own purposes could violate the rights of the respective owner.

Security information

Siemens provides products and solutions with industrial security functions that support the secure operation of plants, systems, machines and networks.

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens' products and solutions constitute one element of such a concept.

Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the Internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place.

For additional information on industrial security measures that may be implemented, please visit <https://www.siemens.com/industrialsecurity>

Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats.

To stay informed about product updates, subscribe to the Siemens Industrial Security RSS Feed under <https://www.siemens.com/industrialsecurity>