

Montageanleitung

Concept i-Line 345 210 LED Control Gear

Mounting instructions

Concept i-Line 345 210 LED Control Gear

Instructions de montage

Concept i-Line 345 210 LED Control Gear

Monteringsanvisning

Concept i-Line 345 210 LED Control Gear

Montagehandleiding

Concept i-Line 345 210 LED Control Gear

Instrucciones de montaje


Concept i-Line 345 210 LED Control Gear

Istruzioni di montaggio

Concept i-Line 345 210 LED Control Gear

Asennusohje

Concept i-Line 345 210 LED Control Gear

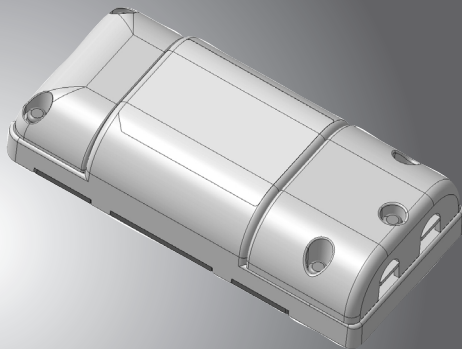

Kit includes

Lieferumfang

Leveransomfattning

Osaluettelo

1 X




5 X




1 X



1 X




1 X



2

345210-01 350 mA

345210-03 700 mA



$t_a = 40^{\circ}\text{C}$

IP20








$t_c = 80^{\circ}\text{C}$



Only authorized electrician may connect the control gear
Installation nur durch einen bevollmächtigten Elektroinstallateur
Installation endast genom befullmäktigad elektriker
Liitäntälaitteen saa kytkeä ainoastaan valtuutettu sähköasentaja



3

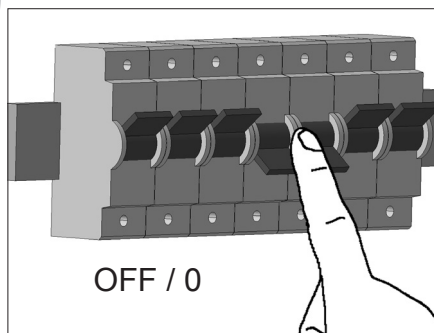



A**B****C****4**

5



A



B




C





6

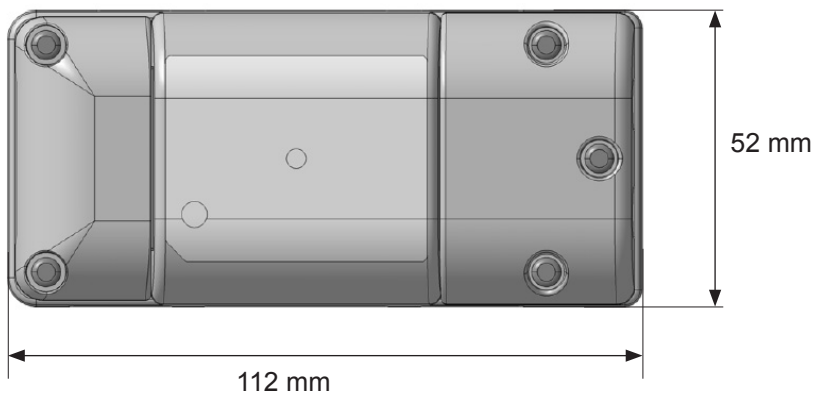


Input	230 VAC / 50 Hz
Output (main)	constant current 350mA / 8W (345210-01) or 700mA / 16W (345210-03), max 28 VDC
Output (ambient)	constant current 50mA

Eingang	230 VAC / 50 Hz
Ausgang (haupt)	Konstantsstrom 350mA / 8W (345210-01) oder 700mA / 16W (345210-03), max 28 VDC
Ausgang (ambient)	Konstantsstrom 50mA

Ingång	230 VAC / 50 Hz
Utgång (huvud)	konstantström 350mA / 8W (345210-01) eller 700mA / 16W (345210-03), max 28 VDC
Utgång (ambient)	konstantström 50 mA

Syöttö	230 VAC / 50 Hz
Ulostulo (pää)	vakiovirta 350mA / 8W (345210-01) tai 700mA / 16W (345210-03), max 28 VDC
Ulostulo (ambient)	vakiovirta 50mA

Input current	< 200mA
Eingangsstrom	< 200mA
Intagström	< 200mA
Ottovirta	< 200mA

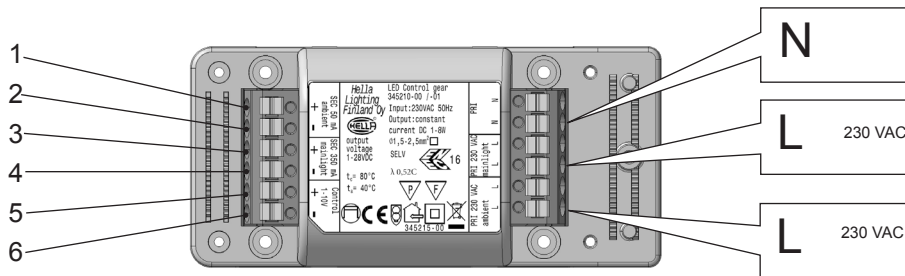

funktionen

- 1 Ambientlicht +**
- 2 Ambientlicht -**
- 3 Hauptlicht +**
- 4 Hauptlicht -**
- 5 1-10 V + abblendung**
- 6 1-10 V - abblendung**

functions

- 1 Ambient light +**
- 2 Ambient light -**
- 3 Main light +**
- 4 Main light -**
- 5 1-10 V + dimming**
- 6 1-10 V - dimming**

funktioner



- 1 Bakgrundsljus +**
- 2 Bakgrundsljus -**
- 3 Huvudljus +**
- 4 Huvudljus -**
- 5 1-10 V + bländare**
- 6 1-10 V - bländare**

toiminnot

- 1 Tunnelmavalo +**
- 2 Tunnelmavalo -**
- 3 Päävalo +**
- 4 Päävalo -**
- 5 1-10 V + himmennin**
- 6 1-10 V - himmennin**

350mA: MAX 28V / 8W

700mA: MAX 28V / 16W

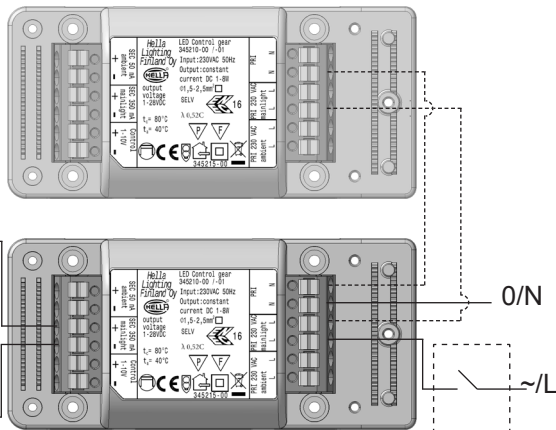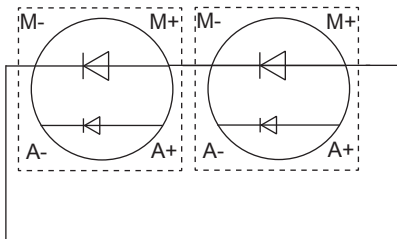

B main and ambient function connected
 Haupt- und Ambient-Funktion eingeschaltet
 Huvud- och ambient-funktion inkopplad
 Pää- ja ambient toiminto kytkettyä


When mainlight is turned on, ambient light will switch off automatically

Wenn das Hauptlicht eingeschaltet wird, geht die Ambient-Funktion automatisch aus

När huvudljuset är tänd, ambient-ljuset slår av automatiskt

Kun päävalo kytketään päälle, sammuu ambient toiminto automaattisesti

350mA: MAX 28V / 8W
 700mA: MAX 28V / 16W

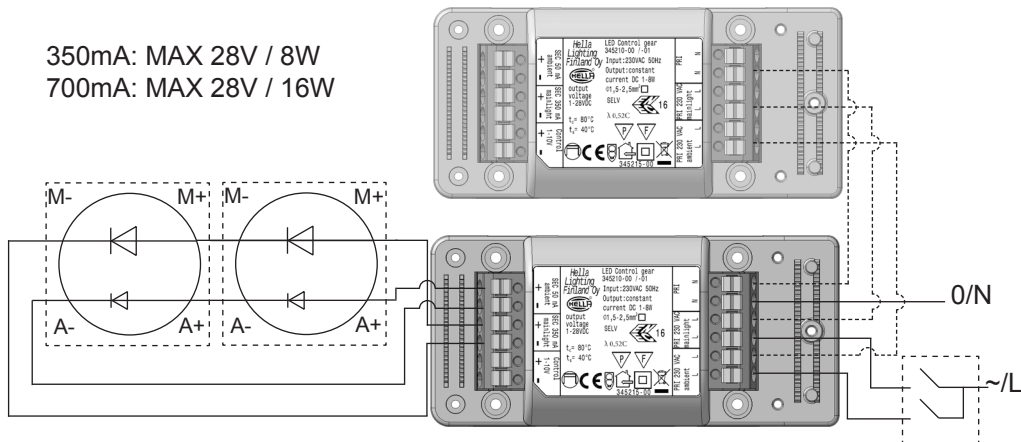



RoHS