

LF -4PIN Protect

RGB 4pin LINEARlight Flex IP67 Connector | Accessories for Flexible LED strips



Product family features

- Quick and easy installation
- Compatible with Linearlight Flex
- Compatible with TEC Flex


Product family benefits

- Simple installation, no tools or soldering required (CONNECTsystem)
- Reduced installation time (CONNECTsystem)
- Can be connected to the front of the module or at division points (CONNECTsystem)
- Low profile (CONNECTsystem)

Product datasheet

Technical data

Dimensions & weight

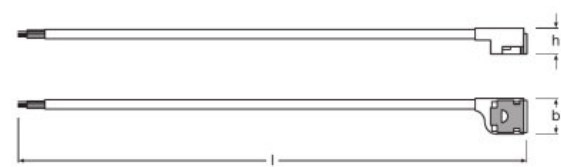

Product weight	20.00 g
Length	30.0 mm
Width	19.8 mm
Height	13.4 mm

Logistical data

Commodity code	854442909000
----------------	--------------

Download Data

File	
	Brochures Light is freedom of design (EN)
	Brochures CONNECTION System for LINEARlight FLEX and TEC Flex IP00 - Quick installation guide

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172016490	LF -4PIN Protect	Shipping carton box 10	570 mm x 150 mm x 340 mm	29.07 dm ³	1097.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.