


LF -CONN-150 FLEX

LINEARlight FLEX IP00 Connection System | – Accessories

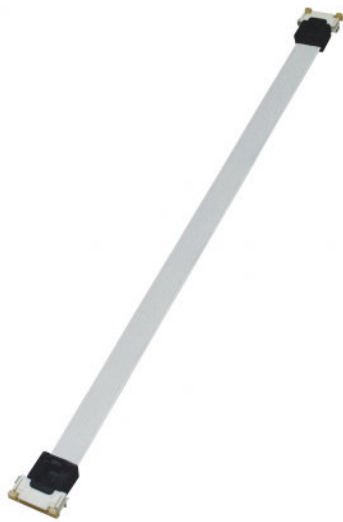


Product family benefits

- Simple installation, no tools or soldering required (CONNECTsystem)
- Reduced installation time (CONNECTsystem)
- Low profile (CONNECTsystem)
- Extremely vibration-proof (CONNECTsystem)
- Permissible operating temperature perfectly matched to module (CONNECTsystem)
- Can be connected to the front of the module or at division points (CONNECTsystem)

Product datasheet

Technical data

Dimensions & weight



Product weight	12.00 g
Length	13.2 mm
Width	13.2 mm
Height	5.3 mm

Logistical data

Commodity code	853669909900
----------------	--------------

Download Data

File	
	Product Datasheet 335862_CONNECTsystem for LINEARlight Colormix Flex 8 mm LF4x-Flex (EN)
	Brochures Light is freedom of design (EN)
	Brochures CONNECTION System for LINEARlight FLEX and TEC Flex IP00 - Quick installation guide

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321955340	LF -CONN-150 FLEX	Shipping carton box 100	211 mm x 40 mm x 147 mm	1.24 dm ³	194.75 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.