


Lampholders for discharge lamps

25.809.3801

G12



pkg. wt. part no.
144 43 g 25.809.3801.00

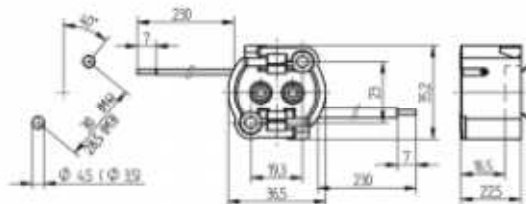

Connection: with cables attached

Wires: 1. Cu, nickel plated, 1.0 mm², with ferrule, Insulation: PTFE 250° C, ø 2 mm, Cable length: 230 mm

Screw fixing
2. Cu, tin plated, 1.0 mm², with ferrule, Insulation: Ceramic 180° C, ø 4.2 mm (ignition cable), Cable length: 230 mm

- The requirements on light fittings of protection class II can be complied with through corresponding embodiment into metal components, without the use of additional insulating material
- Please consult us if fixing at rear with M3 rivet.

T 180

2 A
1000 V

