

Magnetic ballasts for high intensity discharge lamps




A2

Lamp			Ballast							Compensation	
Lamp type	Lamp wattage (W)	Lamp current (A)	Ballast type	Approvals	EEI					Parallel Ck 230/250V ±10% (μF)	Mains current (A)
					Voltage	Net weight (kg)	Inductive λ	Temp. rise ΔT (°C)			
HS/Hi	50	0.76	NK 50 LUAP	-	A2	230	1.38	0.34	40	8.0	0.33
HS/Hi	70	0.98	NK 70 LUAP	ENEC	A2	230	1.38	0.37	55	12.0	0.43
		0.98	NK 70 LUAP	ENEC	A2	240		0.35	55	12.0	0.43
HS/Hi	100	1.2	NK 100 LUAP	ENEC	A2	230	1.38	0.42	65	12.0	0.56

Dimensions

LENGTH 'a' (mm)	114
WIDTH 'b' (mm)	54
HEIGHT 'c' (mm)	45,5
'd' (mm)	105

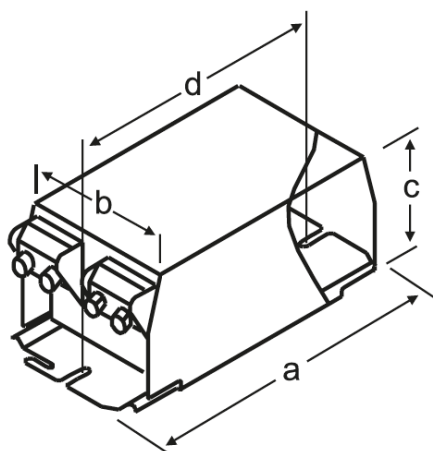

Connection diagram

