


LV-C2

AC 50...60Hz / DC

Constant voltage control gears up to 200W. IP20

Equipos de alimentación de tensión constante hasta 200W. IP20

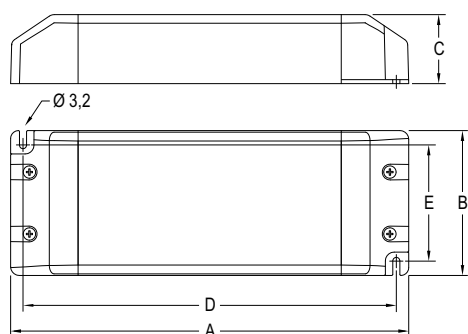

IP20 equipment.
Class II electrical protection.
Equipped with terminal covers.
Cable lock with screws.
Suitable for constant voltage LED modules.
Indoor use.
SELV.
High performance.
Low ripple and noise.
Short circuit protection.
Overload protection.
Nominal lifetime at max. tc allowed: 30.000 h.
Output voltage tolerance $\pm 5\%$.

Packaging and weight pag. 238 and
www.elt.es/productos/packaging_ELT.pdf
Instructions manual on
www.elt.es/productos/inst_manual.htm

Equipos IP20.
Protección eléctrica Clase II.
Equipados con cubre-clemas.
Tapacables de fijación tornillo.
Para módulos LED de tensión constante.
Uso interior.
SELV.
Alto rendimiento.
Baja tensión de rizado y ruido.
Protección contra cortocircuitos.
Protección contra sobrecargas.
Vida útil a máxima tc permitida: 30.000 h.
Tolerancia tensión de salida $\pm 5\%$.

Embalaje y peso pag. 238 y
www.elt.es/productos/embalaje_ELT.pdf
Manual de instrucciones en
www.elt.es/productos/manual_instrucciones.html

Technical characteristics / Características técnicas

	Ref. No.	Nominal input voltage Tensión nominal de entrada	Permitted output power range / Rango de potencia de salida permitido	Output voltage DC Tensión de salida DC	Output current DC Corriente de salida DC	Power factor Factor de potencia	Max. temp. at tc point Temp.máx. envolvente	Operating temp. Temp. funcionamiento	Dimensions Dimensiones				
		Vac	W*	Vdc	A	λ	tc (°C)	ta (°C)	A mm	B mm	C mm	D mm	E mm
LV 100/12-C2	9907109	100-240V	40... 100	12	8,33	0,90	80	-20...+45	180	65,5	31,2	168,8	52,3
LV 100/24-C2	9907129	100-240V	40... 100	24	4,17	0,90	80	-20...+45	180	65,5	31,2	168,8	52,3
LV 130/12-C2	9907110	200-240V	70... 130	12	10,83	0,90	80	-20...+45	180	65,5	31,2	168,8	52,3
LV 150/24-C2	9907130	200-240V	65... 150	24	6,25	0,90	80	-20...+45	180	65,5	31,2	168,8	52,3
LV 180/12-C2	9907111	200-240V	100... 180	12	15	0,95	80	-20...+45	195	67,1	31,2	182,8	57,3
LV 200/24-C2	9907112	200-240V	100... 200	24	8,33	0,95	80	-20...+45	195	67,1	31,2	182,8	57,3

* Range covered by the EC Declaration of Product Conformity / Rango cubierto por la Declaración de Conformidad CE del Producto


Logistical data / Datos logísticos - P. 238

	Net unit weight Peso neto unitario	Units per box Unidades por caja
LV 100-C2	0,400 Kg	20 uds.
LV 130-C2	0,400 Kg	20 uds.
LV 150-C2	0,400 Kg	20 uds.
LV 180-C2	0,500 Kg	15 uds.
LV 200-C2	0,500 Kg	15 uds.

Accesorios / Accessories



See control systems from page 140
Ver sistemas de control a partir de la página 140

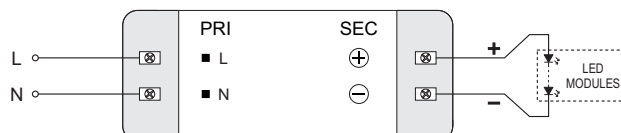

INDOOR SERIES / 4. DECORATIVE LIGHTING - CONSTANT VOLTAGE / 4.1 DRIVERS
SERIE INDOOR / 4. ILUMINACIÓN DECORATIVA - TENSIÓN CONSTANTE / 4.1 DRIVERS

