
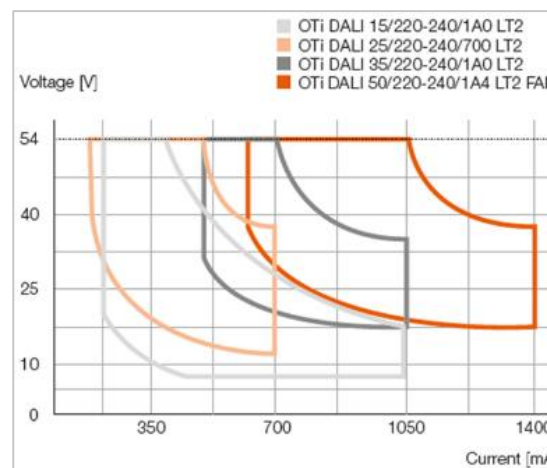
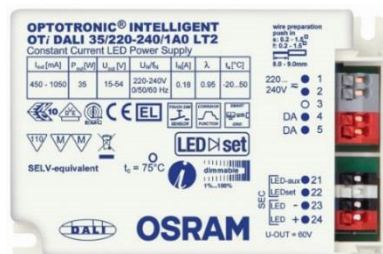



OTi DALI - Maximum Performance & Flexibility

OTi DALI 15	OTi DALI 25	OTi DALI 35	OTi DALI 50 FAN
4052899324879	NEW 4052899488144	NEW 4052899488168	NEW 4052899488182
150-1050 [mA] 18 [W]	180-700 [mA] 27 [W]	350-1050 [mA] 35 [W]	600-1400 [mA] 55 [W]
7,5-54 [V]	12-54 [V]	15-54 [V]	15-54 [V]
93x53x29mm	103x67x29mm	103x67x29mm	110x75x25mm

What's new

- **Amplitude dimming**
100%-1%
(mobile camera friendly)
- DALI ed 2 compatible
- Soft switch off (1%-0% similar to halogen)
- Reduced stand-by



Values for OEM

- Dimensions (derived from QT/PT ECG)
- Lifetime (-20...+50°C, special approval possible)
- Efficiency (up to 90%)
- Flexibility (parametrizable, guarantee, Service)


Applications

- Downlight / Tracklight / LED Panel
- Offices, Hotel, Restaurant, Museum, Architectural, Decorative

OTi DALI 15/25/50 G2

Amplitude dimming

OTi DALI G1

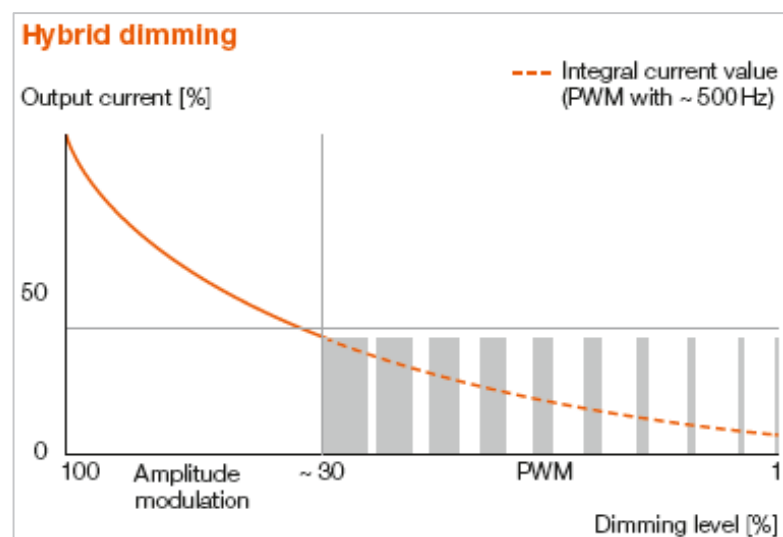

OTi DALI G2

