
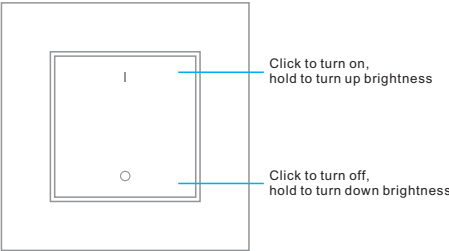
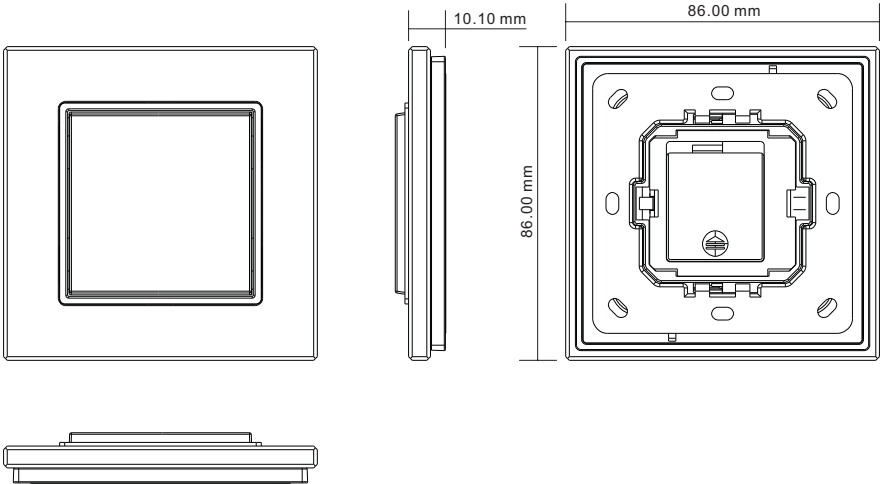
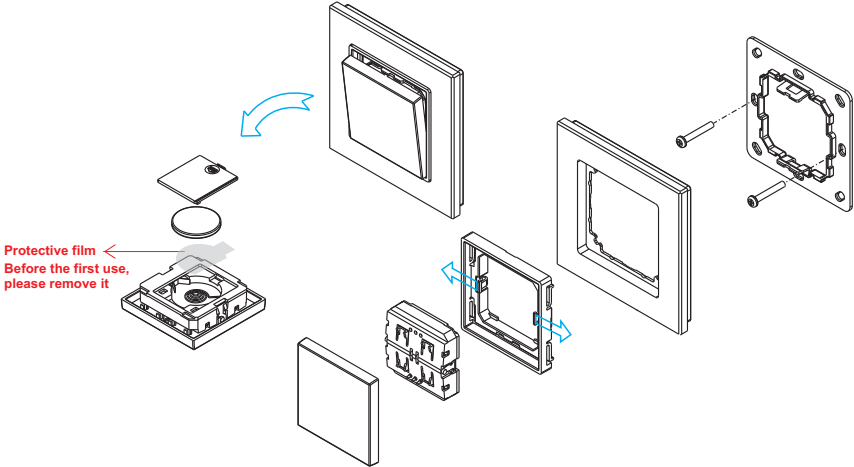


- Compatible with all universal series RF receivers
- Can be wall mounted, or stuck on wall easily by 3M glue.
- Control 1 zone/area

Picture		Brief introduction of buttons
		
Operation Voltage	Operation Frequency	<p>Note : This remote controls 1 zone (area) receivers, the zone can pair with countless receivers. 1 receiver can be paired by max 8 different remote controls.</p>
3VDC(CR2430)	868MHz	
Size		
		

Installation



Protective film ← Before the first use, please remove it

Operation

Note: Before the first use, please remove the protective film on the battery.

1. Pair with RF receivers:

Click "Learning Key" on RF receiver

→

Click any key on the remote, led lights flicker twice means well paired

2. How to delete the pairing:

Power on the RF receiver, hold the "Learning Key" over 3 seconds until connected led lights flicker twice means well deleted.

Mounting

The key part of this controller is a universal, extremely rotary standard switch element that can be integrated in numerous frames by different manufactures as below list:

BEKER	S1, B1, B3, B7 glass
GIRA	Standard55, E2, Event, Esprit
JUNG	A500, Aplus
MERTEN	M-smart, M-Arc, M-Plan