










- Compatible with all universal series RF receivers
- Can be wall mounted, or sticked on wall easily by 3M glue.
- Control 2 zones/areas

S50018

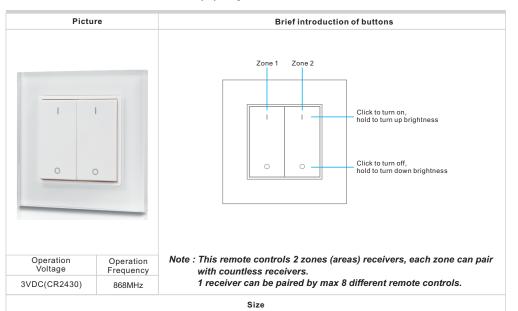

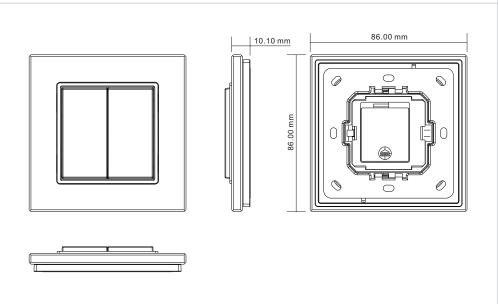

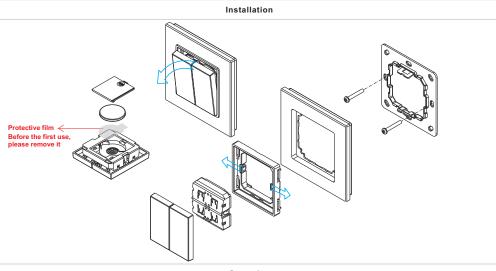

Operation

Note:Before the first use, please remove the protective film on the battery.

1. Pair with RF receivers:

Click "Learning Key" Click any key on the remote, led on RF receiver lights flicker twice means well paired

2. How to delete the pairing:

Power on the RF receiver, hold the "Learning Key" over 3 seconds until connected led lights flicker twice means well deleted.

Mounting

The key part of this controller is a universal, extremely rotary standard switch element that can be integrated in numerous frames by different manufactures as below list:

BEKER	S1, B1, B3, B7 glass
GIRA	Standard55, E2, Event, Esprit
JUNG	A500, Aplus
MERTEN	M-smart, M-Arc, M-Plan