


GYRO SURFACE ROUND  
WARMDIM




220-240V 50/60 Hz 300mA 9W LED IP23


EN: MOUNTING  
NO: MONTERING  
SE: MONTERING  
FI: ASENNUS

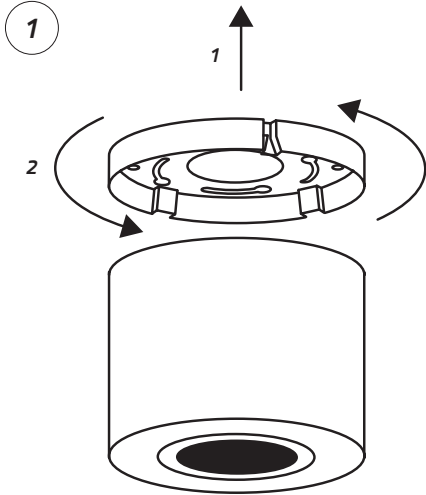

EN: Prepared for surface mounted cable.  
NO: Forberedt for utenpåliggende kabel.  
SE: Förberedd för utenpåliggande kablage.  
FI: Pinta-asennuskaapelivalmius.

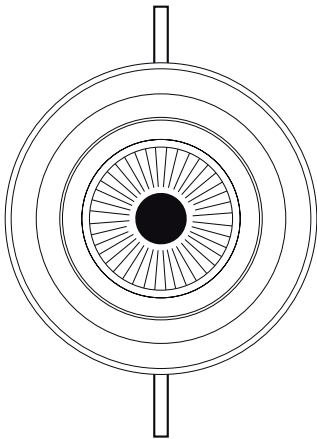


EN: CORRESPONDING PRODUCT.  
NO: TILHØRENDE PRODUKT.  
SE: TILLHÖRANDE PRODUKT.  
FI: AIHEESEN LIITTYVÄ TUOTE.



| NO EL.NR: | SE E.NR:  | FI S.NRO: | DOWNLIGHT BOX:      |
|-----------|-----------|-----------|---------------------|
| 14 059 01 | 13 602 79 | 26 151 00 | KDT-500E 1 POLE     |
| 14 059 02 | 13 602 80 | N/A       | KDT-500E 2 POLE     |
| 14 059 03 | 13 602 40 | 26 151 01 | UNIVERSAL KDT-500IE |
| 14 059 08 | 13 602 81 | 26 151 02 | DUO 2X100W          |
| 14 059 61 | 13 602 82 | 26 151 04 | IMPULS/PUSH 200W    |
| 14 059 70 | 13 602 83 | 26 151 05 | WIDIM A WALL 250W   |
| 14 059 80 | 13 602 85 | 26 151 06 | WIDIM C WIFI-SWITCH |
| BRAND:    |           |           | LUZENSE             |

EN: MEASUREMENT  
NO: MÅL  
SE: MÅTT  
FI: MITAT



EN: Included dimmable LED driver.  
NO: Inkludert dimbar LED driver.  
SE: Inklusive dimbar LED drivdon.  
FI: Sisältää himmennettävän LED-liitäntälaitteen.

OBS!

EN: Installation must be performed by a qualified electrician.  
NO: Må installeres av autorisert el-installør.  
SE: Måste installeras av en behörig elektriker.  
FI: Vain valtuutettu sähköasentaja saa asentaa.

EN: Minimum distance to flammable material in the beam direction.  
NO: Minimumsavstand til brennbart materiale i armaturens stråleretning.  
SE: Minsta avstånd mellan brännbart material och lampans ljusrättning.  
FI: Vähimmäismitta lampusta palaavaan materiaaliin.

