



Low Profile Flexible 6W, 2700K

Technical data

Voltage	220-240 VAC 50 Hz
System effect	6W
Light source	LED
Colour temperature	2700 Kelvin
Light intensity	430 Lumen
Colour rendering	CRI>82
Expected lifespan	50.000 hours
Dimmable, how	Yes, trailing edge
SDCM	≤3
Beam angle	35°
Carving dimensions	Ø75 mm
Installation height	33 mm
Exterior dimensions	Ø87 mm / 87 x 87 mm
Dimensions driver	L: 93, W: 45 mm, H: 22 mm
Tilt angle	30°
Possibility of through wiring	Yes, 3G1,5 - 30 pcs.
IP-class	IP44 (is intended for installation in areas 1 and 2)
Insulation class	Class II
Material	Aluminium, plastic
Environment	Indoors
Warranty	5 years
Approvals	CE

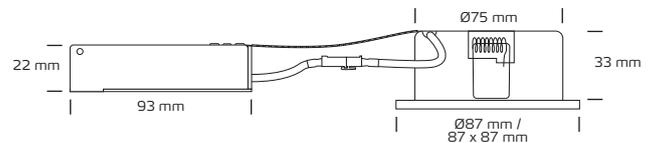

*The drawing is not drawn to scale

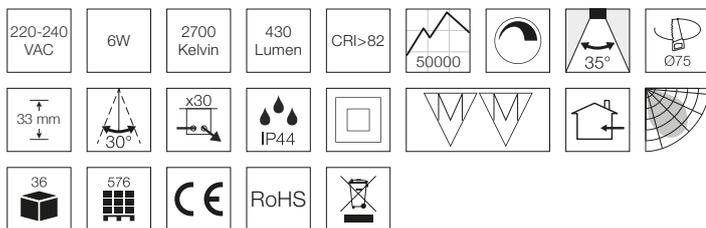

Product information

- Approved for installation directly in the insulation and flammable materials
- Mounting with springs
- Comes with removable driver, which makes it easy to connect the downlight, for example after painting of the ceiling
- Low mounting depth
- Quick and easy mounting
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Designed and developed in Denmark

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
3501	5704629035010	Matt white	Round
3502	5704629035027	Brushed alu	Round
3503	5704629035034	Matt white	Square
3504	5704629035041	Brushed alu	Square
3508	5704629035089	Copper	Round
3509	5704629035096	Matt black	Round