


Low Profile Flexible 6W, 3000K

Technical data


Voltage	220-240 VAC 50 Hz
System effect	6W
Light source	LED
Colour temperature	3000 Kelvin
Light intensity	460 Lumen
Colour rendering	CRI>82
Expected lifespan	50.000 hours
Dimmable, how	Yes, trailing edge
SDCM	≤3
Beam angle	35°
Carving dimensions	Ø75 mm
Installation height	33 mm
Exterior dimensions	Ø87 mm / 87 x 87 mm
Dimensions driver	L: 93, W: 45 mm, H: 22 mm
Tilt angle	30°
Possibility of through wiring	Yes, 3G1,5 - 30 pcs.
IP-class	IP44 (is intended for installation in areas 1 and 2)
Insulation class	Class II
Material	Aluminium, plastic
Environment	Indoors
Warranty	5 years
Approvals	CE

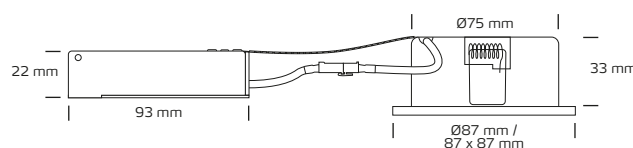

*The drawing is not drawn to scale

Product information

- Approved for installation directly in the insulation and flammable materials
- Mounting with springs
- Comes with removable driver, which makes it easy to connect the downlight, for example after painting of the ceiling
- Low installation height
- Quick and easy mounting
- Can be mounted in acoustic ceiling
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Designed and developed in Denmark

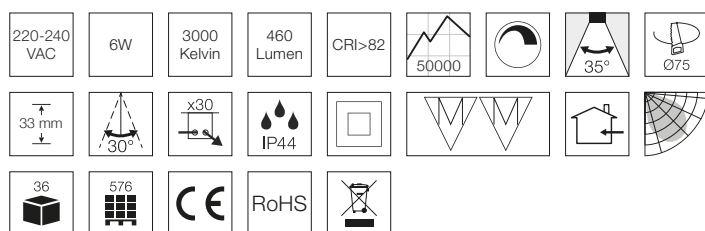

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
3511	5704629035119	Matt white	Round
3512	5704629035126	Brushed alu	Round
3513	5704629035133	Matt white	Square
3514	5704629035140	Brushed alu	Square
3518	5704629035188	Copper	Round
3519	5704629035195	Matt black	Round