


Lucette Slim LED Downlight, 3000K

Technical data


Voltage	100-240VAC 50 Hz
System effect	6W - 24W
Light source	LED
Colour temperature	3000 Kelvin
Light intensity	Up to 2000 Lumen
Colour rendering	CRI>82
Expected lifespan	36,000 hours L70
Carving dimensions	Ø110 mm - Ø280 mm
Installation height	22 mm
Exterior dimensions	Ø120 mm - Ø300 mm
Dimensions driver	L: 68-132 mm, B: 33-45 mm, H: 22-25 mm
Dimensions connector box	L: 85 mm, W: 55 mm, H: 30 mm
Possibility of through wiring	Yes, 3G1.5
IP-class	IP44 (is intended for installation in areas 1 and 2)
IK-class	IK06
Insulation class	Class II
Material	Aluminium, plastic
Environment	Indoors
Warranty	2 years
Approvals	CE

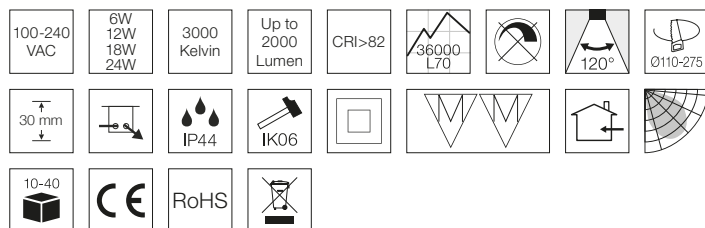

Product information

- Approved for installation directly in the insulation and flammable materials
- Mounting with springs
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Designed for tomorrow's building and energy requirements
- Can be ordered with Dali, triac (TE) or push dimmable driver

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

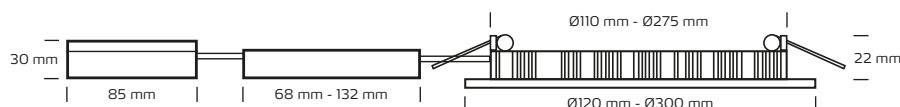

*Tegningen er ikke målfast

Item number	EAN No.	Effect	Lumen	Hole diameter / Front size	Colour
5201	5704629052017	6W	500 Lumen	Ø110 mm / Ø120 mm, H:22 mm	Matt white (RAL 9010)
5202	5704629052024	12W	1000 Lumen	Ø160 mm / Ø172 mm, H:22 mm	Matt white (RAL 9010)
5203	5704629052031	18W	1500 Lumen	Ø208 mm / Ø225 mm, H:22 mm	Matt white (RAL 9010)
5204	5704629052048	24W	2000 Lumen	Ø275 mm / Ø300 mm, H:22 mm	Matt white (RAL 9010)