


Low Profile Flexible 6W, 4000K

Technical data


Voltage	220-240 VAC 50 Hz
System effect	6W
Light source	LED
Colour temperature	4000 Kelvin
Light intensity	494 Lumen
Colour rendering	CRI>82
Expected lifespan	50.000 hours
Dimmable, how	Yes, trailing edge
SDCM	≤3
Beam angle	35°
Carving dimensions	Ø75 mm
Installation height	33 mm
Exterior dimensions	Ø87 mm / 87 x 87 mm
Dimensions driver	L: 93, W: 45 mm, H: 22 mm
Tilt angle	30°
Possibility of through wiring	Yes, 3G1,5 - 30 pcs.
IP-class	IP44 (is intended for installation in areas 1 and 2)
Insulation class	Class II
Material	Aluminium, plastic
Environment	Indoors
Warranty	5 years
Approvals	CE

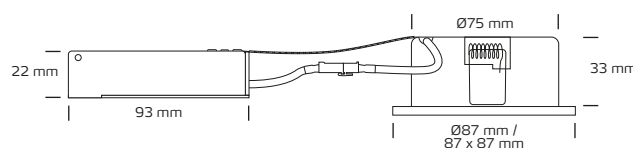

*The drawing is not drawn to scale

Product information

- Approved for installation directly in the insulation and flammable materials
- Mounting with springs
- Comes with removable driver, which makes it easy to connect the downlight, for example after painting of the ceiling
- Low installation height
- Quick and easy mounting
- Can be mounted in acoustic ceiling
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Designed and developed in Denmark

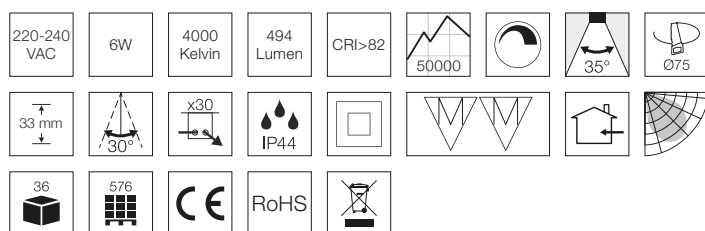

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
3521	5704629035218	Matt white	Round
3522	5704629035225	Brushed alu	Round
3523	5704629035232	Matt white	Square
3524	5704629035249	Brushed alu	Square
3528	5704629035287	Copper	Round
3529	5704629035294	Matt black	Round