
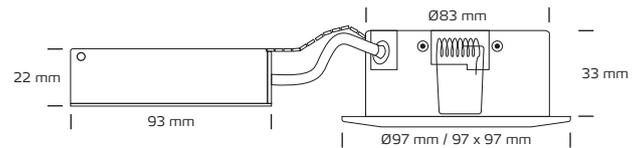


# Low Profile Deluxe 6W, 3000K

## Technical data

Voltage	220-240 VAC 50 Hz
System effect	6W
Light source	Replaceable Nordtronic LED light source
Colour temperature	3000 Kelvin
Light intensity	460 Lumen
Colour rendering	CRI>82
Expected lifespan	50.000 hours L70
Dimmable, how	Yes, trailing edge
SDCM	≤3
Beam angle	35°
Carving dimensions	Ø83 mm
Installation height	33 mm
Exterior dimensions	Ø97 mm / 97 x 97 mm
Dimensions driver	L: 93, W: 45 mm, H: 22 mm
Tilt angle	30°
Possibility of through wiring	Yes, 3G1.5 - 30 pcs.
IP-class	IP44 (is intended for installation in areas 1 and 2)
Insulation class	Class II
Material	Aluminium, plastic
Environment	Indoors
Warranty	5 years
Approvals	CE

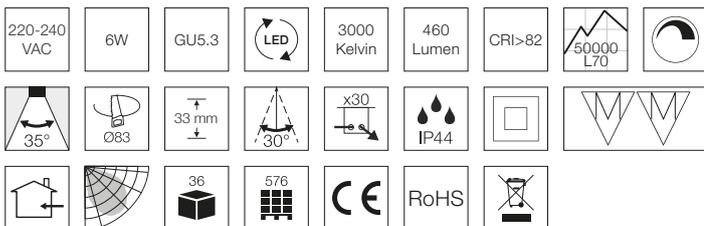

\*The drawing is not drawn to scale

## Product information

- Approved for installation directly in the insulation and flammable materials
- Can be mounted in acoustic ceiling
- Replaceable Nordtronic LED light source
- Low mounting depth
- Quick and easy mounting
- Mounting with springs
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Designed and developed in Denmark

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
3571	5704629035713	Matt white	Round
3572	5704629035720	Brushed alu	Round
3573	5704629035737	Matt white	Square
3574	5704629035744	Brushed alu	Square
3578	5704629035782	Copper	Round
3579	5704629035799	Matt black	Round

## Light source 6W

Item no.	EAN no.	Variant	Type
1930	5704629019300	2700K 430lm	Dimmable
1931	5704629019317	3000K 460lm	Dimmable
1932	5704629019324	4000K 494lm	Dimmable