


Uni Install 5W, 2700K

Technical data

Hole diameter:	Ø75 mm
Height:	63 mm
Front size:	Ø87 mm or 87 x 87 mm
Voltage:	220-240VAC 50 Hz
System effect:	Max. 7.5W LED
Socket:	GU10
Light source:	5W LED, 2700 Kelvin
Light intensity:	430 Lumen
Colour rendering:	CRI>80
Beam angle:	38°
Dimmable:	Yes
Tilt angle:	30°
IP-class:	IP44
Insulation class:	Class II
Material:	Plastic, aluminium
Possibility of through wiring:	Yes (3G1.5)

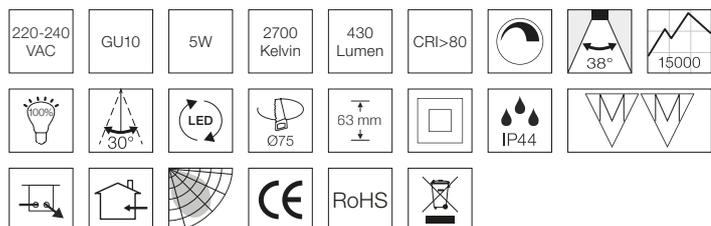


Product information

- Approved for installation directly in the insulation and flammable materials
- Low mounting depth
- Quick and easy mounting
- Mounting with screws or adjustable springs
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Adjustable springs for ceiling thickness up to 44 mm
- Adjustable screws for ceiling thickness up to 35 mm
- Designed and developed in Denmark

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
2421	5704629024212	Matt white	Round
2422	5704629024229	Brushed aluminium	Round
2423	5704629024236	Matt white	Square
2424	5704629024243	Brushed aluminium	Square
2427	5704629024274	Chrome	Round
2428	5704629024281	White	Round
2429	5704629024298	White	Square
2430	5704629024304	Matt black	Round

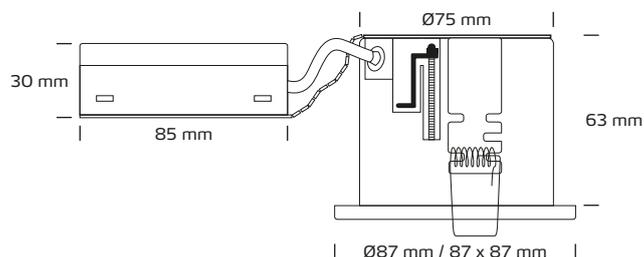

*The drawing is not drawn to scale

This luminaire is compatible with bulbs of the energy classes:

The luminaire is sold with a bulb of the energy class: **A+**

LED Downlight

874/2012