


Uni Install 5W outdoor, 3000K


Technical data

Hole diameter:	Ø75 mm
Height:	63 mm
Front size:	Ø87 mm
Voltage:	220-240VAC 50 Hz
System effect:	Max. 7.5W LED
Socket:	GU10
Light source:	5W LED, 3000 Kelvin
Light intensity:	450 Lumen
Colour rendering:	CRI>80
Beam angle:	38°
Dimmable:	Yes
Tilt angle:	30°
IP-class:	IP44
Insulation class:	Class II
Material:	Plastic, acid resistant stainless steel AISI 316
Possibility of through wiring:	Yes (3G1.5)

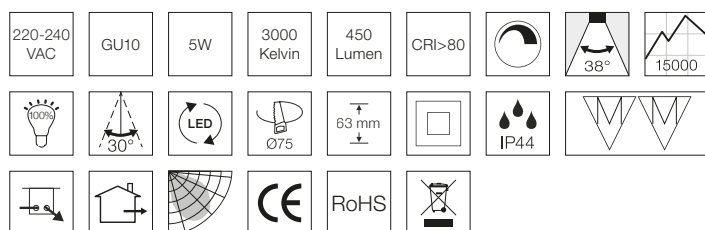


Product information

- Approved for installation directly in the insulation and flammable materials
- Low mounting depth
- Quick and easy mounting
- Mounting with screws or adjustable springs
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Adjustable springs for ceiling thickness up to 44 mm
- Adjustable screws for ceiling thickness up to 35 mm
- Designed and developed in Denmark

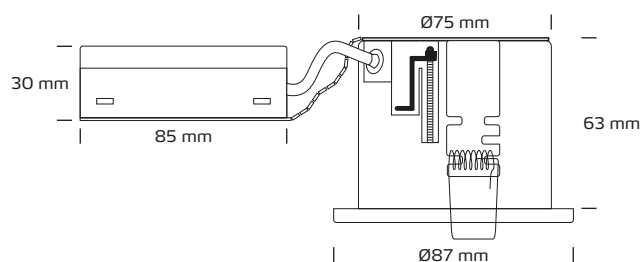

*The drawing is not drawn to scale

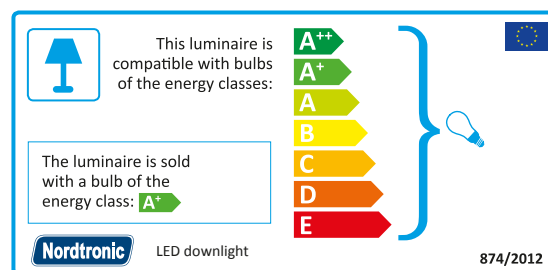

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
2493	5704629024939	White	Round
2494	5704629024946	Brushed steel	Round
2498	5704629024984	Black	Round