


Master Uni Install 5W outdoor, 3000K



Technical data

Hole diameter:	Ø75 mm
Height:	63 mm
Front size:	Ø87 mm
Voltage:	220-240VAC 50 Hz
System effect:	Max. 7.5W LED
Socket:	GU10
Light source:	5W LED, 3000 Kelvin
Light intensity:	450 Lumen
Colour rendering:	CRI>80
Beam angle:	38°
Dimmable:	Yes
Tilt angle:	30°
IP-class:	IP44
Insulation class:	Class II
Material:	Plastic, acid resistant stainless steel AISI 316
Possibility of through wiring:	Yes (3G1.5)
Max. dimmer last:	23 pcs. Uni Install 5W (slave) @ Ta 30° C

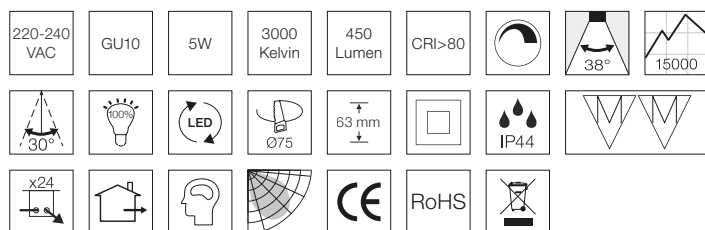

Product information

- Approved for installation directly in the insulation and flammable materials
- Low mounting depth
- With built-in dimmer and memory function
- Adjustable min. setting for dimming
- Max. load 120W @ Ta 30° C
- Quick and easy mounting
- Mounting with screws or adjustable springs
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Adjustable springs for ceiling thickness up to 44 mm
- Adjustable screws for ceiling thickness up to 35 mm
- Designed and developed in Denmark

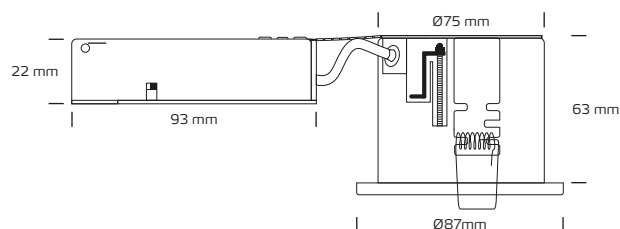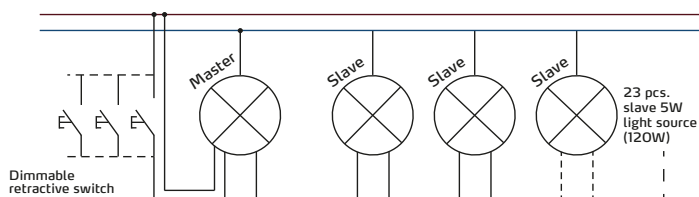

This luminaire is compatible with bulbs of the energy classes:

The luminaire is sold with a bulb of the energy class: **A+**

A++
A+
A
B
C
D
E

Nordtronic LED Downlight

874/2012

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
12493	5704629124936	White	Round
12494	5704629124943	Brushed steel	Round