
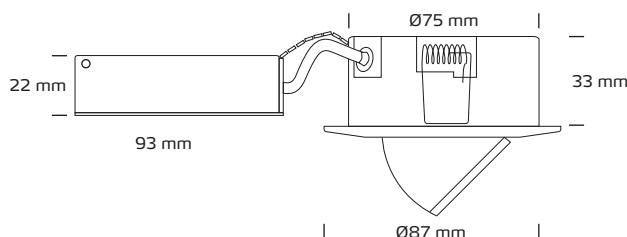


Low Profile Large Tilt 6W, 3000K

Technical data

Voltage	220-240 VAC 50 Hz
System effect	6W
Light source	Replaceable front with Nordtronic LED light source
Colour temperature	3000 Kelvin
Light intensity	460 Lumen
Colour rendering	CRI>82
Expected lifespan	50.000 hours L70
Dimmable, how	Yes, trailing edge
SDCM	≤3
Beam angle	35°
Carving dimensions	Ø75 mm
Installation height	33 mm
Exterior dimensions	Ø87 mm
Dimensions driver	L: 93, W: 45 mm, H: 22 mm
Tilt angle	45°
Possibility of through wiring	Yes, 3G1.5 - 30 pcs.
IP-class	IP44 (is intended for installation in areas 1 and 2)
Insulation class	Class II
Material	Aluminium, plastic
Environment	Indoors
Warranty	5 years
Approvals	CE

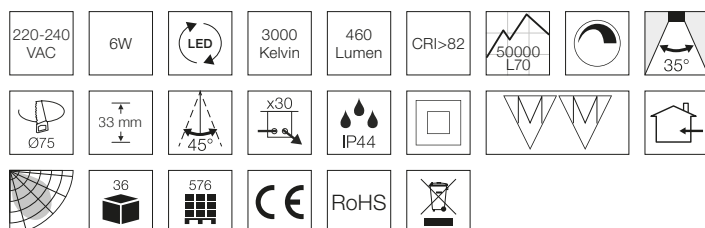

*The drawing is not drawn to scale

Product information

- Approved for installation directly in the insulation and flammable materials
- Replaceable front with Nordtronic LED light source
- Low mounting depth
- 45° tilt angle, perfect for use in sloped ceiling, wardrobe, gallery lighting etc.
- Quick and easy mounting
- Mounting with springs
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Designed and developed in Denmark

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
3751	5704629037519	Matt white	Round
3752	5704629037526	Brushed alu	Round