
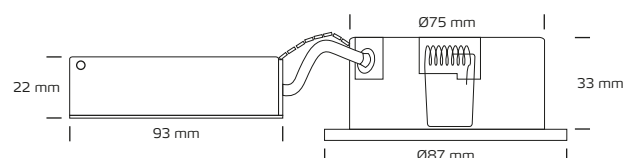


## Low Profile 6W outdoor, 4000K

### Technical data

Voltage	220-240 VAC 50 Hz
System effect	6W
Light source	Replaceable Nordtronic LED light source
Colour temperature	4000 Kelvin
Light intensity	494 Lumen
Colour rendering	CRI>82
Expected lifespan	50.000 hours
Dimmable, how	Yes, trailing edge
SDCM	≤3
Beam angle	35°
Carving dimensions	Ø75 mm
Installation height	33 mm
Exterior dimensions	Ø87 mm
Dimensions driver	L: 93, W: 45 mm, H: 22 mm
Tilt angle	30°
Possibility of through wiring	Yes, 3G1,5 - 30 pcs.
IP-class	IP44 (is intended for installation in areas 1 and 2)
Insulation class	Class II
Material	Plastic, acid resistant stainless steel AISI 316
Environment	Outdoors
Warranty	5 years
Approvals	CE

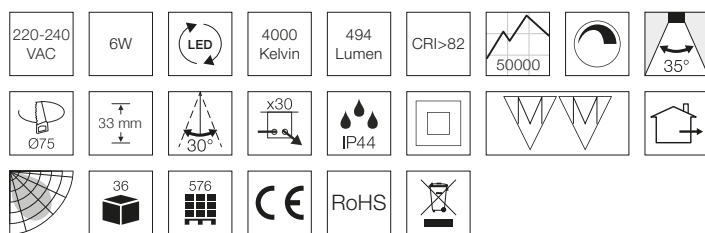

\*The drawing is not drawn to scale

### Product information

- Approved for installation directly in insulation and flammable materials
- Low mounting depth
- Quick and easy mounting
- Mounting with springs
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Designed and developed in Denmark

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
3691	5704629036918	White	Round
3692	5704629036925	Brushed steel	Round
3699	5704629036994	Black	Round

### Accessories

Item no.	EAN no.	Type
1890	5704629018907	2700K 430lm
1891	5704629018914	3000K 460lm
1892	5704629018921	4000K 494lm