


Indoor light

# RS PRO Connect 5100 LED

Slave

EAN 4007841 052904

**STEINEL**<sup>®</sup>  
PROFESSIONAL



**LED**

**30w**



4000K neutral white



shock proof IK07



connectable via bluetooth

**5 JAHRE**  
HERSTELLER  
GARANTIE

manufacturer's warranty  
steinel-professional.de/garantie



CE



ENEC 05

## Function description

LED diffuser luminaire as slave version. Without sensor. Bluetooth takes the effort out of interconnecting luminaires and setting their parameters. Energy-efficient lighting with 4200 lm luminous flux from 30 W. Colour temperature: 4000 K. Sturdy, highly practical and easily installed. For multi-storey car parks, basements, industrial and sports buildings, garages, corridors etc.

## Technical specifications

Dimensions (L x W x H)	1370 x 87 x 58 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	30 W
Interconnection	Yes
Luminous flux	4200 lm
Colour temperature	4000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	60000 h
Drop in luminous flux in accordance with LM80	L80B10
Base	without
LED cooling system	Passive Thermo Control
With motion detector	No
Electronic scalability	Yes

Main light adjustable	50 - 100 %
Continuous light	selectable
Photo-cell controller	No
Basic light level function	Yes
Basic light level function time	10-30 min, all night
Soft light start	No
Impact resistance	IK07
IP-rating	IP66
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Plastic
Cover material	Plastic, structured
Manufacturer's Warranty	5 years
Settings via	Bluetooth
Version	Slave
PU1, EAN	4007841052904

Indoor light


# RS PRO Connect 5100 LED

Slave

EAN 4007841 052904

**STEINEL**<sup>®</sup>  
PROFESSIONAL

## Dimension Drawing

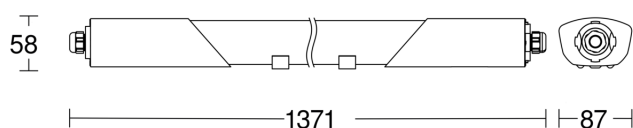

## Master/slave interconnection circuit diagram

